


SeaRox® LM 915 ALU

SeaRox LM 915 ALU is a flexible stone wool insulation mat bonded onto fibreglass reinforced ALU foil.

Application

SeaRox LM 915 ALU is used for thermal and acoustic insulation of pipes, tanks and ventilation ducts.

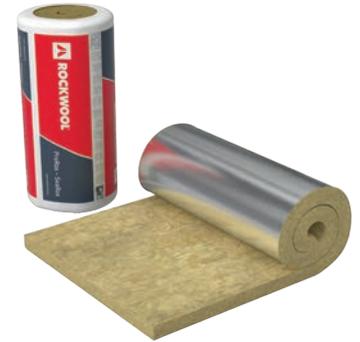

Product properties

Properties	Performance		Norm
Thermal conductivity	T (°C)	10	EN 12667
	λ (W/mK)	0,038	
Nominal density	42-45 kg/m ³		EN 1602 / IMO
Compressive strength	-		EN 826
Fire classification	Non-combustible		IMO 2010 FTP Code
	Low flame-Spread Properties		
Water absorption (short term)	< 1 kg/m ²		EN 1609 AC
Max. service temp.	Wool: 250°C		-
	Facing: 80°C		
Sound absorption directly mounted	-		ISO 354 (approximated) Evaluated after ISO 11 654
Facings	Reinforced alu foil		IMO 2010 FTP Code

Dimensions

SeaRox LM 915 ALU

Thickness (mm): 20 mm Length (mm): 9350 mm Width (mm): 500mm
 Thickness (mm): 30 mm Length (mm): 6100 mm Width (mm): 500mm
 Thickness (mm): 40 mm Length (mm): 4650 mm Width (mm): 500mm
 Thickness (mm): 50 mm Length (mm): 3550 mm Width (mm): 500mm



0575

As ROCKWOOL has no control over insulation design and workmanship, accessory materials or applications conditions, ROCKWOOL does not warranty the performance or result of any installation containing ROCKWOOL products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose. ROCKWOOL Technical Insulation reserves the right to make necessary product changes at any time. Technical specifications are thus stated subject to change.

ROCKWOOL® Technical Insulation, ROCKWOOL®, SeaRox® and ProRox® are registered trademarks of ROCKWOOL International A/S and cannot be used without a prior written consent.