

Click here for
**Commercial
Applications**



Click here for
**Residential
Applications**



Click here for
**Roofing
Applications**



The world leader in stone wool insulation
Le leader mondial de l'isolation en laine de roche



Commercial Applications

Building Insulation Product Overview

CAVITYROCK®
Cavity Wall and Rainscreen Brochure

CAVITYROCK®
Technical Data Sheet

COMFORTBATT®
Technical Data Sheet

COMFORTBOARD™ 110
Thermal Insulated Sheathing Brochure

COMFORTBOARD™ 110
Technical Data Sheet

ROCKWOOL AFB®
Acoustical Fire Batt Brochure

ROCKWOOL AFB®
Technical Data Sheet

ROCKWOOL AFB evo™
Technical Data Sheet

CURTAINROCK® & ROXUL SAFE™
Perimeter Fire Containment Systems Brochure

CURTAINROCK®
Technical Data Sheet

CURTAINROCK® 40
Technical Data Sheet

CURTAINROCK® 80
Technical Data Sheet

ROXUL SAFE™
Technical Data Sheet

ROCKBOARD®
Multipurpose Board Brochure

ROCKBOARD® 40
Technical Data Sheet

ROCKBOARD® 60
Technical Data Sheet

ROCKBOARD® 80
Technical Data Sheet

ROXUL SAFE™ 55 & 65 & ROCKWOOL PLUS™ MB
Metal Buildings Brochure

ROXUL SAFE™ 55
Technical Data Sheet


ROXUL SAFE™ 65
Technical Data Sheet

ROCKWOOL PLUS™ MB
Technical Data Sheet



Click on any of the above brochures or data sheets to be directed to that specific document.

Visit www.rockwool.com for our full Product Documentation Library.

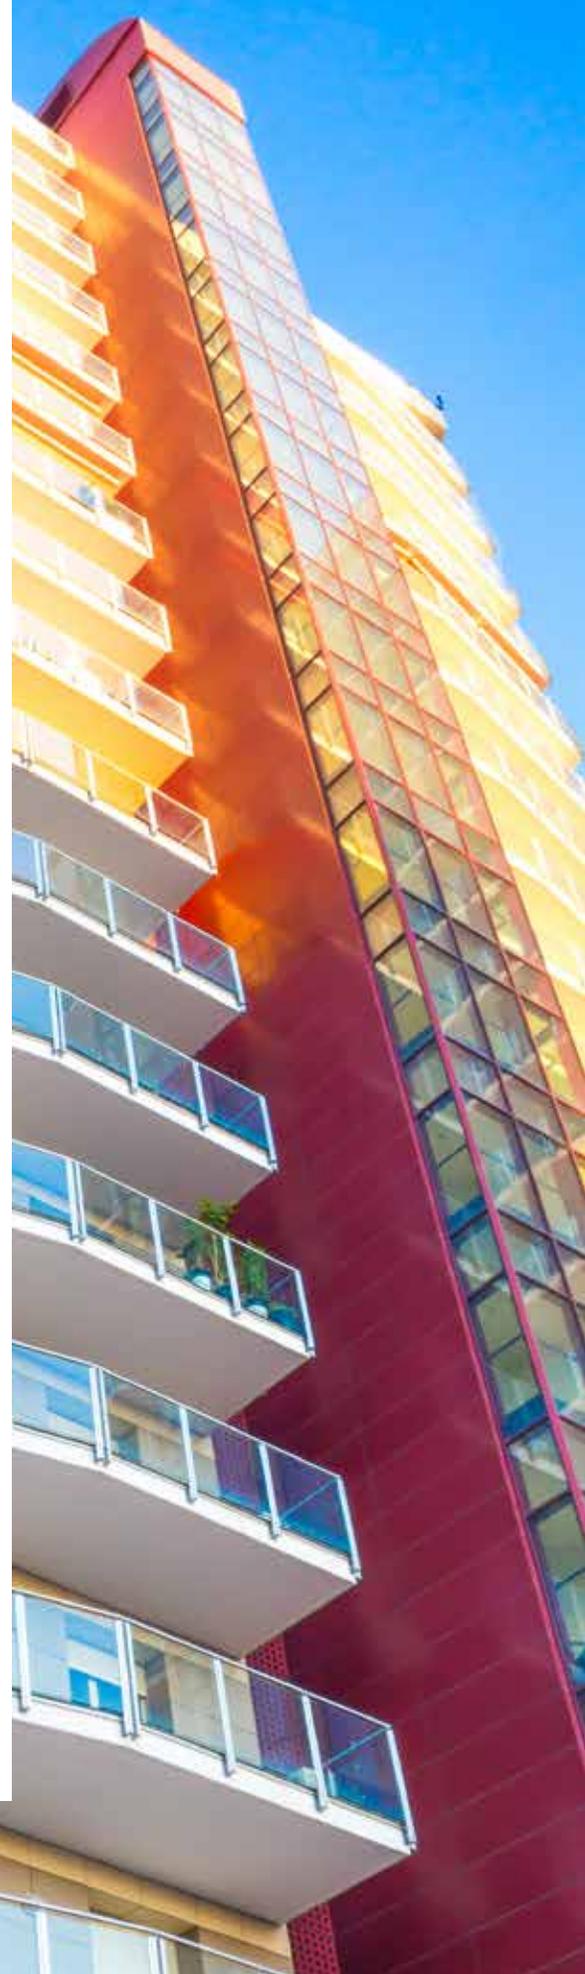

Products	Standard Thickness	Dimensions (WxL)	Density pcf (Kg/m ³)	R-value Per Inch	Fire		Acoustic (at 3" Thickness)		Corrosive Resistance	Compliance				
Interior Wall					ASTM E 136 & CAN/ULC S114	ASTM E 84 (UL 723)	ASTM C 423 250Hz 500Hz 1000Hz 2000Hz		ASTM C 423 NRC	ASTM C 665	ASTM C 665	CAN/ULC S702	ASTM C 553	UL Design Nos.
AFB®	1"-4", 0.5" increments, 5", 6"	16"x48", 24"x48"	2.5 (40) >= 3", 2.8 (45) < 3"	N/A	Non-combustible	Complies	0.96 1.18 1.07 1.05	1.05	Pass	Type 1, Complies	Type 1, Complies	Type 7, Complies	Consult UL/ULC Listings	
AFB evo™	1"-4", 0.5" increments, 5", 6"	16"x48", 24"x48"	2.5(40) >= 3", 2.8 (45) < 3"	N/A	Non-combustible	Complies	0.96 1.18 1.07 1.05	1.05	Pass	Type 1, Complies	Type 1, Complies	Type 7, Complies	Consult UL/ULC Listings	
Exterior Wall Batt					ASTM E 136 & CAN/ULC S114	ASTM E 84 (UL 723)	ASTM C 423 250Hz 500Hz 1000Hz 2000Hz		ASTM C 423 NRC	ASTM C 665	ASTM C 665	CAN/ULC S702	ASTM C 553	UL Design Nos.
COMFORTBATT® Steel Stud	2.5", 3.5", 6" (CAN) 2.5", 3.5", 6", 7.25" (USA)	16.25"x48", 24.25"x48"	>2 (>32)	R10-R24 (CAN) R10-R30 (USA)	Non-combustible	Complies	N/A		N/A	Pass	Type 1, Complies	Type 1, Complies	N/A	N/A
COMFORTBATT® Wood Stud	3.5", 5.5", 7.25", 8" (CAN) 3.5", 5.5", 7.25" (USA)	15.25"x47", 23"x47"	>2 (>32)	R14-R32 (CAN) R15-R30 (USA)	Non-combustible	Complies	N/A		N/A	N/A	Type 1, Complies	Type 1, Complies	N/A	N/A
Exterior Wall Rainscreen & Cavity Wall					ASTM E 136 & CAN/ULC S114	ASTM E 84 (UL 723)	ASTM C 423 250Hz 500Hz 1000Hz 2000Hz		ASTM C 423 NRC	ASTM C 665	ASTM C 1104	ASTM C 1338	ASTM E 96	ASTM C 612
CAVITYROCK®	1" - 4", 0.5" increments, 5", 6"	16"x48", 24"x48"	6.2 / 4.1 (100 / 65) 5.3 (85) 1"-1.5", 4.4 (70) 2"	4.3	Non-combustible	Complies	0.93 0.88 0.84 0.90	0.90	Pass	0.03%	Zero Growth	27 perms	Type IVB, Complies	
Insulated Sheathing for Continuous Insulation					ASTM E 136 & CAN/ULC S114	ASTM E 84 (UL 723)	ASTM C 423 250Hz 500Hz 1000Hz 2000Hz		ASTM C 423 NRC	ASTM C 665	ASTM C 1104	ASTM C 165 @10% @25%	ASTM E 96	ASTM C 612
COMFORTBOARD™ 110	1", 1.25", 2", 2.5", 3"	24"x48", 48"x72"	11 (176)	4	Non-combustible*	Complies	0.71 0.85 0.90 0.96	0.85	Pass	0.28%	584 1566	35 perm	Type IVB, Complies	
COMFORTBOARD™ 80	1.25", 1.5", 2", 2.5", 3"	48"x24", 48"x36", 48"x72", 48"x96"	8 (128)	4	Non-combustible*	Complies	0.78 0.90 0.97 0.97	0.90	Pass	0.05%	439 1065	31 perm	Type IVB, Complies	
Curtain Wall Systems					ASTM E 136 & CAN/ULC S114	ASTM E 84 (UL 723)	ASTM C 423 250Hz 500Hz 1000Hz 2000Hz		ASTM C 423 NRC	ASTM C 665	ASTM C 1104	UL/ULC Design Nos.		ASTM C 612
CURTAINROCK®	1", 1.5", 2", 3", 4", 5"	24"x48"	3.5 (56)	4.2	Non-combustible	Complies	0.95 1.14 1.01 1.03	1.05	Pass	0.01%	Consult UL/ULC Listings		Type IVB, Complies	
CURTAINROCK® 40	2", 3", 4"	24"x48", 48"x72"	4 (64) Nominal	4.3	Non-combustible	Complies	N/A		N/A	Pass	0.01%	Consult UL/ULC Listings		Type IVB, Complies
CURTAINROCK® 80	1", 2", 3", 4"	24"x48", 48"x72"	8 (128) Nominal	4.3	Non-combustible	Complies	N/A		N/A	Pass	0.04%	Consult UL/ULC Listings		Type IVB, Complies
ROXUL SAFE™	2", 3", 4"	24"x48"	4.5 (72)	N/A	Non-combustible	Complies	N/A		N/A	Pass	0.04%	Consult UL/ULC Listings		Type IVA, Complies
Multi-Purpose Boards					ASTM E 136 & CAN/ULC S114	ASTM E 84 (UL 723)	ASTM C 423 250Hz 500Hz 1000Hz 2000Hz		ASTM C 423 NRC	ASTM C 665	ASTM C 1104	Facing Options		ASTM C 612
ROCKBOARD® 40	2", 2.5", 3", 4"	24"x48"	4 (64)	4.2	Non-combustible	Complies	0.95 1.14 1.01 1.03	1.05	Pass	0.03%	Foil Faced, Black Mat		Type IVA, Complies	
ROCKBOARD® 60	2", 3", 3.5", 4"	24"x48"	6 (96)	4.3	Non-combustible*	Complies	0.89 1.04 0.98 1.01	1.00	Pass	0.07%	Foil Faced, Black Mat		Type IVB, Complies	
ROCKBOARD® 80	1", 1.5", 2", 3", 4"	24"x48"	8 (128)	4	Non-combustible*	Complies	0.82 0.89 0.94 1.00	0.90	Pass	0.05%	Foil Faced, Black Mat		Type IVB, Complies	
Metal Building					ASTM E 136 & CAN/ULC S114	ASTM E 84 (UL 723)	ASTM C 665	ASTM C 1104	UL Design Nos.		ASTM C 612	ASTM C 553	DISCLAIMER AND LIMITATION OF LIABILITY: The statements and data contained in this brochure are for general information purposes ONLY. They are NOT specific technical recommendations as to any particular design or application and the ultimate determination as to product suitability is the sole responsibility of the installer or end user. Although the information contained herein, including ROCKWOOL product descriptions, is believed to be correct at the time of publication, accuracy cannot be guaranteed. ROCKWOOL fully reserves the right to make product specification changes, without notice or obligation, and to modify or discontinue any of its products at any time. In no event shall ROCKWOOL be liable for any direct, indirect, or consequential damages of any kind arising from information contained in this brochure, including, but not limited to, claims for loss of profits, business interruption, or damages to business reputation. This limitation of liability shall apply to all claims whether those claims are based in contract, tort, or any legal cause of action.	
ROXUL SAFE™ 65	3"	24"x48", 31.5"x48", 32"x48"	6 (96) Nominal	4.2	Non-combustible	Complies	Pass	0.04%	Consult UL/ULC Listings	Type IVB, Complies	N/A			
ROXUL SAFE™ 55	4"	24"x48", 31.5"x48", 32"x48"	4.5 (72) Nominal	4.2	Non-combustible	Complies	Pass	0.04%	Consult UL/ULC Listings	Type IVB, Complies	N/A			
ROCKWOOL PLUS™ MB	2"-4", 0.5" increments, 5", 6"	24"x48"	2 (32)	4	Non-combustible	Complies	Pass	0.03%	N/A	N/A	Type I, II, III			

*Applies to CAN/ULC S114 only.

Return to Commercial Applications



CAVITYROCK® and COMFORTBATT®

Effective Insulation Solutions – The Future
of High-Performance Rainscreen Systems





Over 60,000 sq. ft. of ROCKWOOL CAVITYROCK® was installed in the Rush University Medical Center's 14-story hospital in Chicago. (Also shown on front cover.) Rush is seeking gold leadership in energy and environment design (LEED®) certification for the new hospital. "From the beginning, it's been designed to use water and energy efficiently and keep down waste. We're using environmentally responsible building materials, and we're recycling as much as we possibly can," says Mick Zdeblick, vice president, campus transformation.*

*<http://transforming.rush.edu>

The Building Envelope Design using ROCKWOOL [BEDR™] Wall System Philosophy

Evolution of Rainscreen Systems

The primary functions of a wall system* – to protect, facilitate, and/or provide heat, air, rain penetration, movement of moisture, fire, durability, noise, light, strength, and aesthetics – have not changed over the past 40 years. The same cannot be said for the components and design of cavity wall systems, which have undergone a significant transformation in North America.

This change in design requirements is a result of the increased code requirements that are based on changing ASHRAE standards. Increasing requirements also ask for continuous insulation (c.i.) to meet the R-value and U-value requirements of ASHRAE 90.1.


ROCKWOOL is at the forefront of developing wall systems that meet this call for higher energy efficiency, sustainability, durability and better overall performance in commercial buildings.

*Canadian Building Digest, NRC National Research Council Canada

The ROCKWOOL Difference

The R-value of ROCKWOOL insulation does not change over time because stone wool is not produced with blowing agents, which off-gas and result in lower thermal performance. Not only is the thermal performance of ROCKWOOL insulation maintained over its lifetime, but the wall system's thermal performance is maintained because ROCKWOOL products are dimensionally stable.

ROCKWOOL insulation will not slump in stud spacing causing gaps, will not expand or contract due to temperature variances in the rainscreen system, nor is it adversely affected by the presence of moisture in the system, all of which contribute to the optimal thermal performance of a building envelope. ROCKWOOL insulation is made from stone and is non-combustible with an extremely high melting point, making it the safest insulation when compared to both fiberglass and foam plastics.

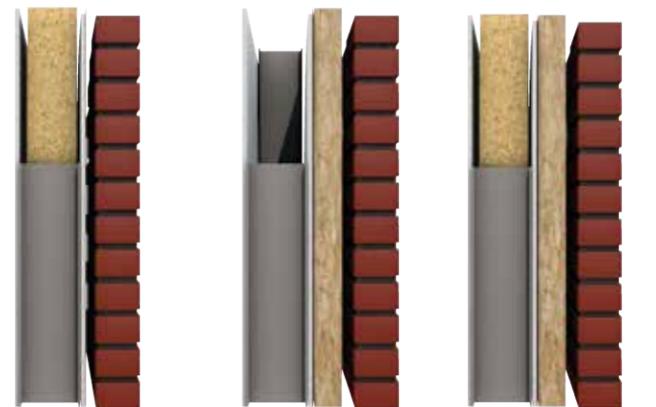

1970

All insulation in the stud wall with building paper on the exterior. No cavity wall insulation used.

1990

All insulation in the cavity with no insulation in the steel stud. High-performance air/vapor barriers used.

2010

A combination of insulation within the steel stud and cavity. Vapor permeable air barriers used.

The Future of High-Performance Rainscreen Systems

- ✓ Stable Long-Term Thermal Resistance
- ✓ Sound Absorbent
- ✓ Fire Resistant
- ✓ Vapor Permeable
- ✓ Continuous Insulation
- ✓ Environmentally Sustainable

The BEDR™ Wall Rainscreen System

The ROCKWOOL BEDR™ Wall Rainscreen System comprises ROCKWOOL thermal batt insulation in the exterior stud wall cavity (up to 6"), combined with a high-density, semi-rigid ROCKWOOL insulation board (up to 6") in the external cavity.

ROCKWOOL insulation within the exterior wall stud cavity and the external cavity offers superior long-term thermal efficiency, fire resistance, moisture control, and acoustic performance.

BEDR™ Rainscreen System Zone 4-8

Components: Cladding, Air space, CAVITYROCK®, Permeable air barrier, Exterior gypsum board sheathing, Steel stud, COMFORTBATT®, Vapor barrier, Gypsum board.

Note: In climates dominated by heating degree days (HDDs), the blue air barrier material should be vapor permeable.



ROCKWOOL COMFORTBATT® and CAVITYROCK®-BEDR™ Wall Combination

ROCKWOOL COMFORTBATT®

The COMFORTBATT® product line is a non-combustible, semi-rigid batt insulation range that is designed for exterior steel stud wall applications.

COMFORTBATT® products are available from 2.5" to 8" in thickness and have standard R-values ranging from R10 to R32. Stone wool batt insulation will not slump inside the wall cavity over time. COMFORTBATT® products also provide excellent sound absorption characteristics.



ROCKWOOL CAVITYROCK®

ROCKWOOL CAVITYROCK® products are non-combustible, semi-rigid insulation boards specifically engineered for exterior cavity wall and rainscreen applications.

CAVITYROCK® is available in sizes from 1" to 6" in thickness, in .5" increments. The products available in 1" to 2" thicknesses are mono-density solutions offering thermal resistance of R4.2/in. These products are suggested when lower exterior thermal resistance is required.

The CAVITYROCK® products available from 2.5" to 6" thicknesses are produced with dual-density technology offering a high-density outer layer and a lower-density inner layer. The high-density outer layer offers greater rigidity and water repellency, while the inner layer helps to conform to architectural features. These products offer R4.3/in thermal resistance values and allow the designer to reach higher exterior insulation thermal requirements when necessary.

ROCKWOOL CAVITYROCK® products are compatible with numerous framing systems and cladding attachment systems. To learn more visit rockwool.com

Why this BEDR™ Wall is a Better Wall?

Dimensional Stability

The dimensional stability of an insulation material is necessary for the faultless function of an insulation system. Dimensional changes in materials vary according to their physical properties. Thermal expansion coefficients express the rate at which materials shrink or expand when cooled or heated. ROCKWOOL insulation has a much smaller thermal expansion coefficient than organic insulation materials such as foam plastics.

Poor dimensional stability can cause shrinking, expansion, and buckling of a system's insulation. These actions can lead to thermal bridging, waterproofing breaches, and unpredictable insulation performance.

Long-Term Thermal Performance


As the building industry seeks new and innovative solutions that are truly energy efficient, ROCKWOOL leads the way in developing wall systems with excellent long-term thermal performance. This is the result of two inherent properties in its BEDR™ insulating systems – lack of thermal loss due to dimensional changes, and the insulation's ability to repel water, which aids in the control of heat loss and gain.

The use of CAVITYROCK® as a continuous insulation (c.i.) results in a BEDR™ wall with higher effective thermal resistance values than foam plastics.

Material Type	Expansion Co-Efficient 10-6 m/m°C	Expansion at Temp. Difference of 50°C or 90°F over 10 m./33 ft.
Stone Wool	5.5	3
Concrete	12	6
Steel	12	6
Expanded Polystyrene	70	35
Extruded Polystyrene	80	40
Polyurethane	100	50
Polyisocyanurate	120	60

Water Vapor Permeance

The water vapor permeance of ROCKWOOL insulation allows for increased potential for drying without trapping transient moisture in the assembly. ROCKWOOL CAVITYROCK® and COMFORTBATT® are water repellent yet vapor permeable insulation products, and will allow transient vapors to pass through without restriction. Lower permeable insulations such as foam plastics can work as vapor retarders and can greatly affect the drying potential of many typical building assemblies.

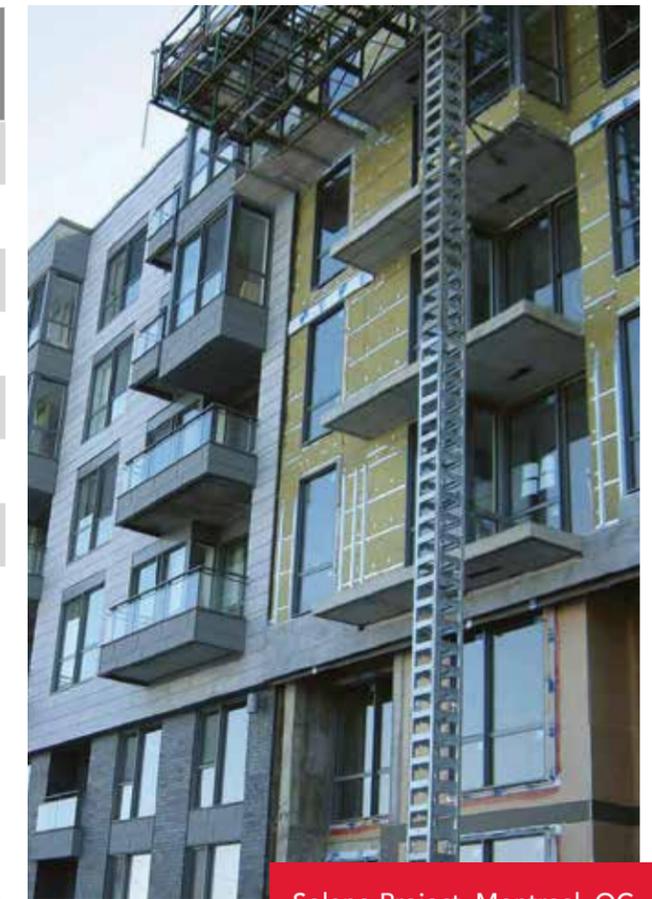


Soleno Project, Montreal, QC
ROCKWOOL CAVITYROCK®



Meeting the Challenges of Today's Climate Zones

ASHRAE – History of R-Value Requirements

The American Society of Heating, Refrigerating and Air Conditioning Engineers (ASHRAE) is an international Society of technical individuals who provide knowledge to the building industry on heating, ventilation, air-conditioning, and refrigeration (HVAC&R). The Society developed ASHRAE 90.1, an energy conservation standard that provides the minimum requirements for energy-efficient buildings. This standard, or an equivalent, is applied today in many states for commercial, government and high-rise building applications. In Canada, look to the National Building Code and refer to section A-5.3.1.2 for information on condensation and energy conservation standards.

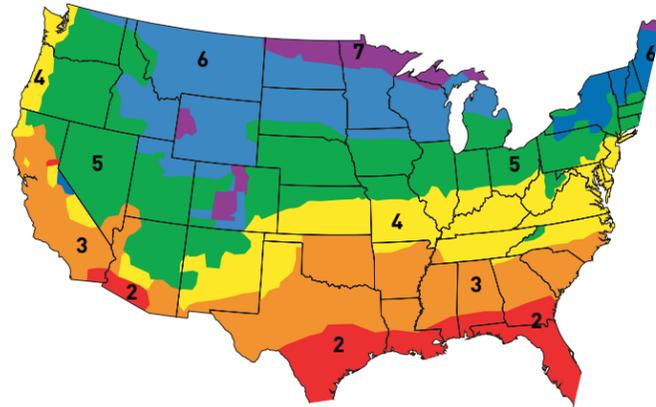

ASHRAE Map of Climate Zones

Every rating agency has its own maps that divide regions into thermal or climate zones to tailor codes and standards to what is appropriate for that particular region.

ASHRAE 90.1 2013 All Buildings Non-Residential Specific to Cavity Wall/Rainscreen Requirements by Climate Zone

City/State	Climate Zone	Mass*	Metal Framed**
Miami, FL	1	NR	R13
Tampa, FL	2	R5.7 ci	R13 + R3.8 ci
Charleston, SC	3	R7.6 ci	R13 + R5 ci
New York, NY	4 (except marine)	R9.5 ci	R13 + R7.5 ci
Spokane, WA	5 (and marine)	R11.4 ci	R13 + R10 ci
Milwaukee, WI	6	R13.3 ci	R13 + R12.5 ci
Anchorage, AK	7	R15.2 ci	R13 + R12.5 ci
Nome, AK	8	R19 ci	R13 + R18.8 ci

* Wall without Steel Studs eg. Concrete
 ** Steel Stud and Cavity Wall

Canadian Equivalents to US Climate Zones

City	Province	Climate Zone
Vancouver	British Columbia	5
Calgary	Alberta	7
Regina	Saskatchewan	7
Winnipeg	Manitoba	7
Toronto	Ontario	6
Montreal	Quebec	6
Halifax	Nova Scotia	6

ASHRAE Correction Factors for Metal Wall Framing

Metal Stud Size	Stud Spacing O.C.	Cavity Insulation*	Correction Factor	Effective R-value
2x4	16"	R11	0.50	5.50
		R13	0.46	6.00
		R15	0.43	6.40
	24"	R11	0.60	6.60
		R13	0.55	7.20
		R15	0.52	7.80
2x6	16"	R19	0.37	7.10
		R21	0.35	7.40
	24"	R19	0.45	8.60
		R21	0.43	9.00
2x8	16"	R25	0.31	7.80
	24"	R25	0.38	9.60

*Cavity Insulation = Steel Stud Wall Insulation

Build Your BEDR™ Wall Rainscreen System

COMFORTBATT®

R-value and Thickness	Canada Only		US Only		North America				Stated R-value
	R14 (3.5")	R15 (3.5")	R22.5 (6")	R24 (6")	R14 (3.5")	R15 (3.5")	R22.5 (6")	R24 (6")	
v	16"	24"	16"	24"	16"	24"	16"	24"	
R4.20 (1")	19.95	19.95	20.95	20.95	28.45	28.45	29.95	29.95	7.36
	12.15	13.45	12.35	13.75	13.85	15.55	14.45	16.25	8.96
R6.30 (1.5")	22.05	22.05	23.05	23.05	30.55	30.55	32.05	32.05	
	14.25	15.55	14.45	15.85	15.65	17.25	15.75	17.55	
R8.40 (2")	24.15	24.15	25.15	25.15	32.65	32.65	34.15	34.15	
	16.35	17.65	16.55	17.95	18.05	19.75	18.65	20.45	
R10.75 (2.5")	26.50	26.50	27.50	27.50	35.00	35.00	36.50	36.50	
	18.70	20.00	18.90	20.30	20.40	22.10	21.00	22.80	
R12.90 (3")	28.65	28.65	29.65	29.65	37.15	37.15	38.65	38.65	
	20.85	22.15	21.05	22.45	22.55	24.25	23.15	24.95	
R15.05 (3.5")	30.80	30.80	31.80	31.80	39.30	39.30	40.80	40.80	
	23.00	24.30	23.20	24.60	24.70	26.40	25.30	27.10	
R17.20 (4")	32.95	32.95	33.95	33.95	41.45	41.45	42.95	42.95	
	25.15	26.45	25.35	26.75	26.85	28.55	27.45	29.25	
R21.50 (5")	37.25	37.25	38.25	38.25	45.75	45.75	47.25	47.25	
	29.45	30.75	29.65	30.05	31.15	32.85	31.75	33.55	
No Insulation in Steel Stud	15.75	15.75	16.75	16.75	24.25	24.25	25.75	25.75	
	7.95	9.25	8.15	9.55	9.65	11.35	10.25	12.05	

CAVITYROCK®

Continuous Insulation (c.i.)

No Insulation in Steel Stud

No Insulation in the Exterior Cavity

- ✓ Units in h.ft² °F/BTU
- ✓ Effective Insulation/Framing Layer R-values between steel framing factors were obtained from ASHRAE 90.1-2013 Table A9.2-2
- ✓ Effective R-values are shown for thermal design only. Assumes **CAVITYROCK®** is installed as continuous insulation (c.i.).
- ✓ Moisture and condensation potential should be calculated for each assembly designed.
- ✓ **COMFORTBATT®** is also available in 2.5" for steel stud applications.

Effective R-values - Example Calculation

Components	R-values
Exterior Cladding	0
Air Film Ext.	0.17
1.5" Air Space	0
Insulation in the Cavity	6.3
Exterior Gypsum Sheathing	0.45
Stud Cavity Insulation	0.91
Gypsum	0.45
Air Film Int.	0.68
Total	8.96

For more detailed calculations, contact the ROCKWOOL Building Science team to discuss your specific wall design and your required performance level at 1-800-265-6878.




Superior Sound Absorption

Architects are increasingly choosing cladding façades on buildings, which, when compared to brick, tends to reduce the acoustical performance value of the wall system. With recent trends towards the use of new lightweight construction techniques and cladding materials, ROCKWOOL stone wool cavity wall insulation provides added acoustical value by outperforming traditional foam plastic insulation.

In a BEDR™ wall system, stone wool provides improved low frequency sound absorption to both normal and random incidents of noise. Reduced noise in the workplace can result in a more efficient and pleasant work environment for building occupants.


The stone wool fiber orientation and increased density of both CAVITYROCK® and COMFORTBATT®, compared to other types of insulation, effectively reduce sound transmission across the wall system. Greater noise or sound control is further achieved when thicker CAVITYROCK®, COMFORTBATT®, and gypsum board are used together.

ASTM E90 Sound Transmission Loss Test (Metal stud wall with exterior cladding system)

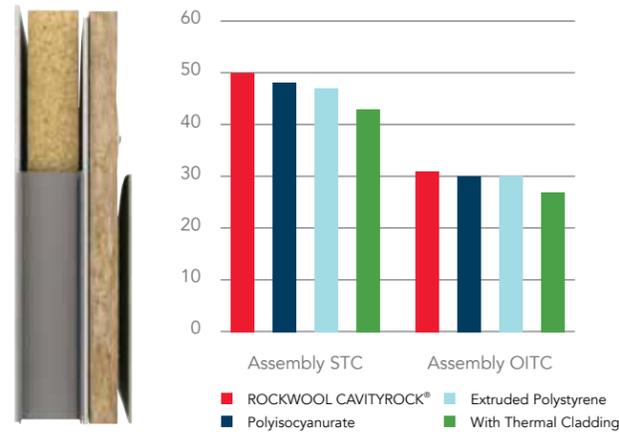

Test Wall: (Inside to Outside) 1/2" Gypsum, 6" Steel stud, ROCKWOOL COMFORTBATT® insulation, 5/8" Gypsum board, Air/Vapor retarder, ROCKWOOL CAVITYROCK® insulation, 3/8" Cement board cladding.

ASTM E90 Sound Transmission Loss Test (Metal stud wall without exterior cladding system)

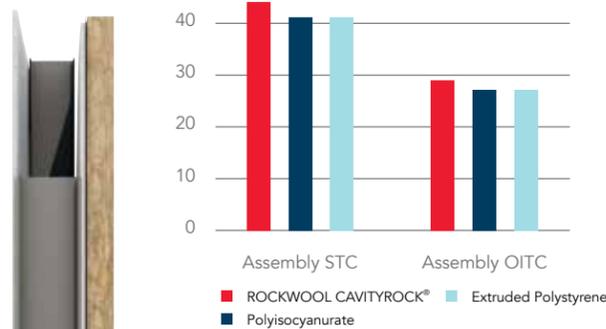

Test Wall: (Inside to Outside) 1/2" Gypsum, 6" Steel stud, Gypsum board, Air/Vapor retarder, ROCKWOOL CAVITYROCK® insulation, Airspace, 3/8" Cement board cladding.

CAVITYROCK® – Accoustical Performance

ASTM C423 - Co-Efficients at Frequencies

Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
1.5"	0.19	0.55	1.03	1.06	1.02	1.01	0.90
2.0"	0.26	0.71	1.14	1.09	1.04	1.03	1.00
3.0"	0.72	0.93	0.88	0.84	0.90	0.97	0.90




ROCKWOOL Stone Wool: Fire Resistant, Non-Combustible Insulation

A key feature of ROCKWOOL products is their fire resistance. CAVITYROCK® is classified as "non-combustible" as determined by ASTM E136 and CAN4-S114. It will not develop toxic smoke or promote flame spread, even when directly exposed to fire, as some other insulation materials do. When tested in accordance with ASTM E84, results typically show a flame spread of 0 and a smoke development of 0. By comparison, spray polyurethane foam (SPUF) results, when tested to ASTM E84, typically achieve a flame of 25 and smoke developed in the 350 to 500 range. ROCKWOOL CAVITYROCK® and COMFORTBATT® stone wool insulation have a melting point of approximately 2150°F (1177°C).

Fire Safety: Stone Wool Versus Foam

More recently, as a result of the Shanghai fire in 2010, new concerns have been raised about fire safety during construction. In the case of the Shanghai fire, foam insulation was ignited accidentally during construction and quickly spread through the building exterior. Because of these safety concerns, ROCKWOOL firmly believes in the added value that passive fire resistance provides for buildings.

Temperature Development in a Standard Fire (ASTM E119)

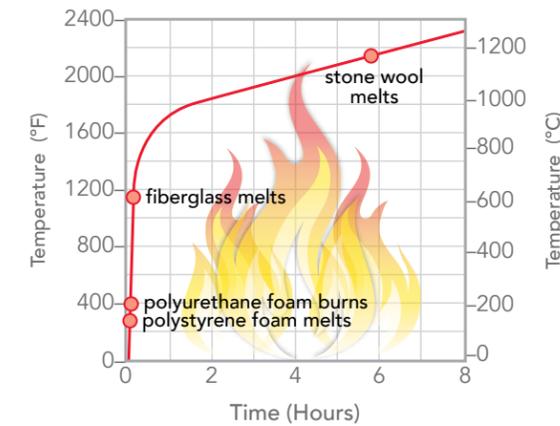

The severity of the Shanghai fire was partially a result of the use of urethane foam insulation, which aided in the spread of flame and smoke.

Fire Performance

Product	Specification	Test	Result
CAVITYROCK®	ASTM E136	Behavior of Materials at 1382°F (750°C)	Non-Combustible
CAVITYROCK®, COMFORTBATT®	CAN4 S114	Non-Combustibility in Building Materials	Non-Combustible
CAVITYROCK®	ASTM E84 (UL 723)	Surface Burning Characteristics	Flame Spread = 0 Smoke Developed = 0
CAVITYROCK®, COMFORTBATT®	CAN/ULC S102	Surface Burning Characteristics	Flame Spread = 0 Smoke Developed = 0



Moisture Management

Moisture Retention Comparison

To obtain a better understanding of the characteristics of in situ thermal insulation within cavity walls, a Certified Building Science Expert at ROCKWOOL reviewed two applicable scenarios in Seattle, Washington. The scenarios were modeled for a three-year period and the theoretical wall was located at mid-level of a high-rise on the western elevation. The charts below represent the first modeled scenario. Note that, in this scenario, CAVITYROCK® had much less moisture content over the same period than XPS foam insulation under the same conditions.

Wall with ROCKWOOL CAVITYROCK® [(Water Content (kg/m³))]

Layer/Material	Start of Calc.	End of Calc.	Min.	Max.
Brick (Old)	3.34	2.91	1.19	195.38
Air Layer 25 mm	1.88	2.07	0.46	23.48
ROCKWOOL CAVITYROCK®	0.02	0.02	0.00	0.07
Vapor Retarder (1 perm)	0.00	0.00	0.00	0.00
Concrete Blocks, Pumice Aggregate	28.00	11.13	8.33	28.00
Total Water Content (kg/m²)	6.0	2.58	2.16	24.79

Results: Mineral wool insulation in a typical cavity wall will at maximum increase water content from 0.02 kg/m³ to 0.07 kg/m³. XPS had an increase in water content from 0.31 kg/m³ to 0.68 kg/m³.

Ten air changes/hour were included in this calculation.

WUFI* – Seattle, Washington Climate Zone 4 Wall with XPS [(Water Content (kg/m³))]

Layer/Material	Start of Calc.	End of Calc.	Min.	Max.
Brick (Old)	3.34	3.01	1.19	195.38
Air Layer 25 mm	1.88	2.44	.044	24.27
Extruded Polystyrene	0.31	.033	0.12	0.68
Vapor Retarder (1 perm)	0.00	0.00	0.00	0.00
Concrete Blocks, Pumice Aggregate	28.00	10.85	8.17	28.00
Total Water Content (kg/m²)	6.03	2.58	2.13	24.89

*WUFI is the acronym for "Wärme – und Feuchttransport instationär" ("Transient Heat and Moisture Transport"). WUFI is designed to calculate the simultaneous heat and moisture transport in multi-layered building components.

Double Vapor Barriers can Lead to Moisture Problems

Building enclosures see vapor transport and air movement through the assembly. Although both should be mitigated when designing, air transport will carry higher moisture levels, which could lead to significant moisture problems.

Vapor barriers (retarders) are typically required on the warm side of the assembly (i.e. the interior side for colder climates). As such, the permeability of the insulating materials and the exterior weather resistive barrier/air barrier is critical to avoid the use of double vapor barriers and ensure the wall assembly is able to dry out appropriately.

Vapor Permeability


CAVITYROCK® and COMFORTBATT® are water repellent, yet vapor permeable insulation (30-40 perms) and will allow transient vapors to pass through without restriction. This vapor permeable quality of ROCKWOOL's cavity wall insulation allows for an increased potential for drying without trapping water in the wall assembly.

Lower-permeability insulations such as spray foam or XPS can function as vapor retarders and may affect drying potential of typical building assemblies if not designed appropriately.


The stone wool insulation in a cavity wall assembly does not wick water, which means that any bulk water that contacts the outer surface will drain and not be absorbed into the body of the insulation.

Long-Term Performance

WUFI* – Moisture Content within BEDR Wall over 3 Years in Climate Zone 1

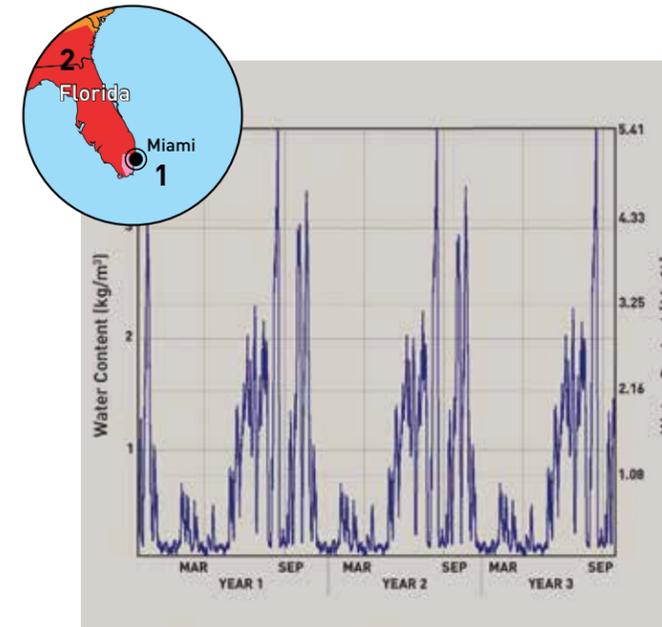

WUFI* – Moisture Content within BEDR Wall over 3 Years in Climate Zone 4

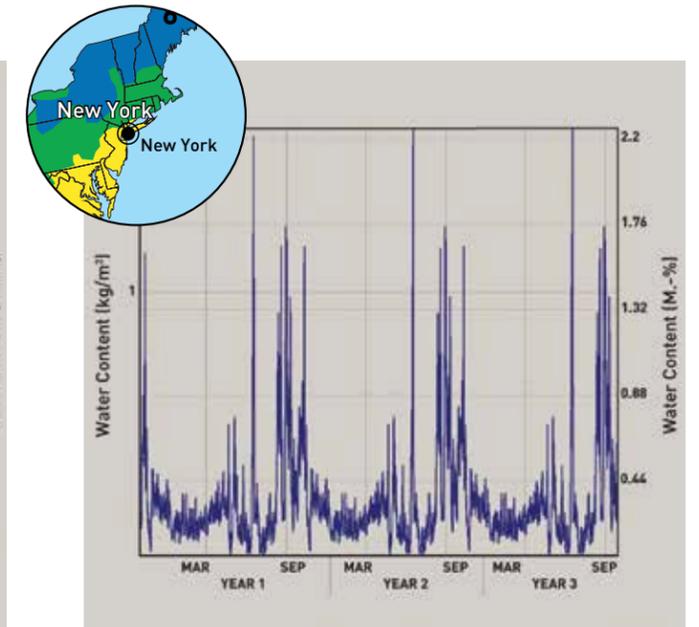

Graphs indicate the moisture performance of CAVITYROCK® over a 3-year timeframe.

CAVITYROCK® dries out year over year to the same levels, indicating that moisture does not build up in the insulation over time.

BEDR Wall Layer/Material CLIMATE ZONE 1	Start of Calc.	End of Calc.	Min.	Max.
Cement Board	43.71	197.46	16.46	349.35
Air Layer (25 mm)	1.88	13.97	0.45	26.14
ROCKWOOL CAVITYROCK®	0.20	2.19	0.05	3.89
Vapor Retarder (10 perm)	0.00	0.00	0.00	0.00
Gypsum Board (USA)	6.19	4.32	2.74	6.19
ROCKWOOL COMFORTBATT®	0.07	0.04	0.02	0.07
Interior Gypsum Board	8.65	5.24	3.45	8.65
Total Water Content*	0.79	3.05	0.3	5.19

*Water content (kg/m³)

BEDR Wall Layer/Material CLIMATE ZONE 4	Start of Calc.	End of Calc.	Min.	Max.
Cement Board	43.71	144.77	13.08	348.58
Air Layer (25 mm)	1.88	9.46	0.34	17.99
ROCKWOOL CAVITYROCK®	0.20	0.46	0.04	1.60
Vapor Retarder (10 perm)	0.00	0.00	0.00	0.01
Gypsum Board (USA)	6.19	6.18	2.44	11.79
ROCKWOOL COMFORTBATT®	0.07	0.06	0.01	1.41
Vapor Retarder (0.1 perm)	0.00	0.00	0.00	0.00
Interior Gypsum Board	8.65	4.99	3.56	8.65
Total Water Content*	0.79	2.21	0.28	4.86

*Water content (kg/m³)

ROCKWOOL CAVITYROCK® thermal insulation has a very low moisture vapor sorption and does not permit the horizontal transmission of bulk moisture through the material or the assembly.



At the ROCKWOOL Group, we are committed to enriching the lives of everyone who comes into contact with our solutions. Our expertise is perfectly suited to tackle many of today's biggest sustainability and development challenges, from energy consumption and noise pollution to fire resilience, water scarcity and flooding. Our range of products reflects the diversity of the world's needs, while supporting our stakeholders in reducing their own carbon footprint.

Stone wool is a versatile material and forms the basis of all our businesses. With more than 11,000 employees in 39 countries, we are the world leader in stone wool solutions, from building insulation to acoustic ceilings, external cladding systems to horticultural solutions, engineered fibres for industrial use to insulation for the process industry and marine and offshore.

AFB®, CAVITYROCK®, COMFORTBATT®, CONROCK®, CURTAINROCK®, ROCKBOARD®, TOPROCK®, MONOBOARD®, ROXUL® are registered trademarks of the ROCKWOOL Group in USA and ROXUL Inc. in Canada.

ROCKWOOL™, COMFORTBOARD™, FABROCK™, ROXUL SAFE™, ROCKWOOL PLUS™, and AFB evo™ are trademarks of the ROCKWOOL Group in USA and ROXUL Inc. in Canada.

SAFE'n'SOUND® is a registered trademark used under license by Masonite Inc.

Publication date - edition: 01/2018



ROCKWOOL
8024 Esquesing Line
Milton, ON L9T 6W3
Tel: 1 800 265 6878
rockwool.com

Return to Commercial Applications



CAVITYROCK®

Exterior Insulation for Cavity Wall and Rainscreen Applications



Thermal Performance

The use of CAVITYROCK® as a continuous insulation helps you meet building code requirements.



ROCKWOOL CAVITYROCK® products are semi-rigid stone wool insulation boards designed for exterior cavity wall and rainscreen applications, and are compatible with numerous cladding attachment systems.

CAVITYROCK® is non-combustible and fire resistant, and will not develop toxic smoke or promote flame spread, even when directly exposed to fire. Approved for use in many NFPA 285-compliant designs, it is an important component of fire-resilient exterior wall systems when used as a continuous insulation.

CAVITYROCK® also offers long-term thermal efficiency, moisture control and acoustic performance – improving the energy efficiency and comfort of buildings.

Choose mono-density insulation in thicknesses up to 2" or dual-density in thicknesses of 2.5" to 6".

Learn more at rockwool.com

CAVITYROCK®

Exterior Insulation for Cavity Wall and Rainscreen Applications

Technical Data Sheet

Board Insulation 07210* • Board Insulation 07 21 13**
Cavity Wall Unit Masonry 04 27 23**

ROCKWOOL CAVITYROCK® is a semi-rigid, mineral wool insulation board designed for exterior cavity wall and rainscreen applications.

	Performance	Test Standard
Compliance	Mineral Fiber Block and Board Thermal Insulation - Type IVB Compliant	ASTM C612
	MEA Approval, New York City Approval	236 - 05 - M
	For information on CAN/ULC S702 compliance, contact ROCKWOOL Technical Support	
Reaction to Fire	Flame spread index = 0; Smoke developed index = 0	ASTM E84 (UL 723)
	Flame spread index = 0; Smoke developed index = 0	CAN/ULC S102
	Determination of Non Combustibility of Building Materials - Non Combustible	CAN/ULC S114
	Behaviour of materials at 750°C - Non Combustible	ASTM E136
Density (thickness: 1", 1.5") Density (thickness: 2")	Monolithic Density of 5.3 lbs/ft³ (85 kg/m³)	ASTM C303
	Monolithic Density of 4.4 lbs/ft³ (70 kg/m³)	
Density (thickness ≥ 2.5")	Dual Density - 6.2 lbs/ft³ (100 kg/m³) outer layer and 4.1 lbs/ft³ (65 kg/m³) inner layer	ASTM C303
Corrosion Resistance	Stress Corrosion Cracking Tendency of Austenitic Stainless Steel - Passed	ASTM C795
	Corrosion of Steel - Passed	ASTM C665
Thermal Resistance	R-Value / inch @ 75°F	4.3 hr.ft².F/Btu
	RSI value / 25.4 mm @ 24°C	0.75 m²K/W
Reaction to Moisture	Moisture Sorption - 0.03% by volume	ASTM C1104
	Water Vapor Transmission, Desiccant Method - 1555ng/Pa.s.m² (27 perm)	ASTM E96
	Determination of Fungi Resistance - Passed	ASTM C1338
Thickness Dimensions	1" (25.4 mm) to 4" (101.6 mm) in 1/2" increments. 5" (127 mm) and 6" (152.4 mm)	
	24" x 48" (610 mm x 1219 mm) and 16" x 48" (406 mm x 1219 mm)	
Acoustical Performance	Thickness	125 Hz 250 Hz 500 Hz 1000 Hz 2000Hz 4000 Hz NRC
	1.5"	0.19 0.55 1.03 1.06 1.02 1.01 0.9
	2"	0.26 0.71 1.14 1.09 1.04 1.03 1
	3"	0.72 0.93 0.88 0.84 0.9 0.97 0.9

Issued 01-01-18
Supersedes 08-23-17

NOTE: *Master Format 1995 Edition **Master Format 2004 Edition. As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warranty the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.



COMFORTBATT®

Thermal Batt Insulation



ROCKWOOL COMFORTBATT® is a semi-rigid stone wool batt insulation for exterior wood and steel stud applications in both new construction and renovations.

It features a unique flexible edge designed to compress as the batt is inserted then spring back, expanding the batt against the frame studs to give a complete fill. This flexibility ensures the expected R-value is achieved and maintained.


Non-combustible and fire resistant, COMFORTBATT® will not develop toxic smoke or promote flame spread, even when exposed directly to a fire. It also offers water and moisture resistance and excellent sound absorbency.

COMFORTBATT® is an effective way to improve a home's energy efficiency. It is GREENGUARD Gold Certified and contributes to a healthier indoor environment.

Learn more at rockwool.com

Easy Fit

Easily cut to achieve an optimal fit around pipes, electrical wiring boxes, ductwork and between studs and joists that are less than standard width.

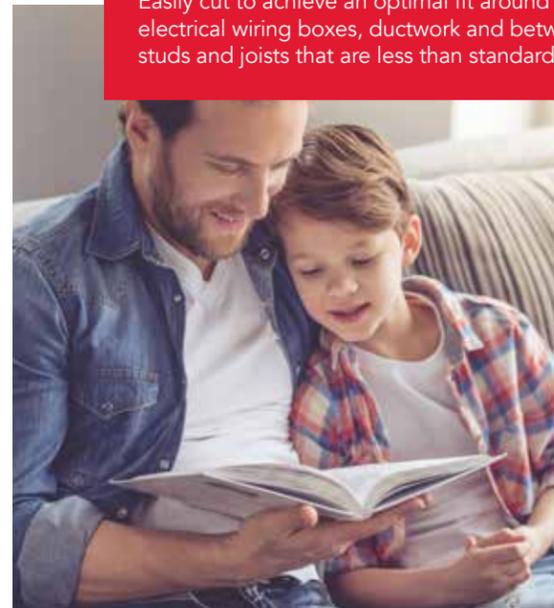

COMFORTBATT®

Thermal Batt Insulation

Technical Data Sheet

Batt Insulation 07210*
Blanket Insulation 07 21 16**

ROCKWOOL COMFORTBATT® is a mineral wool batt insulation designed for thermal resistance in wood and steel framing.

	Performance	Test Standard	
Compliance	Mineral Fibre Thermal Insulation for Buildings, Type 1 Compliant	CAN/ULC S702	
Reaction to Fire	Flame spread index = 0; Smoke developed index = 0 Determination of Non-combustibility of Building Materials - Non-combustible	CAN/ULC S102 CAN/ULC S114	
Density	> 2 lbs/ft³ (>32 kg/m³)	ASTM C167	
Thermal Resistance	Wood Stud	Steel Stud	ASTM C518
	R14 (RSI 2.47) - 3.5" thick (89 mm)	R10 (RSI 1.76) - 2.5" thick (64 mm)	
	R22 (RSI 3.87) - 5.5" thick (140 mm)	R14 (RSI 2.47) - 3.5" thick (89 mm)	
	R24 (RSI 4.23) - 5.5" thick (140 mm)	R22.5 (RSI 3.96) - 6" thick (152 mm)	
	R28 (RSI 4.93) - 7.25" thick (184 mm)	R24 (RSI 4.23) - 6" thick (152 mm)	
	R32 (RSI 5.64) - 8" thick (203 mm)		

Dimensions

Wood Stud 16" (406 mm) on centre: 15.25" x 47" (387 mm x 1194 mm)
 Wood Stud 24" (610 mm) on centre: 23" x 47" (584 mm x 1194 mm)
 Steel Stud 16" (406 mm) on centre: 16.25" x 48" (413 mm x 1219 mm)
 Steel Stud 24" (610 mm) on centre: 24.25" x 48" (616 mm x 1219 mm)



Issued 01-01-18
Supersedes 08-23-17

NOTE: *Master Format 1995 Edition **Master Format 2004 Edition. As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warrant the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.




8024 Esquesing Line, Milton, ON L9T 6W3
Tel: 800-265-6878 • Fax: 800-991-0110
rockwool.com

Return to Commercial Applications



COMFORTBOARD™ 110

High-Performance Thermal Insulated Sheathing

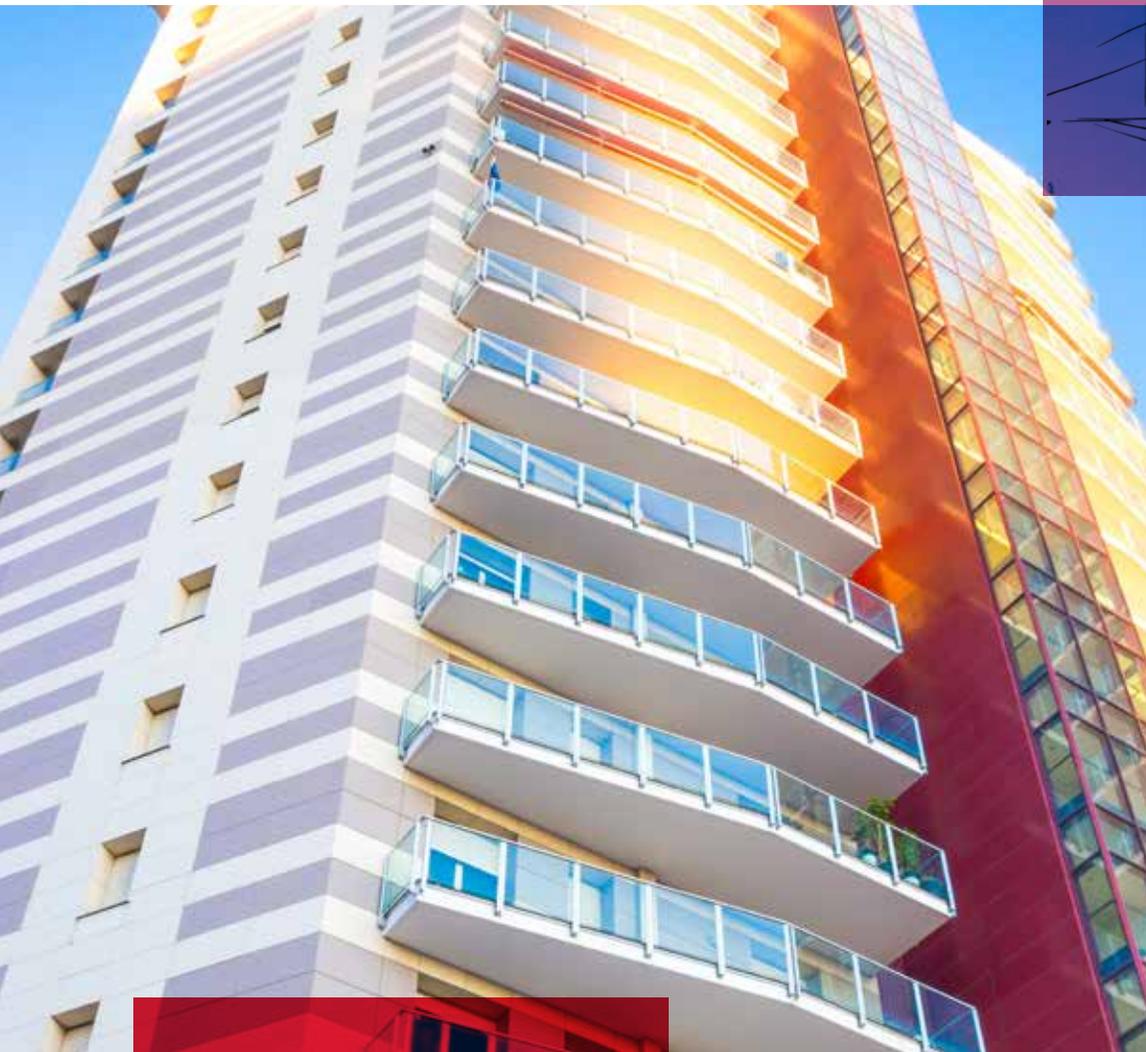



Moisture Resistance

Standard		
ASTM C1104	Moisture Sorption	0.28 %
ASTM E96	Water Vapor Transmission, Desiccant Method	2160 ng/Pa.s.m ² (35 perm)
ASTM C209	Water Absorption	1.2 %

Fire Resistant

COMFORTBOARD™ 110 is fire resistant, able to withstand temperatures up to 2150°F (1177°C), and does not produce smoke or propagate flames. This provides a critical line of defense, keeping occupants safe and reducing property damage in the event of a fire.

Fire Performance

Standard		
CAN4 S114	Test for Non-Combustibility	Non-Combustible
ASTM E84 (UL 723)	Surface Burning Characteristics	Flame Spread = 0 Smoke Developed = 0
CAN/ULC S102	Surface Burning Characteristics	Flame Spread = 0 Smoke Developed = 0

Dimensionally Stable

Metal panel cladding assemblies are subject to wide temperature changes from the exterior. This can cause shrinking and expanding in other insulation materials, resulting in gaps and significant heat loss in cold temperatures and vice versa in warm temperatures. COMFORTBOARD™ 110 remains dimensionally stable behind the assembly wall and does not expand, contract or bow with thermal cycles. This provides for a long-term, energy-efficient wall assembly.

Energy Efficient/Vapor Permeable

The trend toward energy efficiency is driving the need for high-performance building envelopes. These advanced wall systems are designed to produce higher effective R-values and minimize air leakage. This increases the need to design walls more carefully and reduce the risk of trapping moisture.

COMFORTBOARD™ 110 vapor permeable exterior insulation enables high-performance wall systems to have superior drying potential, minimizing the risk of condensation and water accumulation. The vapor permeance of ROCKWOOL insulation allows for increased drying potential without trapping transient moisture in the assembly. Foam plastic insulations have low vapor permeability and can work as vapor retarders. This may trap moisture within the wall, leading to mold or premature deterioration of building components.

ROCKWOOL COMFORTBOARD™ 110 Creates Breathable Wall Systems

ROCKWOOL COMFORTBOARD™ 110 (Thermal Insulated Sheathing) is a rigid, high-density, stone wool insulation board designed for use as an exterior continuous insulation in commercial applications.

COMFORTBOARD™ 110 is a thermally efficient, moisture resistant, vapor permeable board and takes the place of other external sheathing insulations to create high-performance wall assemblies that are effective against fire, moisture and thermal bridging, and allow for superior drying potential.

This high-density board provides the rigidity and durability needed for many exterior cladding assemblies, such as lightweight metal and composite panels systems. COMFORTBOARD™ 110 is available in standard thicknesses of 1", 1.25", 2", 2.5" and 3" with R-values ranging from R4 to R12.

A True Continuous Insulation

In commercial steel stud applications, thermal bridging plays a large part in heat loss, leading to increased energy consumption. This assembly provides a true continuous insulation, when combined with ROCKWOOL COMFORTBATT® Steel Stud insulation in the stud wall to form a high-performance, split insulation wall system. COMFORTBOARD™ 110 has superior compressive resistance and is compatible with lightweight hat channel supported cladding systems, eliminating the need for Z-furring strips which can cause thermal bridging. This allows for a reduced overall thickness of the wall system and greatly improves the energy efficiency of the building.

COMFORTBOARD™ 110 provides maximum thermal performance, fire resistance and drying potential using sustainable materials.



- ✓ Vapor Permeable
- ✓ Fire Resistant
- ✓ Environmentally Sustainable
- ✓ Moisture Resistant
- ✓ Stable Long-Term R-Value
- ✓ Dimensionally Stable
- ✓ UV Resistant
- ✓ Sound Absorbent

The ROCKWOOL BEDR™ Wall Rainscreen System is ideal for metal panel systems and comprises a high-density, rigid COMFORTBOARD™ 110 board in the external cavity, combined with ROCKWOOL thermal COMFORTBATT® insulation in the exterior stud wall cavity.

Thermal Resistance

Standard	Temperature	R-value/inch	RSI value/25.4
ASTM C518 (C177)	25°F (-4°C)	4.3 hr.ft ² .F/Btu	0.74 m ² K/W
	40°F (4°C)	4.2 hr.ft ² .F/Btu	0.72 m ² K/W
	75°F (24°C)	4.0 hr.ft ² .F/Btu	0.70 m ² K/W
	110°F (43°C)	3.6 hr.ft ² .F/Btu	0.64 m ² K/W

Compressive Strength

Standard		
ASTM C165	at 10%	1220 psf (58.5 kPa)
	at 25%	1880 psf (90.0 kPa)

Product Details

Product	Density	Standard Thickness	R-value	Standard Dimensions W x L
COMFORTBOARD™ 110	ASTM C165-00 Actual 11 lb/ft ³ , (176 kg/m ³)	1", 1.25", 2.0", 2.5", 3"	R4, R5, R8, R10, R12	24" x 48" (610 mm x 1219 mm) 48" x 72" (1219 mm x 1829 mm)



At the ROCKWOOL Group, we are committed to enriching the lives of everyone who comes into contact with our solutions. Our expertise is perfectly suited to tackle many of today's biggest sustainability and development challenges, from energy consumption and noise pollution to fire resilience, water scarcity and flooding. Our range of products reflects the diversity of the world's needs, while supporting our stakeholders in reducing their own carbon footprint.

Stone wool is a versatile material and forms the basis of all our businesses. With more than 11,000 employees in 39 countries, we are the world leader in stone wool solutions, from building insulation to acoustic ceilings, external cladding systems to horticultural solutions, engineered fibres for industrial use to insulation for the process industry and marine and offshore.

AFB®, CAVITYROCK®, COMFORTBATT®, CONROCK®, CURTAINROCK®, ROCKBOARD®, TOPROCK®, MONOBOARD®, ROXUL® are registered trademarks of the ROCKWOOL Group in USA and ROXUL Inc. in Canada.

ROCKWOOL™, COMFORTBOARD™, FABROCK™, ROXUL SAFE™, ROCKWOOL PLUS™, and AFB evo™ are trademarks of the ROCKWOOL Group in USA and ROXUL Inc. in Canada.

SAFE'n'SOUND® is a registered trademark used under license by Masonite Inc.

Publication date - edition: 01/2018




ROCKWOOL
8024 Esquesing Line
Milton, ON L9T 6W3
Tel: 1 800 265 6878
rockwool.com

Return to Commercial Applications



COMFORTBOARD™ 110

Continuous Insulation

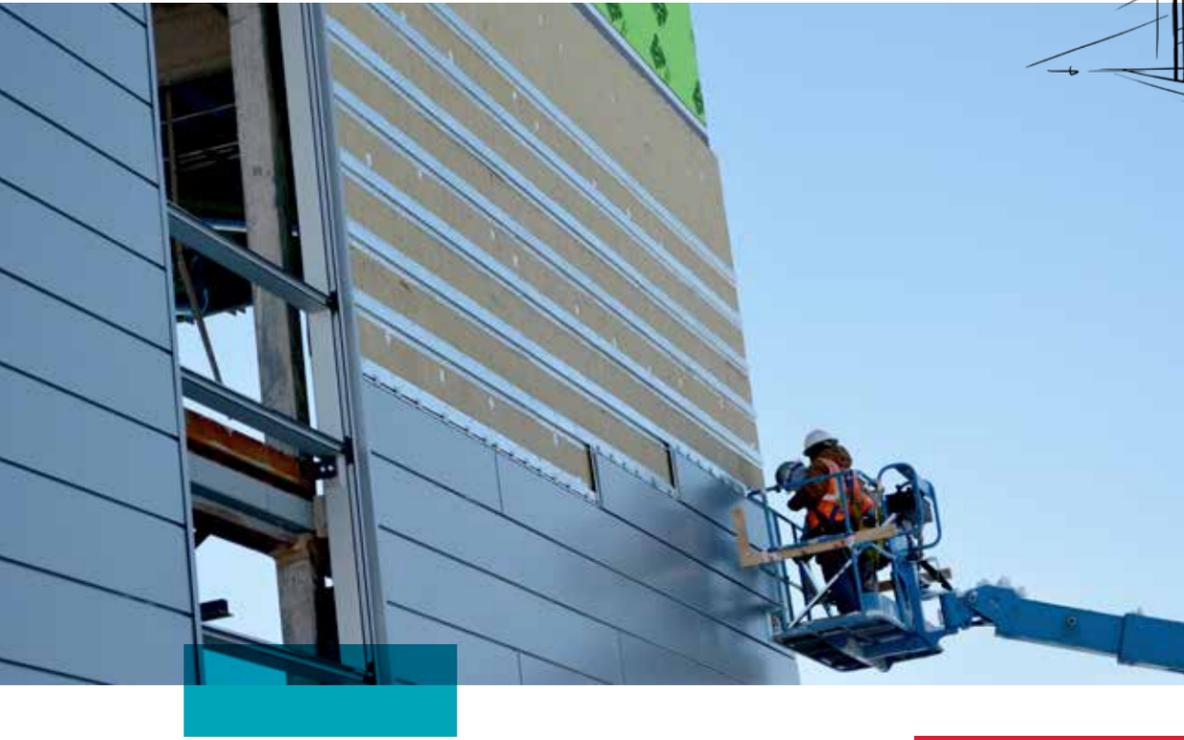

ROCKWOOL COMFORTBOARD™ 110 is a rigid, high-density, non-combustible stone wool insulation board designed for use as an exterior continuous insulation in commercial applications.

Thermally efficient, moisture resistant and vapor permeable, COMFORTBOARD™ 110 is a non-structural external sheathing insulation that creates high-performance wall assemblies to improve the energy efficiency and fire resilience of buildings.


The vapor permeance of ROCKWOOL insulation allows for increased drying potential without trapping transient moisture in the assembly, reducing the risk of mold or corrosion of building components.

COMFORTBOARD™ 110 provides the rigidity and durability needed for many exterior cladding assemblies, such as metal and composite panel systems.

Learn more at rockwool.com

Thermal Performance

Compatible with screw through supported cladding systems, COMFORTBOARD™ 110 reduces thermal bridging.

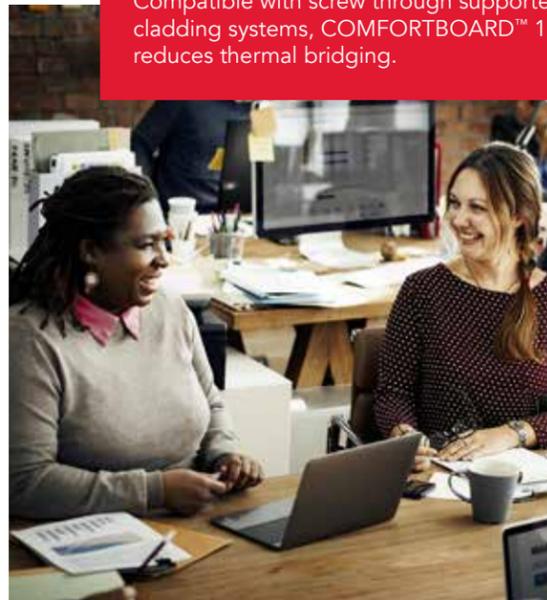

COMFORTBOARD™ 110

Continuous Insulation

Technical Data Sheet

Board Insulation 05080*
Board Insulation 07 21 13**

ROCKWOOL COMFORTBOARD™ 110 is a rigid mineral wool, non-structural insulated sheathing board used as continuous insulation in high-performance wall systems.

	Performance	Test Standard																											
Compliance	Mineral Fiber Block and Board Thermal Insulation - Type IVB Compliant Mineral Fibre Thermal Insulation for Buildings - Type 1 Compliant	ASTM C612 CAN/ULC S702																											
Reaction to Fire	Flame spread index = 0; Smoke developed index = 0 Flame spread index = 0; Smoke developed index = 0 Determination of Non Combustibility of Building Materials - Non Combustible	ASTM E84 (UL 723) CAN/ULC S102 CAN/ULC S114																											
Density	Actual Density - 11 lbs/ft ³ (176 kg/m ³)	ASTM C303																											
Corrosion Resistance	Stress Corrosion Cracking Tendency of Austenitic Stainless Steel - Passed Corrosion of Steel - Passed Corrosion to Aluminum - Passed	ASTM C795 ASTM C665 ASTM C665																											
Thermal Resistance	R-Value / inch @ 75°F 4 hr.ft ² .F/Btu RSI value / 25.4 mm @ 24°C 0.70 m ² K/W	ASTM C518 (C177)																											
Reaction to Moisture	Moisture Sorption - 0.28% Water Vapor Transmission, Desiccant Method - 2160ng/Pa.s.m ² (35 perm) Water Absorption - 1.2% Determination of Fungi Resistance - Passed	ASTM C1104 ASTM E96 ASTM C209 ASTM C1338																											
Compressive Strength	584psf (28kPa) @ 10% compression 1566psf (75kPa) @ 25% compression	ASTM C165																											
Thickness Dimensions	1" (25.4 mm), 1.25" (32 mm), 2" (50.8 mm), 2.5" (63.5 mm), 3" (76.2 mm) 24" x 48" (610 mm x 1219 mm), 48" x 72" (1219 mm x 1829 mm)																												
Acoustical Performance	<table border="1"> <thead> <tr> <th>Thickness</th> <th>125 Hz</th> <th>250 Hz</th> <th>500 Hz</th> <th>1000 Hz</th> <th>2000Hz</th> <th>4000 Hz</th> <th>NRC</th> <th>ASTM C423</th> </tr> </thead> <tbody> <tr> <td>1"</td> <td>0.13</td> <td>0.49</td> <td>0.85</td> <td>0.89</td> <td>0.89</td> <td>0.97</td> <td>0.8</td> <td></td> </tr> <tr> <td>2"</td> <td>0.5</td> <td>0.71</td> <td>0.85</td> <td>0.9</td> <td>0.96</td> <td>1.01</td> <td>0.85</td> <td></td> </tr> </tbody> </table>	Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000Hz	4000 Hz	NRC	ASTM C423	1"	0.13	0.49	0.85	0.89	0.89	0.97	0.8		2"	0.5	0.71	0.85	0.9	0.96	1.01	0.85		
Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000Hz	4000 Hz	NRC	ASTM C423																					
1"	0.13	0.49	0.85	0.89	0.89	0.97	0.8																						
2"	0.5	0.71	0.85	0.9	0.96	1.01	0.85																						

Issued 01-01-18
Supersedes 08-23-17

NOTE: *Master Format 1995 Edition **Master Format 2004 Edition. As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warranty the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.



8024 Esquesing Line, Milton, ON L9T 6W3
Tel: 800-265-6878 • Fax: 800-991-0110
rockwool.com

Return to Commercial Applications



ROCKWOOL AFB®

Acoustical Fire Batt Insulation for Commercial
& Interior Partition Wall.



Batt insulation that fights both fire and noise.

ROCKWOOL AFB®

ROCKWOOL AFB® is a lightweight, batt insulation specifically designed for steel stud interior wall and floor applications.

This stone wool insulation is made from natural stone and recycled content. It's a sustainable product that provides superior sound absorbency and fire protection for overall occupant comfort and safety. That's why AFB® is quickly becoming the insulation of choice for today's green builders in commercial and industrial construction.

AFB® – Acoustically Better

Sound Transmission Class (STC) values don't take into account Lower Frequency Sounds (LFS) which can cause vibrations between rooms, negatively affecting the sound environment. The higher density of ROCKWOOL AFB® can reduce sound transmission, helping to create a quiet and comfortable space.

Sound Control

When ROCKWOOL AFB® is specified for interior wall or floor assemblies, better overall sound control and fire protection are achieved. Compared to other types of insulation, AFB® provides increased density that effectively reduces airflow and essentially, sound transmissions. Greater noise or sound control is further achieved when thicker AFB® and gypsum board are used together. AFB® thickness ranges from 1.0" (25 mm) to 6" (152 mm).

In commercial applications, much of the sound to be controlled is in the low frequency or bass ranges. This noise includes conversation, projection/video equipment, mechanical rooms and ventilation systems. In the lower 1/3 octave bands, ROCKWOOL AFB® outperforms glass wool insulation, providing more low frequency absorption when comparing acoustical testing at low frequencies (see chart "Random Incidence Sound Absorption Coefficients, in 1/3 Octave Band", pg. 3).



Density and Airflow Resistivity for Samples of Absorptive Material

		Density (kg/m ³)		Airflow Resistivity (mks rays/m)	
		Average Value	Standard Deviation	Average Value	Standard Deviation
Glass Fiber	3½" (89 mm) batt	12.2	0.4	4,800	400
Glass Fiber	2½" (65 mm) batt	11.7	1.0	3,600	200
ROCKWOOL AFB®	3" (75 mm) batt	44.2	1.7	16,600	900

Random Incidence Sound Absorption Coefficients, in 1/3 Octave Band

		1/3 Octave Band Center Frequency (Hz)						
		65	80	100	125	160	200	250
Glass Fiber Sample 1	3½"	0.15	0.18	0.21	0.25	0.32	0.43	0.54
Glass Fiber Sample 2	3½"	0.15	0.17	0.19	0.22	0.28	0.37	0.48
ROCKWOOL AFB® Sample 1	3"	0.18	0.22	0.28	0.33	0.40	0.50	0.62
ROCKWOOL AFB® Sample 2	3"	0.18	0.23	0.29	0.24	0.41	0.52	0.65
Glass Fiber Sample Average	3"	0.15	0.18	0.20	0.20	0.30	0.40	0.50
ROCKWOOL AFB® Sample Average	3"	0.18	0.23	0.29	0.34	0.41	0.51	0.64

Acoustical Performance

ASTM E 90	Airborne Sound Transmission Loss	Tested
ASTM E 413	Rating Sound Insulation	Tested
ASTM C 423	Sound Absorption Coefficients	Tested
ASTM E 1050	Impedance and Absorption of Acoustical Materials	Tested

ASTM C423

Thickness	Coefficients at Frequencies						
	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
1.0"	0.14	0.25	0.65	0.90	1.01	1.01	0.70
1.5"	0.18	0.44	0.94	1.04	1.02	1.03	0.85
2.0"	0.28	0.60	1.09	1.09	1.05	1.07	0.95
3.0"	0.52	0.96	1.18	1.07	1.05	1.05	1.05
4.0"	0.86	1.11	1.20	1.07	1.08	1.07	1.10



Features and benefits that set AFB® apart.



Fire Resistant

ROCKWOOL AFB® is non-combustible and will not develop toxic smoke or promote flame spread, even when directly exposed to fire. AFB® will therefore not add fuel to an existing fire, making it ideal for use in high occupancy buildings. Studies have shown that mineral wool insulated rooms provide a 54% increase in overall fire resistance rating compared to non-insulated rooms. Since stone wool does not contribute to a fire, it can provide valuable extra time for people to reach safety, a critical factor especially in health and education facilities. It can also provide fire services personnel additional time to control the spread of fire while reducing property damage.

Water Repellent

ROCKWOOL AFB® will not absorb or hold water and will not promote mold or fungi growth. It has superior drying potential, effectively managing moisture in the event that it does get into the wall or floor, allowing it to dry out and maintain its sound and fire properties.



Sag-Free, Tight Fit

The higher density of AFB® provides superior sag resistance and fit. AFB® holds its shape without sagging or slumping in the wall cavity over time to consistently provide continuous fire protection and sound control.



Fast, Easy Installation

Working with ROCKWOOL insulation is a breeze. Simply cut with a serrated knife for quick and efficient installation between studs, around electrical boxes, pipes, wiring, ductwork and between studs and joists that are less than a standard width.

Fire Performance

CAN4 S114	Test for Non-Combustibility	Non-Combustible
ASTM E 136	Behavior of Materials at 750 °C (1382 °F)	Non-Combustible
CAN/ULC S102	Surface Burning Characteristics	Flame Spread = 0 Smoke Developed = 0
ASTM E84 (UL 723)	Surface Burning Characteristics	Flame Spread = 0 Smoke Developed = 0
CAN/ULC S129	Smolder Resistance	0.09%

Corrosive Resistance

ASTM C 665	Corrosiveness to Steel	Pass
ASTM C 795 ****	Stainless Steel Stress Corrosion Specification as per Test Methods C871 and C692: U.S. Nuclear Regulatory Commission, Reg. Guide #1.36: U.S. Military Specifications MIL-I-24244 (all versions including B and C)	Conforms

Air Erosion

UL 181	Maximum Air Velocity	1000 fpm (5.08 m/s)
--------	----------------------	---------------------



Compliance and performance.

CAN/ULC-S702-07	Mineral Fiber Thermal Insulation for Buildings	Type 1, Complies
ASTM C 665	Mineral Fiber Blanket Thermal Insulation	Type 1, Complies
ASTM C 553	Mineral Fiber Blanket Thermal Insulation	Complies
MEA Approval	New York City Approval	338-97-M
City Of Los Angeles approval		RR 25444
ULC Design Nos.	U311, W406, W408, W419, W423, W440, W441, W442, W508, W600, Z500	
UL Design Nos.	U305, U311, U317, U411, U412, U448, U465, V417, V418, V419	

Dimensions

16.25" (width) x 48" (length)
412.75 mm (width) x 1219 mm (length)
24.25" (width) x 48" (length)
615.95 mm (width) x 1219 mm (length)

Thickness

Product thickness is available in 1" to 3.5" with 1/2" increments as well as 4", 5" and 6" offerings.

Density

2" thickness	2.8 lbs/ft ³	45 kg/m ³
--------------	-------------------------	----------------------



Commercial wall system performance using ROCKWOOL AFB®.


In the following 13 commercial wall systems, ROCKWOOL AFB® delivers excellent fire resistance ratings and Sound Transmission Class (STC).

The right-hand column shows the results of acoustical tests done on these ROCKWOOL AFB® wall systems at the internationally-recognized Riverbank Acoustical Laboratories.

For other wall constructions not shown here, please contact ROCKWOOL technical services.

For further details on the illustrated constructions, consult the UL or ULC Design Manual. All STC Ratings are based on Type X gypsum board.

Construction

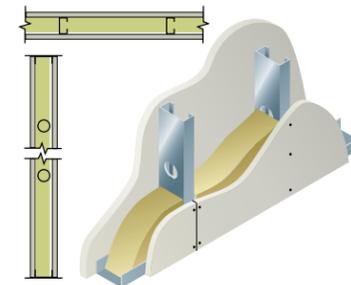

Description

Single layer wall

5/8" (15.9 mm) gypsum board
 3 5/8" (92 mm) steel studs spaced
 24" (610 mm) centers
 3" (76 mm) ROCKWOOL AFB®


Sound Transmission Class

52 (RAL-TL95-195)

Fire Resistance

1 hour (UL design no. V417 and U465)
 1 hour (ULC W447)


Transmission Loss

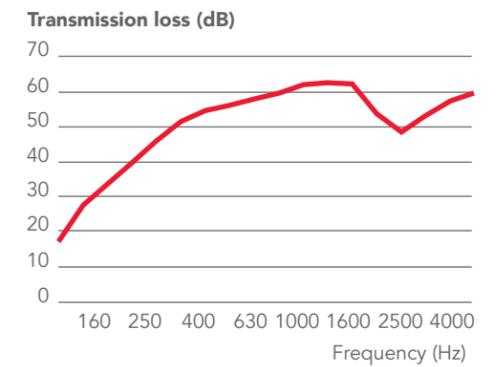

What is STC?

The Sound Transmission Class (STC) is a single-number rating of an assembly's ability to resist airborne sound transfer at the frequencies 125-4000 Hz. In general, a higher STC rating blocks more noise from transmitting through a partition.

Construction

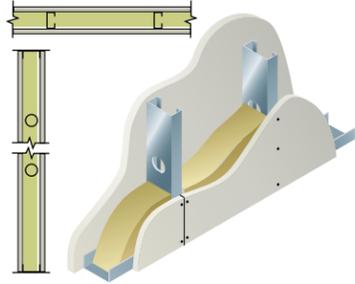

Description

Single layer wall

1/2" (12.7 mm) gypsum board
3 5/8" (92 mm) steel studs spaced
24" (610 mm) centers

3" (76 mm) ROCKWOOL AFB®


Sound Transmission Class

51 (RAL-TL96-269)


Fire Resistance

1 hour (UL design no. U448 and
ULC design no W433)

Transmission Loss

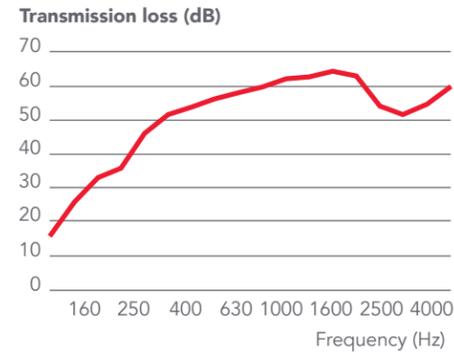

Construction

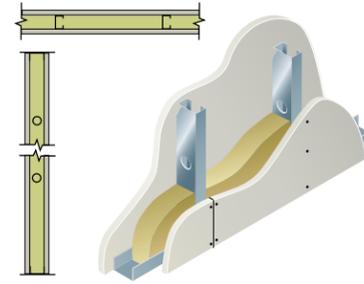

Description

Single layer wall

1/2" (12.7 mm) gypsum board
2 1/2" (64 mm) steel studs spaced
24" (610 mm) centers

2 1/2" (64 mm) ROCKWOOL AFB®



Sound Transmission Class

44 (RAL-TL96-285)

Fire Resistance

1 hour (UL design no. U448 and
ULC design no W433)

Transmission Loss

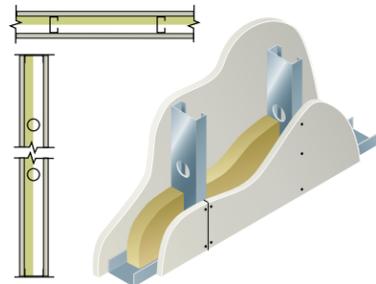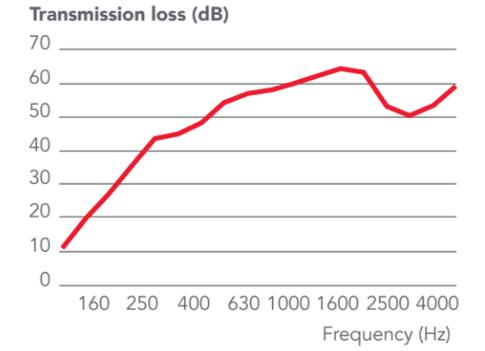

Single layer wall

1/2" (12.7 mm) gypsum board
3 5/8" (92 mm) steel studs spaced
24" (610 mm) centers



1 1/2" (38 mm) ROCKWOOL AFB®

Sound Transmission Class

46 (RAL-TL90-195)

Fire Resistance

1 hour (UL design no. U448 and
ULC design no W433)

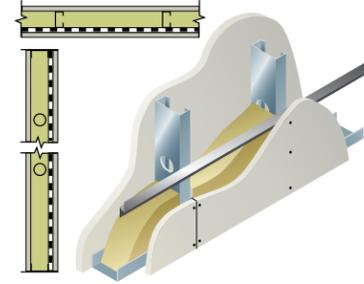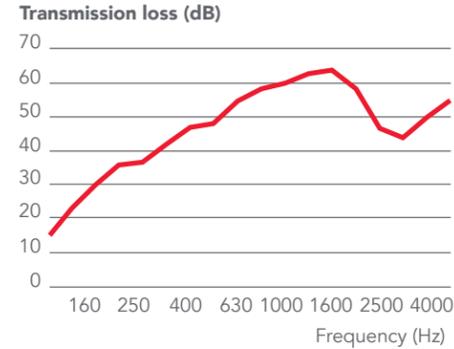

Single layer wall with resilient metal channels on one side

5/8" (15.9 mm) gypsum board
3 5/8" (92 mm) steel studs spaced
24" (610 mm) centers

Resilient metal channels spaced
horizontally at 24" (610 mm) centers



3" (76 mm) ROCKWOOL AFB®

Sound Transmission Class

55 (RAL-TL96-289)

Fire Resistance

1 hour (UL design no. V417 and U465)
1 hour (ULC W447)

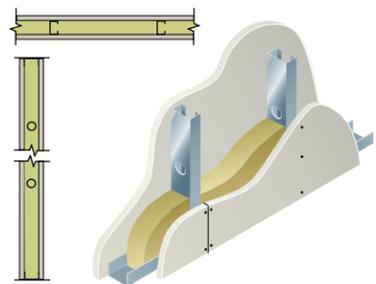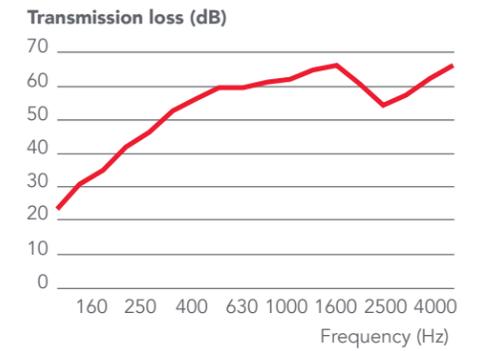

Single layer wall

5/8" (15.9 mm) gypsum board
2 1/2" (64 mm) steel studs spaced
24" (610 mm) centers


2 1/2" (64 mm) ROCKWOOL AFB®

Sound Transmission Class

46 (RAL-TL96-270)

Fire Resistance

1 hour (NBC of Canada 1995
and UL design no. U448)

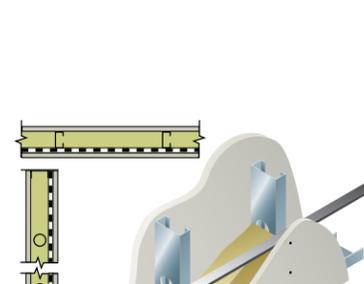

Single layer wall with resilient metal channels on one side

1/2" (12.7 mm) gypsum board
3 5/8" (92 mm) steel studs spaced
24" (610 mm) centers

Resilient metal channels spaced
horizontally at 24" (610 mm) centers


3" (76 mm) ROCKWOOL AFB®

Sound Transmission Class


53 (RAL-TL96-288)

Fire Resistance

1 hour (UL design no. U448)

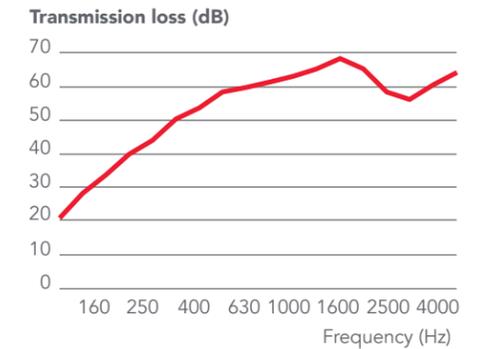

Construction

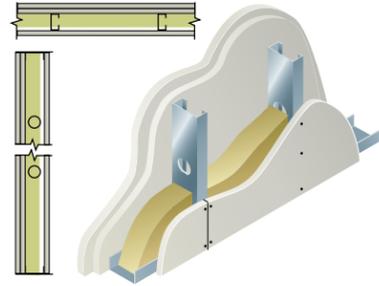

Description

Unbalanced wall

5/8" (15.9 mm) gypsum board, single layer one side; double layer other

3 5/8" (92 mm) steel studs spaced 24" (610 mm) centers

3" (76 mm) ROCKWOOL AFB®/ 3 1/2" (89 mm) AFB®

Sound Transmission Class

56 (RAL-TL96-264)

Fire Resistance

1 1/2 hour (NBC of Canada 1995)*


1 hour (UL design no. V417)

*NB. 3 1/2" (89 mm) AFB® only

Transmission Loss



Construction

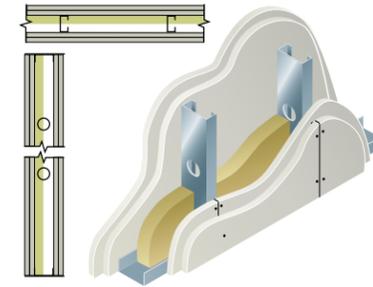

Description

Double layer wall

2 layers of 1/2" (12.7 mm) gypsum board on both sides

3 1/2" (92 mm) steel studs spaced 24" (610 mm) centers

1 1/2" (38 mm) ROCKWOOL AFB®



Sound Transmission Class

56 (RAL-TL90-196)

Fire Resistance

2 hours (UL design no. U412 and V418)

Transmission Loss

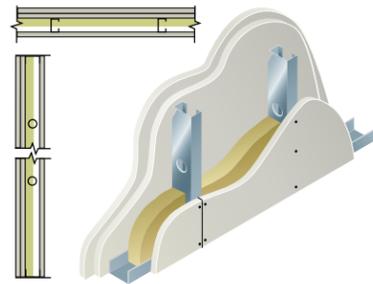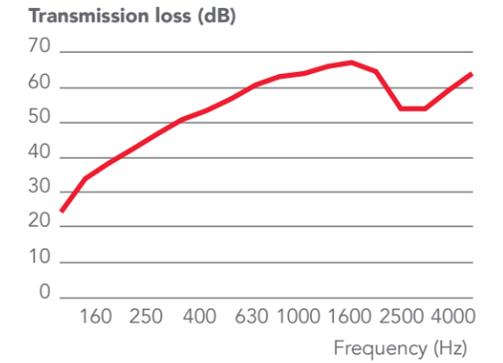

Unbalanced wall

1/2" (12.7 mm) gypsum board, single layer one side; double layer other

2 1/2" (64 mm) steel studs spaced 24" (610 mm) centers

1 1/2" (38 mm) ROCKWOOL AFB®


Sound Transmission Class

50 (RAL-TL90-186)

Fire Resistance

1 hour (NBC of Canada 1995

and UL design no. U448)

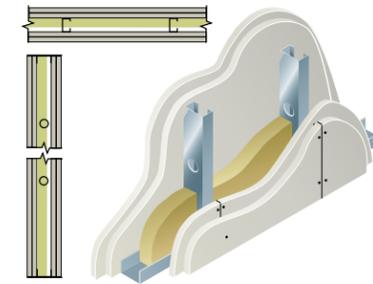

Double layer wall

2 layers of 5/8" (15.9 mm) gypsum board on both sides

2 1/2" (64 mm) steel studs spaced 24" (610 mm) centers



1 1/2" (38 mm) ROCKWOOL AFB®

Sound Transmission Class

56 (RAL-TL90-193)

Fire Resistance

2 hours (UL design no. U411 and V419, NBC of Canada)

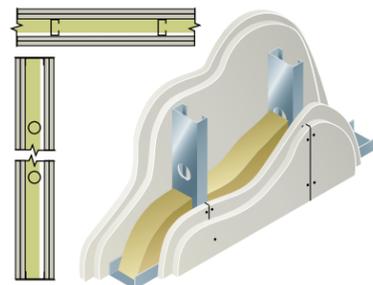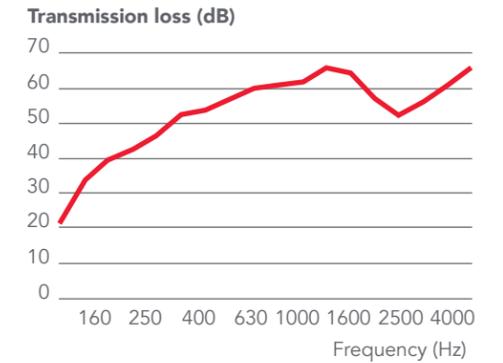

Double layer wall

2 layers of 5/8" (15.9 mm) gypsum board on both sides

3 5/8" (92 mm) steel studs spaced 24" (610 mm) centers



3" (76 mm) ROCKWOOL AFB®

Sound Transmission Class

57 (RAL-TL96-268)

Fire Resistance

2 hours (UL design no. U411 and V419, NBC of Canada 1995)

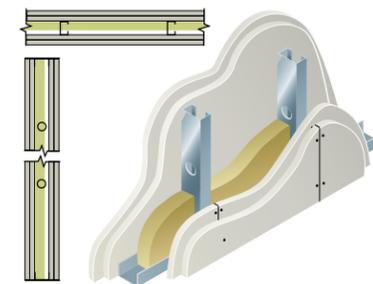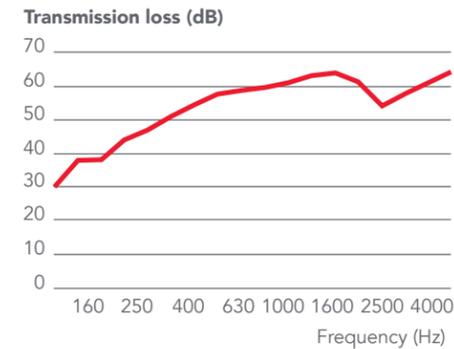

Double layer wall

2 layers of 1/2" (12.7 mm) gypsum board on both sides

2 1/2" (64 mm) steel studs spaced 24" (610 mm) centers


1 1/2" (38 mm) ROCKWOOL AFB®

Sound Transmission Class

53 (RAL-TL90-185)

Fire Resistance

2 hours (UL design no. U412 and V418)

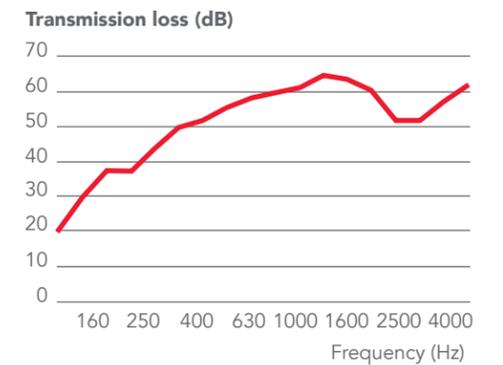

At the ROCKWOOL Group, we are committed to enriching the lives of everyone who comes into contact with our solutions. Our expertise is perfectly suited to tackle many of today's biggest sustainability and development challenges, from energy consumption and noise pollution to fire resilience, water scarcity and flooding. Our range of products reflects the diversity of the world's needs, while supporting our stakeholders in reducing their own carbon footprint.

Stone wool is a versatile material and forms the basis of all our businesses. With more than 11,000 employees in 39 countries, we are the world leader in stone wool solutions, from building insulation to acoustic ceilings, external cladding systems to horticultural solutions, engineered fibres for industrial use to insulation for the process industry and marine and offshore.

AFB®, CAVITYROCK®, COMFORTBATT®, CONROCK®, CURTAINROCK®, ROCKBOARD®, TOPROCK®, MONOBOARD®, ROXUL® are registered trademarks of the ROCKWOOL Group in USA and ROXUL Inc. in Canada.

ROCKWOOL™, COMFORTBOARD™, FABROCK™, ROXUL SAFE™, ROCKWOOL PLUS™, and AFB evo™ are trademarks of the ROCKWOOL Group in USA and ROXUL Inc. in Canada.

SAFE'n'SOUND® is a registered trademark used under license by Masonite Inc.

Publication date - edition: 01/2018



ROCKWOOL
8024 Esquesing Line
Milton, ON L9T 6W3
Tel: 1 800 265 6878
rockwool.com

Return to Commercial Applications



AFB®

Acoustical Fire Batt Insulation



ROCKWOOL AFB® is a lightweight, acoustical fire batt stone wool insulation specifically designed for steel stud interior wall and floor applications. Its superior sound absorbency and fire protection contribute to the overall comfort and safety of occupants.

It provides increased density that reduces sound transmission. Greater noise control is further achieved when AFB® is part of the wall assembly along with gypsum boards and resilient channels.

AFB® is non-combustible and will not develop toxic smoke or promote flame spread, even when directly exposed to fire. This helps to provide valuable extra time for people to reach safety and for fire services personnel to control the spread. It is a key component of fire-rated partitions.

AFB® comes in a number of thicknesses to meet the requirements of both retrofit and new construction applications.

Learn more at rockwool.com

Quiet Spaces

The higher density of ROCKWOOL AFB® can reduce sound transmission, helping to create a quiet and comfortable space.



AFB®

Acoustical Fire Batt Insulation

Technical Data Sheet

Batt Insulation 07210 & 09820* • Blanket Insulation 07 21 16**
Acoustical Blanket Insulation 09 81 16**

ROCKWOOL AFB® is a mineral wool batt insulation for interior partitions in commercial constructions where superior fire resistance and acoustical performance are required.

	Performance	Test Standard							
Compliance	Mineral Fiber Thermal Insulation for Buildings, Type 1 Compliant	CAN/ULC S702							
	Mineral Fiber Blanket Thermal Insulation, Type 1 Compliant	ASTM C665							
	Mineral Fiber Blanket Thermal Insulation, Type 7 Compliant	ASTM C553							
	MEA Approval, New York City Approval	338-97-M							
	City of Los Angeles Approval	RR 25444							
Reaction to Fire	Flame spread index = 0; Smoke developed index = 0	ASTM E84 (UL 723)							
	Flame spread index = 0; Smoke developed index = 0	CAN/ULC S102							
	Determination of Non-combustibility of Building Materials - Non-combustible	CAN/ULC S114							
	Behavior of materials at 750°C - Non-combustible	ASTM E136							
	Smolder Resistance - 0.09%	CAN/ULC S129							
Density	Actual Density at thicknesses ≥ 3" (76.2 mm) - 2.5 lbs/ft³ (40 kg/m³)	ASTM C303							
	Actual Density at thicknesses < 3" (76.2 mm) - 2.8 lbs/ft³ (45 kg/m³)								
Corrosion Resistance	Stress Corrosion Cracking Tendency of Austenitic Stainless Steel - Passed	ASTM C795							
	Corrosion of Steel - Passed	ASTM C665							
Air Erosion	Maximum Air Velocity - 1000 fpm (5.08 m/s)	UL 181							
Thickness Dimensions	1" through 4" (25.4 mm - 101.6 mm) in 1/2" increments as well as 5" (127 mm) and 6" (152.4 mm)	ASTM C423							
	16" x 48" (413 mm x 1219 mm), 24" x 48" (610 mm x 1219 mm)								
Acoustical Performance	Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000Hz	4000 Hz	NRC	ASTM C423
	1.0"	0.14	0.25	0.65	0.9	1.01	1.01	0.7	
	1.5"	0.18	0.44	0.94	1.04	1.02	1.03	0.85	
	2"	0.28	0.6	1.09	1.09	1.05	1.07	0.95	
	3"	0.52	0.96	1.18	1.07	1.05	1.05	1.05	
4"	0.86	1.11	1.2	1.07	1.08	1.07	1.1		
	Please contact ROCKWOOL for STC ratings on tested wall assemblies								ASTM E90
Fire Rated Designs	ULC Classification Code: BZJZC								
	UL Classification Code: BZJZ								



Issued 01-01-18
Supersedes 08-23-17

NOTE: *Master Format 1995 Edition **Master Format 2004 Edition. As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warranty the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.




8024 Esquesing Line, Milton, ON L9T 6W3
Tel: 800-265-6878 • Fax: 800-991-0110
rockwool.com

Return to Commercial Applications




AFB evo™

Acoustical Fire Batt Insulation

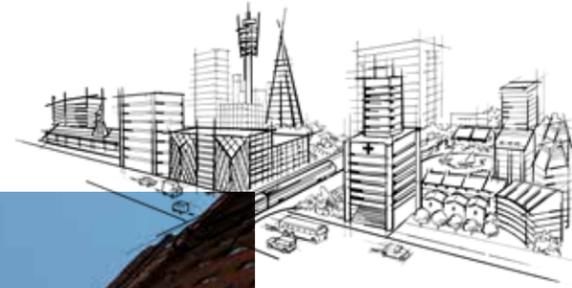

Greener Building

ROCKWOOL AFB evo™ is UL validated to be Formaldehyde Free and LBC compliant with the Declare Product Transparency Label Database.

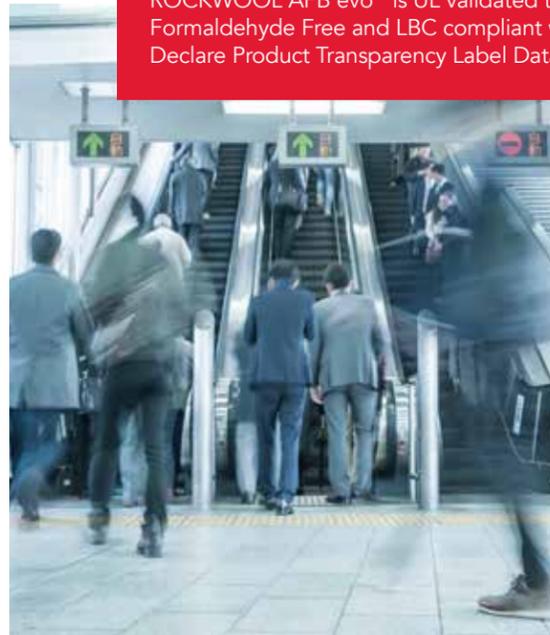

ROCKWOOL AFB evo™ is a lightweight, acoustical fire batt stone wool insulation for steel stud interior wall and floor applications. This no added formaldehyde insulation provides superior sound absorbency and fire protection that contribute to the overall comfort and safety of occupants.

It provides increased density that reduces sound transmission. Greater noise control is further achieved when AFB® is part of the wall assembly along with gypsum boards and resilient channels.

AFB evo™ is non-combustible and will not develop toxic smoke or promote flame spread, even when directly exposed to fire. This helps to provide valuable extra time for people to reach safety and for fire services personnel to control the spread. It is a key component of fire-rated partitions.

AFB evo™ comes in a number of thicknesses to meet the requirements of both retrofit and new construction applications.

Learn more at rockwool.com



AFB evo™

Acoustical Fire Batt Insulation

Technical Data Sheet

Batt Insulation 07210 & 09820* • Blanket Insulation 07 21 16**
Acoustical Blanket Insulation 09 81 16**

ROCKWOOL AFB evo™ is a no added formaldehyde stone wool batt insulation for interior partitions in commercial constructions where superior fire resistance and acoustical performance is required. ROCKWOOL AFB evo™ is UL validated to be Formaldehyde Free.

	Performance	Test Standard																																																
Compliance	Mineral Fiber Thermal Insulation for Buildings, Type 1 Compliant Mineral Fiber Blanket Thermal Insulation, Type 1 Compliant	CAN/ULC S702 ASTM C665																																																
Reaction to Fire	Flame spread index = 0; Smoke developed index = 0 Flame spread index = 0; Smoke developed index = 0 Determination of Non-combustibility of Building Materials - Non-combustible Behavior of materials at 750°C - Non-combustible	ASTM E84 (UL 723) CAN/ULC S102 CAN/ULC S114 ASTM E136																																																
Density	Actual Density at thicknesses ≥ 3" (76.2 mm) - 2.5 lbs/ft³ (40 kg/m³) Actual Density at thicknesses < 3" (76.2 mm) - 2.8 lbs/ft³ (45 kg/m³)	ASTM C303																																																
Corrosion Resistance	Corrosion of Steel - Passed	ASTM C665																																																
Thickness Dimensions	1" through 4" (25.4 mm - 101.6 mm) in 1/2" increments as well as 5" (127 mm) and 6" (152.4 mm) 16" x 48" (413 mm x 1219 mm), 24" x 48" (610 mm x 1219 mm)																																																	
Acoustical Performance	<table border="1"> <thead> <tr> <th>Thickness</th> <th>125 Hz</th> <th>250 Hz</th> <th>500 Hz</th> <th>1000 Hz</th> <th>2000Hz</th> <th>4000 Hz</th> <th>NRC</th> </tr> </thead> <tbody> <tr> <td>1.0"</td> <td>0.14</td> <td>0.25</td> <td>0.65</td> <td>0.9</td> <td>1.01</td> <td>1.01</td> <td>0.7</td> </tr> <tr> <td>1.5"</td> <td>0.18</td> <td>0.44</td> <td>0.94</td> <td>1.04</td> <td>1.02</td> <td>1.03</td> <td>0.85</td> </tr> <tr> <td>2"</td> <td>0.28</td> <td>0.6</td> <td>1.09</td> <td>1.09</td> <td>1.05</td> <td>1.07</td> <td>0.95</td> </tr> <tr> <td>3"</td> <td>0.52</td> <td>0.96</td> <td>1.18</td> <td>1.07</td> <td>1.05</td> <td>1.05</td> <td>1.05</td> </tr> <tr> <td>4"</td> <td>0.86</td> <td>1.11</td> <td>1.2</td> <td>1.07</td> <td>1.08</td> <td>1.07</td> <td>1.1</td> </tr> </tbody> </table>	Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000Hz	4000 Hz	NRC	1.0"	0.14	0.25	0.65	0.9	1.01	1.01	0.7	1.5"	0.18	0.44	0.94	1.04	1.02	1.03	0.85	2"	0.28	0.6	1.09	1.09	1.05	1.07	0.95	3"	0.52	0.96	1.18	1.07	1.05	1.05	1.05	4"	0.86	1.11	1.2	1.07	1.08	1.07	1.1	ASTM C423
Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000Hz	4000 Hz	NRC																																											
1.0"	0.14	0.25	0.65	0.9	1.01	1.01	0.7																																											
1.5"	0.18	0.44	0.94	1.04	1.02	1.03	0.85																																											
2"	0.28	0.6	1.09	1.09	1.05	1.07	0.95																																											
3"	0.52	0.96	1.18	1.07	1.05	1.05	1.05																																											
4"	0.86	1.11	1.2	1.07	1.08	1.07	1.1																																											
Fire Rated Designs	ULC Classification Code: BZJZC UL Classification Code: BZJZ	ASTM E90																																																

Issued 01-01-18
Supersedes 08-23-17



NOTE: *Master Format 1995 Edition **Master Format 2004 Edition. As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warranty the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.



CURTAINROCK® and ROXUL SAFE™

Insulation for Curtain Wall Systems



Superior Protection and Performance in a Curtain Wall System

- ✓ Fire Resistant
- ✓ Long-Term Stable R-Value
- ✓ Sound Absorbent
- ✓ Water Repellent
- ✓ Environmentally Sustainable



Components: Concrete Floor Slab, ROXUL SAFE™, Fire sealant, Mullion cover – CURTAINROCK®, Transom, Stiffeners, Spandrel panel.

ROXUL SAFE™

ROXUL SAFE™ is a lightweight, semi-rigid stone wool insulation that provides fire-stopping and acoustical properties. It is designed to fill perimeter gaps between concrete floor slabs and exterior wall systems, between firewalls and ceiling slabs, and around conduit pipes and duct openings through walls and floor slabs.

It is non-combustible and fire resistant, and will not develop toxic smoke or promote flame spread, even when exposed directly to a fire. When ROXUL SAFE™ is used with CURTAINROCK® 40/80, it provides a comprehensive fire-stopping system that has been UL/ULC/Intertek tested and approved for perimeter fire containment systems.

ROXUL SAFE™ is always used in conjunction with a fire sealant to prevent passage of fire and smoke from one floor to the next.

CURTAINROCK®


CURTAINROCK® is a lightweight, semi-rigid stone wool insulation board designed for curtain wall systems. ROCKWOOL offers CURTAINROCK®, CURTAINROCK® 40, and CURTAINROCK® 80 to meet a wide variety of curtain wall specifications.

Fire Resistance

CURTAINROCK® is non-combustible and fire-resistant, and will not develop smoke or promote flame spread when exposed to fire, providing a critical line of defense in fire protection.

ROCKWOOL stone wool products have an extremely high melting point of 2150 °F (1177 °C). When used in combination with ROXUL SAFE™, CURTAINROCK® 40 and CURTAINROCK® 80 provide a comprehensive fire-stopping system that has been UL/ULC/Intertek tested and approved for perimeter fire containment systems.

Temperature Development in a Standard Fire (ASTM E119)

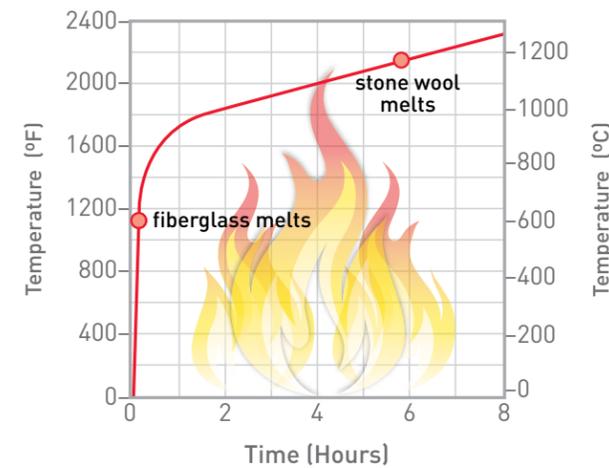

Designed by James K. M. Cheng Architects Inc., the visually stunning Living Shangri-La hotel, located on the Vancouver waterfront, was built using CURTAINROCK® and ROXUL SAFE™ products as its specified insulation.

Product Specifications

Product	Dimensions W x L	Thickness						
		1"	1.5"	2"	3"	4"	5"	6"
CURTAINROCK®*	24" x 48" (610 mm x 1219 mm)	✓	✓	✓	✓	✓	✓	✓
	24" x 60" (610 mm x 1524 mm)			✓				
CURTAINROCK® 40	24" x 48" (610 mm x 1219 mm)			✓	✓	✓	✓	
	24" x 60" (610 mm x 1524 mm)					✓		
	36" x 60" (914 mm x 1524 mm)			✓	✓	✓		
CURTAINROCK® 80	48" x 72" (1219 mm x 1829 mm)					✓	✓	
	24" x 48" (610 mm x 1219 mm)	✓		✓	✓	✓		
	36" x 60" (914 mm x 1524 mm)			✓	✓	✓		
ROXUL SAFE™	48" x 72" (1219 mm x 1829 mm)			✓	✓	✓		
	24" x 48" (610 mm x 1219 mm)			✓	✓	✓		

Fire Performance

Product	Specification	Test	Result
ROXUL SAFE™, CURTAINROCK® CURTAINROCK® 40/80	ASTM E136	Behaviour of Materials at 750 °C (1382 °F)	Non-Combustible
ROXUL SAFE™, CURTAINROCK® CURTAINROCK® 40/80	CAN4 S114	Test for Non-Combustibility	Non-Combustible
ROXUL SAFE™, CURTAINROCK® CURTAINROCK® 40/80	ASTM E 84(UL 723) and CAN/ULC S102	Surface Burning Characteristics	Flame Spread = 0 Smoke Developed = 0
CURTAINROCK® 40/80	ASTM E2307/E119	Perimeter Fire Barrier Systems	Complies
ROXUL SAFE™	CAN4 S115M	Standard Test Method/Fire Stop Systems	Complies
ROXUL SAFE™	CAN/ULC-S129	Smoulder Resistance	0.01%



Thermal Resistance

The R-value of ROCKWOOL insulation will not change over time because stone wool is not produced with blowing agents, which off-gas and result in lower thermal performance. Not only is the thermal performance of ROCKWOOL insulation maintained over its lifetime, but the wall's thermal performance remains consistent because ROCKWOOL products are dimensionally stable.

ROCKWOOL insulation will not expand or contract due to temperature variances in the curtain wall system. These attributes result in optimal thermal performance of a building envelope.



Developer Monterey Park used ROCKWOOL CURTAINROCK® insulation for its recently opened 75,000 sq. ft. commercial building in Brampton, Ontario.

Thermal Performance

Product	Specification	Test	Result
CURTAINROCK®	R-Value / inch @ 75°F	ASTM C518 (C177)	4.2 hr.ft².F/Btu 0.74 m²K/W
CURTAINROCK® 40/80	RSI value / 25.4 mm @ 24°C		4.3 hr.ft².F/Btu 0.75 m²K/W



THE RITZ-CARLTON


Putting on the Ritz

The elegant and post-modern 53 storey Ritz-Carlton hotel/condominium in Toronto was built using more than 30,000 sq.ft of CURTAINROCK® and ROXUL SAFE™ insulation. ROCKWOOL insulation is recognized and trusted by top architects and contractors across North America who specify our products for energy efficiency, sustainability, fire protection, water resistance, and sound control. Rumenest asitate labo. Elit pliat od magnimus dollatiora ex et dolo ea voluptam nate verchic ientisto optatur molupta ssaimeo omnis sanisint verum voluptatem

Minimizing Noise with Superior Sound Absorption

CURTAINROCK® demonstrates superior sound attenuation characteristics. The unique multi-directional fiber structure and high density effectively traps and dissipates sound waves, reducing noise transmission into and out of the building.

ROXUL SAFE™ shares the same unique fiber structure and density, also allowing for greater sound attenuation.

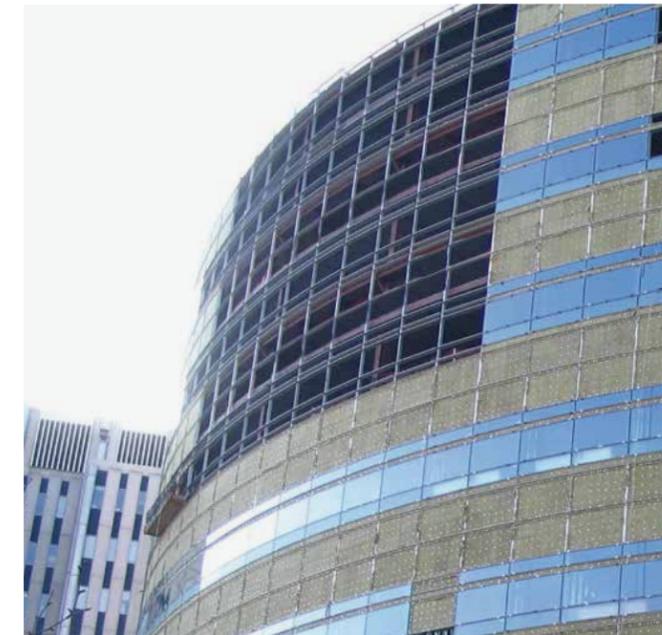

In addition to superior sound absorption properties, ROCKWOOL CURTAINROCK® and ROXUL SAFE™ are frequently specified for a variety of commercial curtain wall applications.

CURTAINROCK® Acoustical Performance

ASTM C 423 CO-EFFICIENTS AT FREQUENCIES							
Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
2"	0.26	0.68	1.12	1.10	1.03	1.04	1.00
3"	0.63	0.95	1.14	1.01	1.03	1.04	1.05
4"	1.03	1.07	1.12	1.04	1.07	1.08	1.10

CURTAINROCK® 40 – Acoustical Performance

ASTM C 423 CO-EFFICIENTS AT FREQUENCIES							
Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
2"	0.26	0.71	1.14	1.09	1.04	1.03	1.00
3"	0.65	0.94	1.13	1.07	1.06	1.04	1.10
4"	0.92	1.04	1.07	1.07	1.07	1.08	1.05

ROXUL SAFE™ – Acoustical Performance


ASTM C 423 CO-EFFICIENTS AT FREQUENCIES							
Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
2"	0.26	0.68	1.12	1.10	1.03	1.04	1.00
3"	0.63	0.95	1.14	1.01	1.03	1.04	1.05
4"	1.03	1.07	1.12	1.04	1.07	1.08	1.10

CURTAINROCK® 80 – Acoustical Performance

ASTM C 423 CO-EFFICIENTS AT FREQUENCIES							
Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
2"	0.39	0.84	1.08	1.01	1.02	1.01	1.00
3"	0.68	0.92	1.08	1.03	1.03	1.03	1.10
4"	1.00	0.95	1.06	1.04	1.06	1.08	1.05



Excellent Moisture Management Features

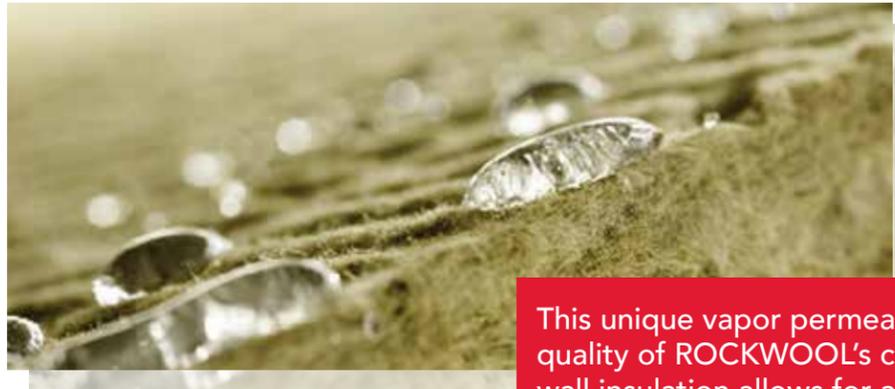

This unique vapor permeable quality of ROCKWOOL's curtain wall insulation allows for an increased potential for drying without trapping water in the wall assembly.

ROCKWOOL CURTAINROCK® and ROXUL SAFE™ are inorganic and therefore do not rot, corrode or promote fungi, mold and bacterial growth.

Both CURTAINROCK® and ROXUL SAFE™ are water repellent, yet vapor permeable (30-40 perms). These products resist the infiltration of water into the insulation layer and facilitate the drainage of water out of the system to enhance the drying potential of curtain wall assemblies.

Moisture Resistance

Product	Specification	Test	Result
CURTAINROCK®, CURTAINROCK® 40	ASTM C 1104	Moisture Sorption	0.01%
ROXUL SAFE™, CURTAINROCK® 80	ASTM C 1104	Moisture Sorption	0.04%

Corrosive Resistance

Product	Specification	Test	Result
CURTAINROCK® CURTAINROCK® 40/80	ASTM C 665	Corrosiveness to Steel	Pass
CURTAINROCK® CURTAINROCK® 40/80	ASTM C 795	Stainless Steel Stress Corrosion Specification as per Test Methods C871 and C692: U.S. Nuclear Regulatory Commission, Reg. Guide #1.36: U.S. Military Specifications MIL-I-24244 (all versions including B and C)	Conforms

Facing Options To Meet Any Application Requirement

ROCKWOOL CURTAINROCK® products are available with or without reinforced foil facing (RFF). For example, CURTAINROCK® 80 RFF is often used in fire rated assemblies, for aesthetics behind glass, and as a vapor barrier. CURTAINROCK® 40 and CURTAINROCK® 80 are approved for use as a component in UL/ULC/Intertek classified perimeter fire containment systems.



Carnegie 57, also known as One57, is a 75-story skyscraper in New York City. Due for completion in 2013, it will be the fourth tallest building in the city. CURTAINROCK® 80 RFF is specified throughout the curtain wall system of this architectural jewel.



At the ROCKWOOL Group, we are committed to enriching the lives of everyone who comes into contact with our solutions. Our expertise is perfectly suited to tackle many of today's biggest sustainability and development challenges, from energy consumption and noise pollution to fire resilience, water scarcity and flooding. Our range of products reflects the diversity of the world's needs, while supporting our stakeholders in reducing their own carbon footprint.

Stone wool is a versatile material and forms the basis of all our businesses. With more than 11,000 employees in 39 countries, we are the world leader in stone wool solutions, from building insulation to acoustic ceilings, external cladding systems to horticultural solutions, engineered fibres for industrial use to insulation for the process industry and marine and offshore.

AFB®, CAVITYROCK®, COMFORTBATT®, CONROCK®, CURTAINROCK®, ROCKBOARD®, TOPROCK®, MONOBOARD®, ROXUL® are registered trademarks of the ROCKWOOL Group in USA and ROXUL Inc. in Canada.

ROCKWOOL™, COMFORTBOARD™, FABROCK™, ROXUL SAFE™, ROCKWOOL PLUS™, and AFB evo™ are trademarks of the ROCKWOOL Group in USA and ROXUL Inc. in Canada.

SAFE'n'SOUND® is a registered trademark used under license by Masonite Inc.

Publication date - edition: 01/2018



ROCKWOOL
8024 Esquesing Line
Milton, ON L9T 6W3
Tel: 1 800 265 6878
rockwool.com

Return to Commercial Applications



CURTAINROCK®

Curtain Wall Insulation



ROCKWOOL CURTAINROCK® is a lightweight, semi-rigid stone wool insulation board designed specifically for use in curtain wall systems, and is best suited for backpan or mechanical fastening applications.

CURTAINROCK® is non-combustible and fire resistant, and will not develop toxic smoke or promote flame spread, even when exposed directly to a fire.

ROCKWOOL insulation has excellent acoustic properties and because the products are dimensionally stable, they maintain thermal performance over their lifetime, even in rising and falling temperatures. This contributes to the optimal performance of a building envelope.

ROCKWOOL offers a variety of curtain wall specifications. Products are also available with or without reinforced foil facing (RFF).

Learn more at rockwool.com

A better fit

CURTAINROCK® is easy to fabricate, cut and install, ensuring an optimal fit.



CURTAINROCK®

Curtain Wall Insulation

Technical Data Sheet

Board Insulation 07210* • Board Insulation 07 21 13**
Curtain wall & glazed assemblies 08 44 00**

ROCKWOOL CURTAINROCK® is a semi-rigid, mineral wool insulation board designed for backpan systems in curtain wall applications.

	Performance	Test Standard
Compliance	Mineral Fiber Block and Board Thermal Insulation - Type IVA Compliant	ASTM C612
Reaction to Fire	Flame spread index = 0; Smoke developed index = 0 Flame spread index = 0; Smoke developed index = 0 Determination of Non Combustibility of Building Materials - Non Combustible Test for Non-Combustibility - Non Combustible Hot Surface Performance - 1200°F	ASTM E84 (UL 723) CAN/ULC S102 CAN/ULC S114 ASTM E136 ASTM C411
Density	Actual Density - 3.5 lbs/ft ³ (56 kg/m ³)	ASTM C303
Dimensional Stability	Linear Shrinkage - < 2 % @ 1200°F	ASTM C356
Corrosion Resistance	Stress Corrosion Cracking Tendency of Austenitic Stainless Steel - Passed Corrosion of Steel - Passed	ASTM C795 ASTM C665
Thermal Resistance	R-Value / inch @ 75°F 4.2 hr.ft ² .F/Btu RSI value / 25.4 mm @ 24°C 0.74 m ² K/W	ASTM C518 (C177)
Reaction to Moisture	Moisture Sorption - 0.01% Water Vapor Transmission, Desiccant Method - 1805ng/Pa.s.m ² (32 perm) Determination of Fungi Resistance - Passed	ASTM C1104 ASTM E96 ASTM C1338
Thickness Dimensions	Product is available in 1" through 5" offerings (25.4 mm - 127 mm) 24" x 48" (610 mm x 1219 mm)	
Acoustical Performance	Thickness	125 Hz 250 Hz 500 Hz 1000 Hz 2000Hz 4000 Hz NRC
	2"	0.26 0.68 1.12 1.1 1.03 1.04 1
	3"	0.63 0.95 1.14 1.01 1.03 1.04 1.05
	4"	1.03 1.07 1.12 1.04 1.07 1.08 1.1

Issued 01-01-18
Supersedes 08-23-17

NOTE: *Master Format 1995 Edition **Master Format 2004 Edition. As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warranty the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.




CURTAINROCK® 40

Curtain Wall Insulation



Fire Resistance

Together CURTAINROCK® and ROXUL SAFE™ are UL/ULC/Intertek approved for perimeter fire containment systems.

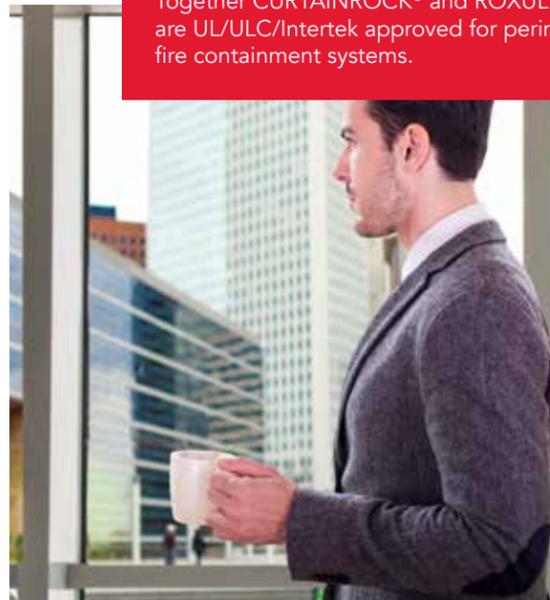

ROCKWOOL CURTAINROCK® 40 is a stone wool insulation board designed for a variety of curtain wall systems. CURTAINROCK® is non-combustible and fire resistant, and will not develop toxic smoke or promote flame spread, even when exposed directly to a fire.

When CURTAINROCK® 40 is used with ROCKWOOL ROXUL SAFE™, they provide a comprehensive fire-stopping system that has been UL/ULC/Intertek tested and approved for perimeter fire containment systems.

ROCKWOOL insulation has excellent acoustic properties and are dimensionally stable – maintaining thermal performance over their lifetime, even in rising and falling temperatures. This contributes to the optimal performance of a building envelope.

CURTAINROCK® products are available with or without reinforced foil facing (RFF).

Learn more at rockwool.com



CURTAINROCK® 40

Curtain Wall Insulation

Technical Data Sheet

Board Insulation 07210* • Board Insulation 07 21 13**
Curtain wall & glazed assemblies 08 44 00**

ROCKWOOL CURTAINROCK® 40 is a semi-rigid, mineral wool insulation board designed for fire rated curtain wall applications.

	Performance	Test Standard	
Compliance	Mineral Fiber Block and Board Thermal Insulation - Type IVB Compliant MEA Approval, New York City Approval	ASTM C612 331-97-M	
Reaction to Fire	Flame spread index = 0; Smoke developed index = 0 Flame spread index = 0; Smoke developed index = 0 Determination of Non Combustibility of Building Materials - Non Combustible Test for Non-Combustibility - Non Combustible Hot Surface Performance - 1200°F Perimeter Fire Barrier Systems - Consult UL Directory	ASTM E84 (UL 723) CAN/ULC S102 CAN/ULC S114 ASTM E136 ASTM C411 ASTM E2307/E119	
Density	Nominal Density, Minimum - 4.0 lbs/ft³ (64 kg/m³)	ASTM C303	
Dimensional Stability	Linear Shrinkage - < 1 % @ 1200°F	ASTM C356	
Corrosion Resistance	Stress Corrosion Cracking Tendency of Austenitic Stainless Steel - Passed Corrosion of Steel - Passed	ASTM C795 ASTM C665	
Thermal Resistance	R-Value / inch @ 75°F RSI value / 25.4 mm @ 24°C	4.3 hr.ft².F/Btu 0.75 m²K/W	ASTM C518 (C177)
Reaction to Moisture	Moisture Sorption - 0.01% Determination of Fungi Resistance - Passed	ASTM C1104 ASTM C1338	
Thickness Dimensions Facing	Product is available in 2" through 4" offerings (50.8 mm - 101.6 mm) 24" x 48" (610 mm x 1219 mm) and 48" x 72" (1219 mm x 1829 mm) Product is available with a reinforced foil facer		



Issued 01-01-18
Supersedes 08-23-17

NOTE: *Master Format 1995 Edition **Master Format 2004 Edition. As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warranty the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.



8024 Esquesing Line, Milton, ON L9T 6W3
Tel: 800-265-6878 • Fax: 800-991-0110
rockwool.com

Return to Commercial Applications



CURTAINROCK® 80

Curtain Wall Insulation



ROCKWOOL CURTAINROCK® 80 is a stone wool insulation board designed for a variety of curtain wall systems. CURTAINROCK® is non-combustible and fire resistant, and will not develop toxic smoke or promote flame spread, even when exposed directly to a fire.

When CURTAINROCK® 80 is used with ROCKWOOL ROXUL SAFE™, they provide a comprehensive fire-stopping system that has been UL/ULC/Intertek tested and approved for perimeter fire containment systems.


ROCKWOOL insulation has excellent acoustic properties and is dimensionally stable – maintaining thermal performance over their lifetime, even in rising and falling temperatures. This contributes to the optimal performance of a building envelope.

CURTAINROCK® products are available with or without reinforced foil facing (RFF).

Learn more at rockwool.com

Fire Resistance

Together CURTAINROCK® and ROXUL SAFE™ are UL/ULC/Intertek approved for perimeter fire containment systems.

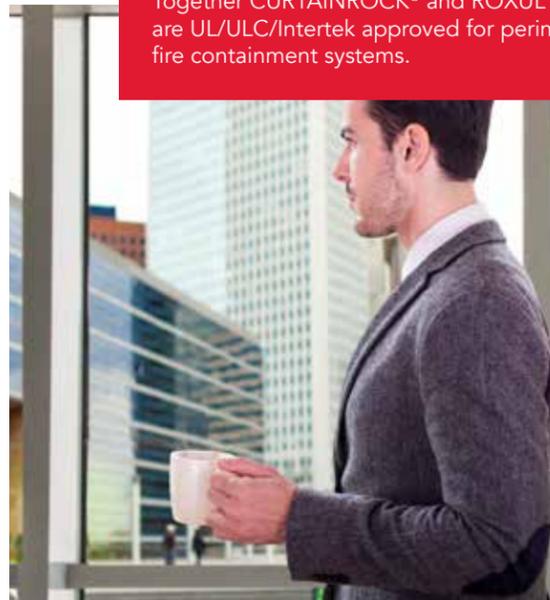

CURTAINROCK® 80

Curtain Wall Insulation

Technical Data Sheet

Board Insulation 07210* • Board Insulation 07 21 13**
Curtain wall & glazed assemblies 08 44 00**

ROCKWOOL CURTAINROCK® 80 is a rigid, mineral wool insulation board designed for fire rated curtain wall applications.

	Performance	Test Standard	
Compliance	Mineral Fiber Block and Board Thermal Insulation - Type IVB Compliant MEA Approval, New York City Approval	ASTM C612 331-97-M	
Reaction to Fire	Flame spread index = 0; Smoke developed index = 0 Flame spread index = 0; Smoke developed index = 0 Determination of Non Combustibility of Building Materials - Non Combustible Test for Non-Combustibility - Non Combustible Hot Surface Performance - 1200°F Perimeter Fire Barrier Systems - Consult UL Directory	ASTM E84 (UL 723) CAN/ULC S102 CAN/ULC S114 ASTM E136 ASTM C411 ASTM E2307/E119	
Density	Nominal Density - 8.0 lbs/ft ³ (128 kg/m ³)	ASTM C303	
Dimensional Stability	Linear Shrinkage - < 1 % @ 1200°F	ASTM C356	
Corrosion Resistance	Stress Corrosion Cracking Tendency of Austenitic Stainless Steel - Passed Corrosion of Steel - Passed	ASTM C795 ASTM C665	
Thermal Resistance	R-Value / inch @ 75°F RSI value / 25.4 mm @ 24°C	4.3 hr.ft ² .F/Btu 0.75 m ² K/W	ASTM C518 (C177)
Reaction to Moisture	Moisture Sorption - 0.04% Determination of Fungi Resistance - Passed	ASTM C1104 ASTM C1338	
Thickness Dimensions Facing	Product is available in 1" through 5" offerings (25.4 mm - 127 mm) 24" x 48" (610 mm x 1219 mm) and 48" x 72" (1219 mm x 1829 mm) Product is available with a reinforced foil facer		



Issued 01-01-18
Supersedes 08-23-17

NOTE: *Master Format 1995 Edition **Master Format 2004 Edition. As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warranty the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.



8024 Esquesing Line, Milton, ON L9T 6W3
Tel: 800-265-6878 • Fax: 800-991-0110
rockwool.com

Return to Commercial Applications



ROXUL SAFE™

Fire Safing Insulation



ROXUL SAFE™

Fire Safing Insulation

Technical Data Sheet

Firestopping 07840* • Firestopping 07 84 00**
Fibrous Fire Safing 07 84 56.13** • Curtain wall & glazed assemblies 08 44 00**

ROCKWOOL ROXUL SAFE™ is semi-rigid, mineral wool batt insulation approved for use in fire rated joints, through penetrations and perimeter fire containment systems.

	Performance	Test Standard
Compliance	Mineral Fiber Block and Board Thermal Insulation - Type IVA Compliant MEA Approval, New York City Approval	ASTM C612 339-97-M
Reaction to Fire	Flame spread index = 0; Smoke developed index = 0 Flame spread index = 0; Smoke developed index = 0 Determination of Non Combustibility of Building Materials - Non Combustible Test for Non-Combustibility - Non Combustible Fire Tests of Firestop Systems Fire Tests of Penetration Firestop Systems Tests for Fire Resistance of Building Joint Systems Perimeter Fire Barrier Systems Smoulder Resistance - 0.01% Consult UL, ULC and Intertek Directories for fire rated designs	ASTM E84 (UL 723) CAN/ULC S102 CAN/ULC S114 ASTM E136 CAN/ULC S115 ASTM E814 (UL 1479) UL 2079 ASTM E2307/E119 CAN/ULC S129
Density	Actual Density - 4.5 lbs/ft ³ (72 kg/m ³)	ASTM C303
Corrosion Resistance	Stress Corrosion Cracking Tendency of Austenitic Stainless Steel - Passed Corrosion of Steel - Passed	ASTM C795 ASTM C665
Reaction to Moisture	Moisture Sorption by weight - 0.04% Determination of Fungi Resistance - Passed	ASTM C1104 ASTM C1338
Thickness Dimensions	Product is available in 2", 3" and 4" (50.8 mm, 76.2 mm and 101.6 mm) 24" x 48" (610 mm x 1219 mm)	

ROCKWOOL ROXUL SAFE™ is a lightweight, semi-rigid stone wool insulation that provides fire-stopping and acoustical properties. It is designed to fill perimeter gaps between concrete floor slabs and exterior wall systems, between firewalls and ceiling slabs, and around conduit pipes and duct openings through walls and floor slabs.

It is non-combustible and fire resistant, and will not develop toxic smoke or promote flame spread, even when exposed directly to a fire. When ROXUL SAFE™ is used with CURTAINROCK® 40/80, it provides a comprehensive fire-stopping system that has been UL/ULC/Intertek tested and approved for perimeter fire containment systems.

ROXUL SAFE™ also helps to increase energy efficiency, improve thermal stability and reduce noise transmission into and out of the building for overall occupant comfort.

Learn more at rockwool.com

Fire-stopping Material

ROXUL SAFE™ is always used in conjunction with a fire sealant to prevent passage of fire and smoke from one area to the next.





Issued 01-01-18
Supersedes 08-23-17

NOTE: *Master Format 1995 Edition **Master Format 2004 Edition. As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warranty the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.



ROCKBOARD® 40/60/80

Premium Multipurpose Board Insulation
for Acoustic/Thermal Applications

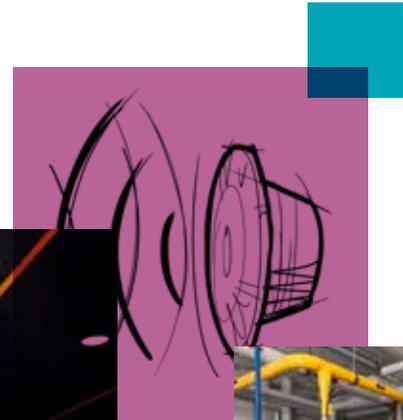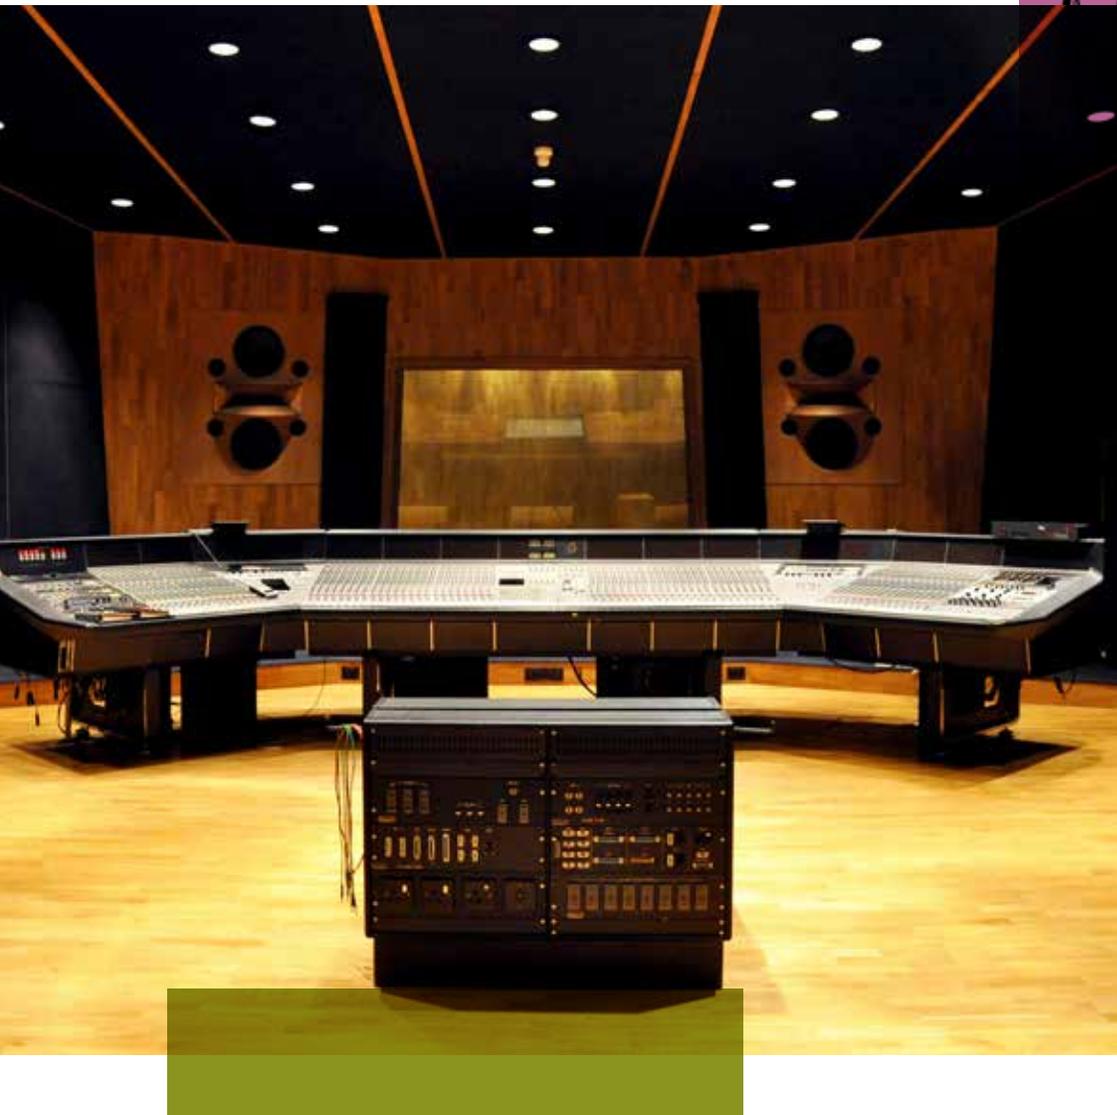

ROCKWOOL ROCKBOARD® Provides Superior Sound Absorption

Acoustic Performance

ROCKWOOL stone wool insulation products are specified for high acoustical performance. There are two physical characteristics that support this result. One is the multi-directional fiber orientation, the other is the density of the products.

ROCKBOARD® products and applications are available in various densities to support different applications. ROCKBOARD® 60 in particular has exceptional energy absorbing characteristics and is effective at reducing sound transmission across a wide range of frequencies.

ROCKBOARD® has superior acoustic properties making it ideal for theaters, recording studios and other sound damping applications.



ROCKBOARD® 40 – Acoustical Performance

ASTM C423 CO-EFFICIENTS AT FREQUENCIES							
Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
2.0"	0.26	0.68	1.12	1.10	1.03	1.04	1.00
3.0"	0.63	0.95	1.14	1.01	1.03	1.04	1.05
4.0"	1.03	1.07	1.12	1.04	1.07	1.08	1.10

ROCKBOARD® 60 – Acoustical Performance

ASTM C423 CO-EFFICIENTS AT FREQUENCIES							
Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
2.0"	0.32	0.81	1.06	1.02	0.99	1.04	0.95
3.0"	0.78	0.89	1.04	0.98	1.01	1.02	1.00

ROCKBOARD® 80 – Acoustical Performance

ASTM C423 CO-EFFICIENTS AT FREQUENCIES							
Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
1.0"	0.11	0.31	0.82	1.01	1.02	1.01	0.80
2.0"	0.43	0.78	0.90	0.97	0.97	1.00	0.90
3.0"	0.75	0.82	0.89	0.94	1.00	1.00	.90

Thermal Integrity & Moisture Control

Thermal Integrity

Stone wool is naturally denser than fiberglass, and will maintain its dimensional integrity under all conditions. It will not slump, shrink, expand with temperature fluctuations or compress under light loads as competitive insulations are prone to do.

Thermal Resistance

ROCKBOARD® 40 ASTM C518 (C177)	R-value/inch @ 75 °F RSI value/25.4 mm @ 24 °C	4.2 hr.ft².F/BTU 0.74 m²K/W
ROCKBOARD® 60 ASTM C518 (C177)	R-value/inch @ 75 °F RSI value/25.4 mm @ 24 °C	4.3 hr.ft².F/BTU 0.75 m²K/W
ROCKBOARD® 80 ASTM C518 (C177)	R-value/inch @ 75 °F RSI value/25.4 mm @ 24 °C	4.0 hr.ft².F/BTU 0.70 m²K/W

Water Repellent Insulation – Will not Rot, Corrode, Promote Mold or Bacterial Growth

Moisture can cause a number of structural and/or aesthetic problems within commercial buildings. As an integral part of any building design, proper ventilation is necessary to allow any built-up condensation to drain out of the system. ROCKBOARD® stone wool insulation is water repellent, helping to deflect moisture away from the surface, alleviating potential issues.

ROCKBOARD® insulation is inorganic, and will not rot, corrode, or promote fungi or bacteria growth, which means the potential for related environmental health issues is also mitigated as a result.



ROCKBOARD® is ideal for maintaining thermal integrity and moisture control in interior applications.



Moisture Resistance

ROCKBOARD® 40/60/80 ASTM C1104	Moisture Sorption	< 0.08%
-----------------------------------	-------------------	---------

Fungi Resistance

ROCKBOARD® 40/60/80 ASTM C1338	Determination of Fungi Resistance	Passed
-----------------------------------	-----------------------------------	--------



Fire Resistant Insulation – Protecting both the Building and the Occupants


Fire Resistance

ROCKBOARD® products are non-combustible. ROCKWOOL stone wool has an extremely high melting point of 2150 °F (1177 °C) compared to fiberglass at ~1112 °F (~600 °C), thermoplastic insulation at 160-600 °F (~70-315 °C). ROCKBOARD® products do not produce toxic smoke in the event of a fire and are an excellent barrier against the spread of flames to help protect occupants and reduce property damage.


Fire Performance

ROCKBOARD® 40/60/80 CAN/ULC S114	Test for Non-Combustibility	Non-Combustible
ROCKBOARD® 40/60/80 ASTM E84 (UL723)	Surface Burning Characteristics	Flame Spread = 0 Smoke Developed = 0
ROCKBOARD® 40/60/80 CAN/ULC S102	Surface Burning Characteristics	Flame Spread = 0 Smoke Developed = 0

Temperature Development in a Standard Fire (ASTM E119)

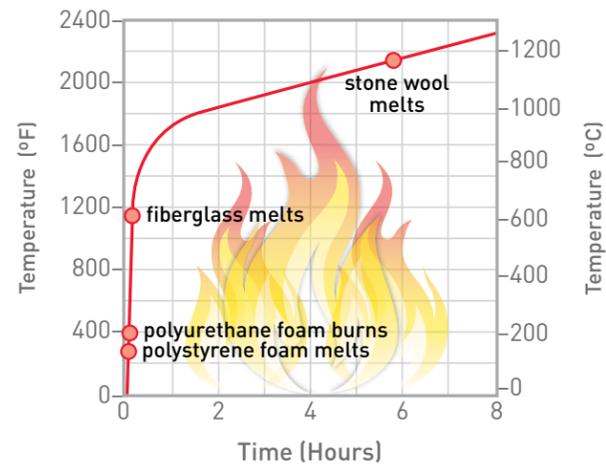

In an application where elevated temperatures are a concern, stone wool will provide greater protection than fiberglass. The maximum service temperature of stone wool insulation when tested to ASTM C411 is 1200 °F (650 °C), compared to fiberglass which is limited to a maximum service temperature of 450 °F (232 °C).

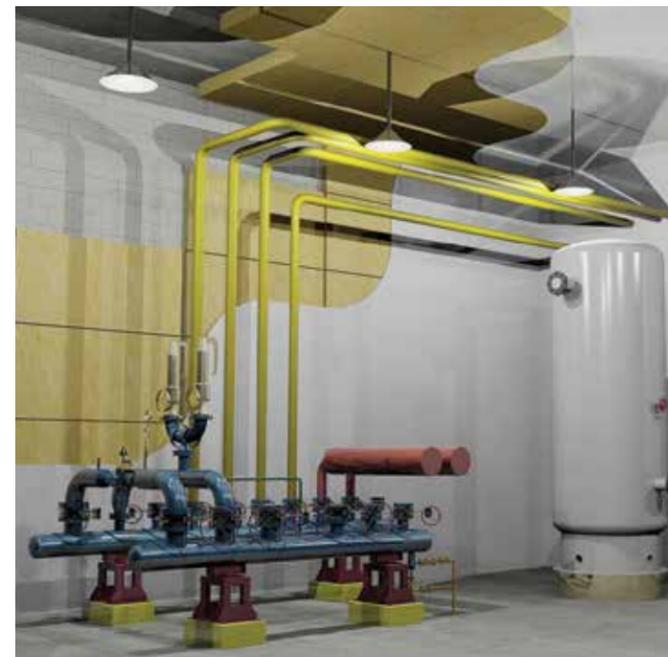

ROCKBOARD® adds an extra degree of fire resistance around utility rooms.

Maximum Service Temperature

ROCKBOARD® 40/60/80	ASTM C411	Hot Surface Performance	In Compliance with ASTM C612 @ 1200 °F (650 °C)
---------------------	-----------	-------------------------	---

ROCKBOARD® Products and Applications

Product	Density	Thicknesses	W X L	Common Applications
ROCKBOARD® 40	4 lb/ft³ (64kg/m³)	2", 2.5", 3", 4"	24" x 48"	Mechanical/Utility rooms
ROCKBOARD® 60	6 lb/ft³ (96kg/m³)	2", 3", 3.5", 4"	24" x 48"	Theaters, Recording studios, Metal roofs requiring snow load
ROCKBOARD® 80	8 lb/ft³ (128kg/m³)	1", 1.5", 2", 3", 4"	24" x 48"	Surfaces requiring wind load (e.g. substrate for stucco walls)

Facing Options

Facing can help to obtain optimum thermal and energy efficiency, structural integrity, and enhanced interior aesthetics with minimal cost impact on the overall project. ROCKBOARD® can be surfaced with a variety of facings to deliver the desired result. Please contact your ROCKWOOL® sales representative for our complete facing offering and technical information related to materials, permeability, light reflectance, and fire performance. Fire Resistant Insulation – Protecting both the Building and the Occupants.

Dimensional Stability

ROCKBOARD® 40 ASTM C356	Linear Shrinkage	0.47 % @ 1200 °F (650 °C)
ROCKBOARD® 60 ASTM C356	Linear Shrinkage	1.14 % @ 1200 °F (650 °C)
ROCKBOARD® 80 ASTM C356	Linear Shrinkage	0.41 % @ 1200 °F (650 °C)

Compressive Strength

	@10%	@25%
ROCKBOARD® 40 ASTM C165	90 psf (4.3 kPa)	226 psf (10.8 kPa)
ROCKBOARD® 60 ASTM C165	196 psf (9.4 kPa)	547 psf (26.2 kPa)
ROCKBOARD® 80 ASTM C165	353 psf (16.9 kPa)	794 psf (38 kPa)

Compliance and Performance

ROCKBOARD® 40 ASTM C612	Mineral Fiber Block and Board Thermal Insulation	Type IVA, Complies
ROCKBOARD® 60/80 ASTM C612	Mineral Fiber Block and Board Thermal Insulation	Type IVB, Complies

ROCKBOARD® has excellent sound-damping characteristics making it ideal for buffering the hum from noisy mechanical rooms.



At the ROCKWOOL Group, we are committed to enriching the lives of everyone who comes into contact with our solutions. Our expertise is perfectly suited to tackle many of today's biggest sustainability and development challenges, from energy consumption and noise pollution to fire resilience, water scarcity and flooding. Our range of products reflects the diversity of the world's needs, while supporting our stakeholders in reducing their own carbon footprint.

Stone wool is a versatile material and forms the basis of all our businesses. With more than 11,000 employees in 39 countries, we are the world leader in stone wool solutions, from building insulation to acoustic ceilings, external cladding systems to horticultural solutions, engineered fibres for industrial use to insulation for the process industry and marine and offshore.

AFB®, CAVITYROCK®, COMFORTBATT®, CONROCK®, CURTAINROCK®, ROCKBOARD®, TOPROCK®, MONOBOARD®, ROXUL® are registered trademarks of the ROCKWOOL Group in USA and ROXUL Inc. in Canada.

ROCKWOOL™, COMFORTBOARD™, FABROCK™, ROXUL SAFE™, ROCKWOOL PLUS™, and AFB evo™ are trademarks of the ROCKWOOL Group in USA and ROXUL Inc. in Canada.

SAFE'n'SOUND® is a registered trademark used under license by Masonite Inc.

Publication date - edition: 01/2018




ROCKWOOL
8024 Esquesing Line
Milton, ON L9T 6W3
Tel: 1 800 265 6878
rockwool.com

Return to Commercial Applications



ROCKBOARD® 40

Multipurpose Board Insulation

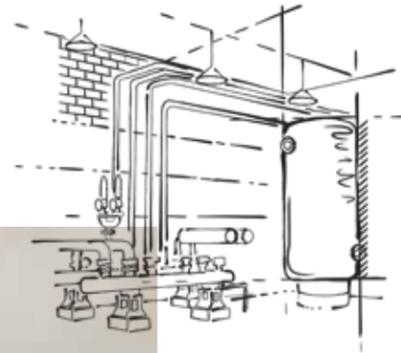

ROCKBOARD® 40

Multipurpose Board Insulation

Technical Data Sheet
 Board Insulation 07210* • Board Insulation 07 21 13**
 Acoustic Board Insulation 09 81 13**

ROCKWOOL ROCKBOARD® 40 is a semi-rigid, multi-purpose mineral wool insulation board.

	Performance	Test Standard
Compliance	Mineral Fiber Block and Board Thermal Insulation - Type IVA Compliant	ASTM C612
Reaction to Fire	Flame spread index = 0; Smoke development index = 0 Flame spread index = 0; Smoke development index = 0 Behaviour of materials at 750°C - Non Combustible Test for Non-Combustibility - Non Combustible Hot Surface Performance - 1200°F	ASTM E84 (UL 723) CAN/ULC S102 CAN/ULC S114 ASTM E136 ASTM C411
Density	Actual Density - 4 lbs/ft ³ (64 kg/m ³)	ASTM C303
Dimensional Stability	Linear Shrinkage - <1% @ 1200°F	ASTM C356
Corrosion Resistance	Stress Corrosion Cracking Tendency of Austenitic Stainless Steel - Passed Corrosion of Steel - Passed	ASTM C795 ASTM C665
Thermal Resistance	R-Value / inch @ 75°F 4.2 hr.ft ² .F/Btu RSI value / 25.4 mm @ 24°C 0.74 m ² .K/W	ASTM C518 (C177)
Reaction to Moisture	Moisture Sorption by weight - 0.03% Determination of Fungi Resistance - Passed	ASTM C1104 ASTM C1338
Compressive Strength	90psf (4.3kPa) @ 10% compression 225psf (10.8kPa) @ 25% compression	ASTM C165
Air Erosion	Maximum Air Velocity 1000 fpm (5.08 m/s)	UL 181
Thickness Dimensions	Product is available in 1" through 4" offerings (25.4 mm - 101.6 mm) 24" x 48" (610 mm x 1219 mm)	

Acoustical Performance	Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000Hz	4000 Hz	NRC	ASTM C423
	1.0"	0.07	0.32	0.77	1.04	1.05	1.05	0.8	
1.5"	0.18	0.48	0.96	1.09	1.05	1.05	0.9		
2"	0.26	0.68	1.12	1.1	1.03	1.04	1		
3"	0.63	0.95	1.14	1.01	1.03	1.04	1.05		
4"	1.03	1.07	1.12	1.04	1.07	1.08	1.1		

Issued 01-01-18
 Supersedes 08-23-17

NOTE: *Master Format 1995 Edition **Master Format 2004 Edition. As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warranty the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.

ROCKWOOL ROCKBOARD® 40 is a premium, multi-purpose stone wool insulation board used in walls, ceilings and floors for acoustic and thermal applications.

ROCKBOARD® 40 is non-combustible and fire resistant, and will not produce toxic smoke or promote flame spread, even when exposed directly to a fire. This can add an extra degree of fire resistance and contribute to occupant protection.


ROCKBOARD® products also maintain dimensional integrity under all conditions and, as a result, will not slump, shrink or expand with temperature.

ROCKBOARD® products can be surfaced with different facings to achieve optimal performance results. From mechanical rooms to sound studios to utility rooms, these products add a high-performance barrier to noise and fire.

Learn more at rockwool.com

Superior Acoustic Properties

Excellent sound-dampening characteristics make ROCKBOARD® products ideal for buffering the hum from noisy mechanical rooms.

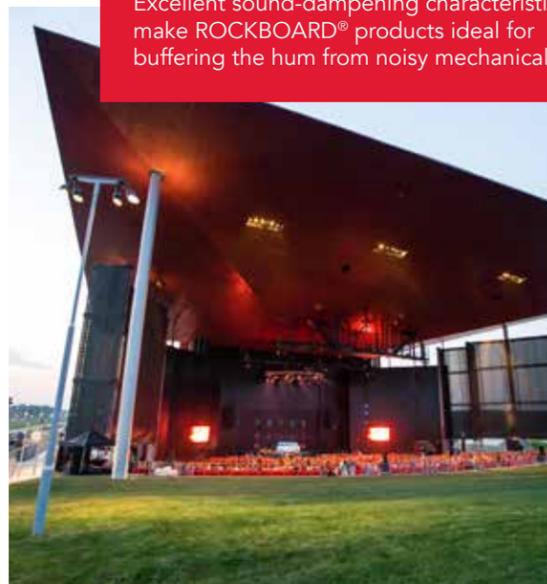


8024 Esquesing Line, Milton, ON L9T 6W3
 Tel: 800-265-6878 • Fax: 800-991-0110
rockwool.com

Return to Commercial Applications



ROCKBOARD® 60

Multipurpose Board Insulation

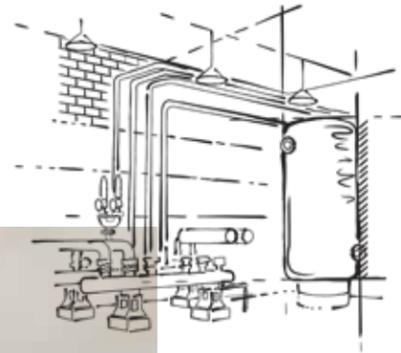

ROCKBOARD® 60

Multipurpose Board Insulation

Technical Data Sheet

Board Insulation 07210* • Board Insulation 07 21 13**
Acoustic Board Insulation 09 81 13**

ROCKWOOL ROCKBOARD® 60 is a rigid, multi-purpose mineral wool insulation board.

	Performance	Test Standard							
Compliance	Mineral Fiber Block and Board Thermal Insulation - Type IVB Compliant	ASTM C612							
Reaction to Fire	Flame spread index = 0; Smoke development index = 0 Flame spread index = 0; Smoke development index = 0 Behaviour of materials at 750°C - Non Combustible Hot Surface Performance - 1200°F	ASTM E84 (UL 723) CAN/ULC S102 CAN/ULC S114 ASTM C411							
Density	Actual Density - 6 lbs/ft ³ (96 kg/m ³)	ASTM C303							
Dimensional Stability	Linear Shrinkage - <1% @ 1200°F	ASTM C356							
Corrosion Resistance	Stress Corrosion Cracking Tendency of Austenitic Stainless Steel - Passed Corrosion of Steel - Passed	ASTM C795 ASTM C665							
Thermal Resistance	R-Value / inch @ 75°F 4.3 hr.ft ² .F/Btu RSI value / 25.4 mm @ 24°C 0.75 m ² K/W	ASTM C518 (C177)							
Reaction to Moisture	Moisture Sorption by weight - 0.07% Determination of Fungi Resistance - Passed	ASTM C1104 ASTM C1338							
Compressive Strength	355psf (17kPa) @ 10% compression 585psf (28kPa) @ 25% compression	ASTM C165							
Thickness Dimensions	Product is available in 2" through 4" offerings (50.8 mm - 101.6 mm) 24" x 48" (610 mm x 1219 mm)								
Acoustical Performance	Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000Hz	4000 Hz	NRC	ASTM C423
	2"	0.32	0.81	1.06	1.02	0.99	1.04	0.95	
	3"	0.78	0.89	1.04	0.98	1.01	1.02	1	

Issued 01-01-18
Supersedes 08-23-17

NOTE: *Master Format 1995 Edition **Master Format 2004 Edition. As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warranty the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.

ROCKWOOL ROCKBOARD® 60 is a premium, multi-purpose stone wool insulation board used in walls, ceilings and floors for acoustic and thermal applications.

ROCKBOARD® 60 is non-combustible and fire resistant, and will not produce toxic smoke or promote flame spread, even when exposed directly to a fire. This can add an extra degree of fire resistance and contribute to occupant protection.


ROCKBOARD® products also maintain dimensional integrity under all conditions and, as a result, will not slump, shrink or expand with temperature.

ROCKBOARD® products can be surfaced with different facings to achieve optimal performance results. From mechanical rooms to sound studios to utility rooms, these products add a high-performance barrier to noise and fire.

Learn more at rockwool.com

Superior Acoustic Properties

Excellent sound-dampening characteristics make ROCKBOARD® products ideal for buffering the hum from noisy mechanical rooms.

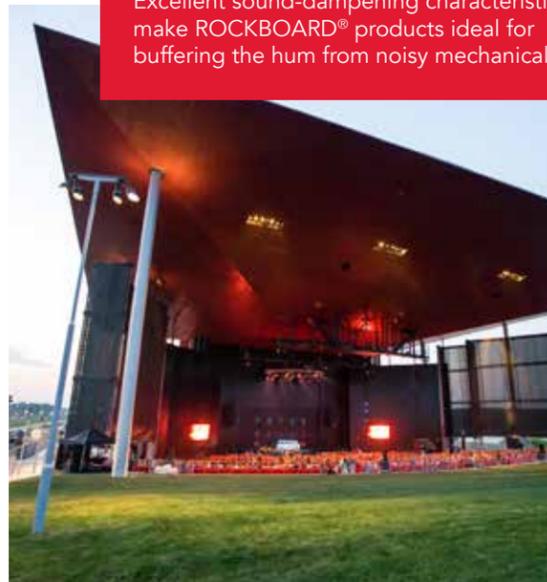


8024 Esquesing Line, Milton, ON L9T 6W3
Tel: 800-265-6878 • Fax: 800-991-0110
rockwool.com

Return to Commercial Applications



ROCKBOARD® 80

Multipurpose Board Insulation

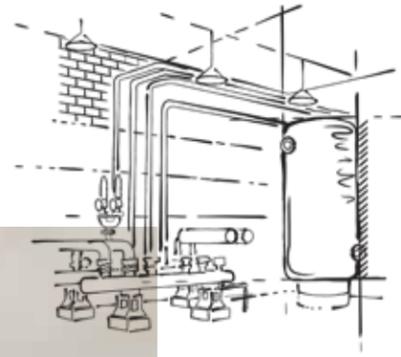

ROCKBOARD® 80

Multipurpose Board Insulation

Technical Data Sheet

Board Insulation 07210* • Board Insulation 07 21 13**
Acoustic Board Insulation 09 81 13**

ROCKWOOL ROCKBOARD® 80 is a rigid, multi-purpose mineral wool insulation board.

	Performance	Test Standard							
Compliance	Mineral Fiber Block and Board Thermal Insulation - Type IVB Compliant	ASTM C612							
Reaction to Fire	Flame spread index = 0; Smoke developed index = 0 Flame spread index = 0; Smoke developed index = 0 Determination of Non Combustibility of Building Materials - Non Combustible Hot Surface Performance - 1200°F	ASTM E84 (UL 723) CAN/ULC S102 CAN/ULC S114 ASTM C411							
Density	Actual Density - 8 lbs/ft ³ (128 kg/m ³)	ASTM C303							
Dimensional Stability	Linear Shrinkage - <1% @ 1200°F	ASTM C356							
Corrosion Resistance	Stress Corrosion Cracking Tendency of Austenitic Stainless Steel - Passed Corrosion of Steel - Passed	ASTM C795 ASTM C665							
Thermal Resistance	R-Value / inch @ 75°F 4.0 hr.ft ² .F/Btu RSI value / 25.4 mm @ 24°C 0.70 m ² K/W	ASTM C518 (C177)							
Reaction to Moisture	Moisture Sorption by weight - 0.05% Determination of Fungi Resistance - Passed	ASTM C1104 ASTM C1338							
Compressive Strength	439psf (21kPa) @ 10% compression 1065psf (50kPa) @ 25% compression	ASTM C165							
Thickness Dimensions	Product is available in 2" through 4" offerings (50.8 mm - 101.6 mm) 24" x 48" (610 mm x 1219 mm)								
Acoustical Performance	Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000Hz	4000 Hz	NRC	ASTM C423
	2"	0.43	0.78	0.9	0.97	0.97	1	0.9	
	3"	0.75	0.82	0.89	0.94	1	1	0.9	

ROCKWOOL ROCKBOARD® 80 is a premium, multi-purpose stone wool insulation board used in walls, ceilings and floors for acoustic and thermal applications.

ROCKBOARD® 80 is non-combustible and fire resistant, and will not produce toxic smoke or promote flame spread, even when exposed directly to a fire. This can add an extra degree of fire resistance and contribute to occupant protection.


ROCKBOARD® products also maintain dimensional integrity under all conditions and, as a result, will not slump, shrink or expand with temperature.

ROCKBOARD® products can be surfaced with different facings to achieve optimal performance results. From mechanical rooms to sound studios to utility rooms, these products add a high-performance barrier to noise and fire.

Learn more at rockwool.com

Superior Acoustic Properties

Excellent sound-dampening characteristics make ROCKBOARD® products ideal for buffering the hum from noisy mechanical rooms.

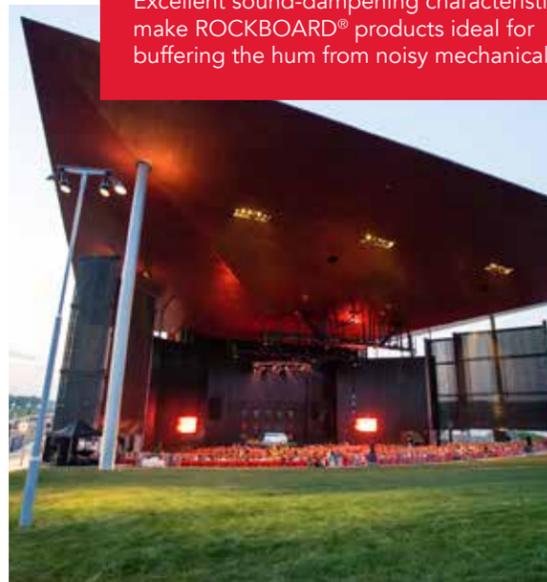

Issued 01-01-18
Supersedes 08-23-17

NOTE: *Master Format 1995 Edition **Master Format 2004 Edition. As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warranty the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.




8024 Esquesing Line, Milton, ON L9T 6W3
Tel: 800-265-6878 • Fax: 800-991-0110
rockwool.com

Return to Commercial Applications



ROXUL SAFE™ 55 & 65 and ROCKWOOL PLUS™ MB

Insulation for Pre-Engineered Metal Buildings

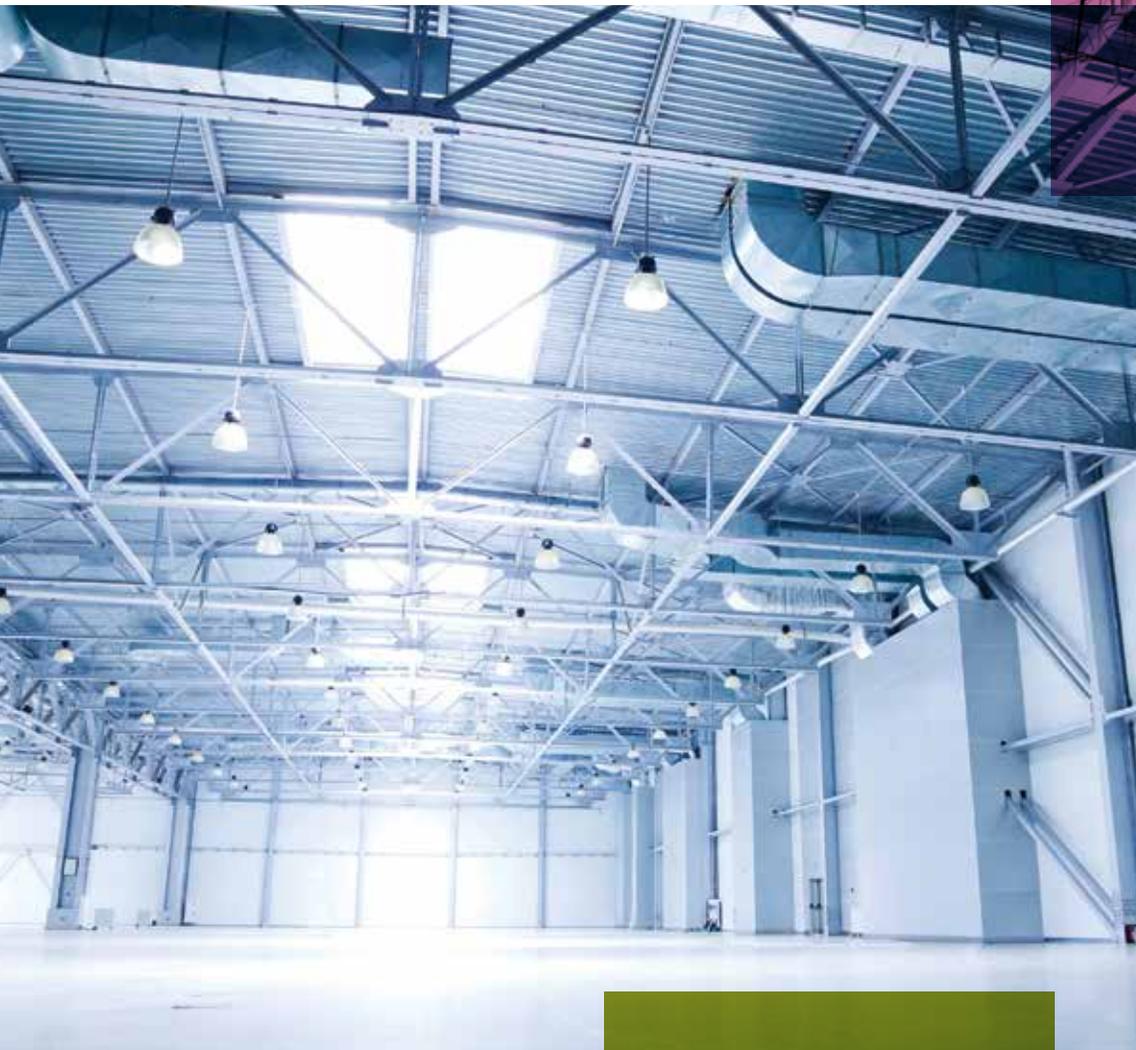

Exterior Wall Insulation for Pre-Engineered Metal Buildings

ROXUL SAFE™ 55 & 65 and ROCKWOOL PLUS™ MB are non-combustible, high-density insulation products for interior and exterior walls in pre-engineered metal building construction. This stone wool insulation is made from natural stone and recycled content, providing exceptional fire-resistance and energy-saving properties. While similar in thermal insulating properties, each product is designed for specific building applications.



ROXUL SAFE™ 55 & 65 and ROCKWOOL PLUS™ MB products are used to insulate walls in pre-engineered metal buildings. ROXUL SAFE™ 55 & 65 are ideally suited for zero lot line applications where buildings are in close proximity and fire safety is essential.

Assemblies for Zero Lot Line and Exterior Wall Applications

Basic Concept of a Fire Rated Wall Featuring ROXUL SAFE™ 55 & 65 Insulation in the Wall Assembly

ROXUL SAFE™ 55 & 65 are non-combustible, rigid stone wool insulation boards that provide added fire protection for metal buildings in close proximity. ROXUL SAFE™ 55 & 65 are designed for interior or exterior non-load bearing metal panel wall assemblies where a fire resistance rating is required.

ROCKWOOL offers the option of one or two hour, single side or double sided fire rated assemblies.

ROCKWOOL PLUS™ MB is a lightweight, non-combustible, semi-rigid blanket insulation, designed for metal building construction where an hourly fire rating is not required.

Insulating buildings with ROCKWOOL PLUS™ MB will help increase energy efficiency, improve thermal stability, and enhance fire protection for the overall comfort and safety of occupants.

That's why ROCKWOOL PLUS™ MB is the insulation of choice for today's green builders in commercial construction.



Components: Exterior Metal Cladding, ROXUL SAFE™ 55 or 65, Z-Bar Girts, Ceramic Fire Blanket (Z-Girt Cover), Flashing Channels, Wall and Partition Facings/Accessories

Note: For ULC Designs W610 and W611 ceramic strips required on two sides. For actual designs please reference UL/ULC Directories.



Components: Exterior Metal Cladding, ROCKWOOL PLUS™ MB, Z-Bar Girts, Flashing Channels, Wall and Partition Facings/Accessories



These products also provide superior performance in acoustic assemblies, as well as in applications for mechanical equipment isolation and insulation.



Fire Resistance


ROXUL SAFE™ 55, ROXUL SAFE™ 65 and ROCKWOOL PLUS™ MB are non-combustible, able to withstand temperatures up to 2150°F (1177°C), and do not produce smoke or propagate flames, providing a critical line of defense in fire protection.

These products provide high temperature fire protection, particularly when a fire separation wall is required

ROXUL SAFE™ 55 & 65's fire resistance ratings allow builders to reduce the required separation and increase the area of buildings in close proximity to each other.



Temperature Development in a Standard Fire (ASTM E119)

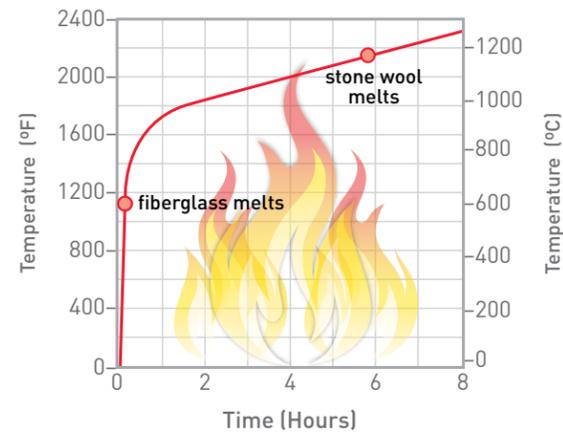

ROXUL SAFE™ 55 & 65 are able to withstand the intense heat of fire approaching 2150°F (1177°C) without melting or burning. They are specifically designed to meet building codes in high density areas where buildings are in close proximity.

Fire-Rated Exterior Non-Load Bearing Sheet Steel Walls

Product	Fire Resistance Rating	Fire Protection	UL Design No.	ULC Design No.	Thickness*	W x L
ROXUL SAFE™ 65	1HR	From 1 Side	U654	W605	3" (76 mm) (2 layers)	24" x 48" (610 x 1220 mm)
		From 2 Sides	*Contact ROCKWOOL Technical Services	W610		31.5" x 48" (800 x 1220 mm) 32" x 48" (813 x 1220 mm)
ROXUL SAFE™ 55	2HR	From 1 Side	U655	W606	4" (102 mm) (2 layers)	24" x 48" (610 x 1220 mm)
		From 2 Sides	*Contact ROCKWOOL Technical Services	W611		31.5" x 48" (800 x 1220 mm) 32" x 48" (813 x 1220 mm)

*ROXUL SAFE™ 65 & ROXUL SAFE™ 55 products are installed using 2 layers of 3" or 4" material respectively.

High-Performance Insulation Designed for Pre-Engineered Metal Buildings

Energy-Saving Thermal Performance

The excellent thermal properties of ROCKWOOL PLUS™ MB, ROXUL SAFE™ 55 and ROXUL SAFE™ 65 contribute to energy efficient building envelopes helping to reduce ongoing energy costs. ROCKWOOL PLUS™ MB delivers consistent thermal performance across the board in metal building wall construction, maintaining an R-value of R4. ROXUL SAFE™ 65 and ROXUL SAFE™ 55 maintain R-values of R4.2 and R4.3, respectively.



Superior Sound Absorption

ROXUL SAFE™ 55, ROXUL SAFE™ 65 and ROCKWOOL PLUS™ MB demonstrate superior sound attenuation characteristics. The unique multi-directional fiber structure and high density effectively trap and dissipate sound waves reducing noise transmission into and out of the building.



Water Repellent

The structure and integrity of ROCKWOOL insulation are not affected by the presence of water. The product is water repellent, resisting the infiltration of water into the system. It is compatible with air/vapor barrier systems to provide an extra layer of protection against moisture and thermal transfer. The product is inorganic and therefore does not rot, corrode, or promote fungi, mold and bacterial growth.



ROXUL SAFE™ 55 & 65 Technical Data

Compliance and Performance

ASTM C612	Mineral Fiber Block and Board Thermal Insulation	Type IVB, Complies
-----------	--	--------------------

Fire Performance

CAN/ULC S411	Test for Non-Combustibility	Non-Combustible
--------------	-----------------------------	-----------------

CAN/ULC S102	Surface Burning Characteristics	Flame Spread = 0 Smoke Developed = 0
--------------	---------------------------------	---

Maximum Service Temperature

ASTM C411	Hot Surface Performance	In Compliance with ASTM C612 @ 1200°F (650°C)
-----------	-------------------------	--

Dimensional Stability

ASTM C356	Linear Shrinkage	<1% @ 1200°F (650°C)
-----------	------------------	----------------------

Moisture Resistance

ASTM C1104	Moisture Sorption	0.04%
------------	-------------------	-------

Thermal Resistance

ROXUL SAFE™ 65 ASTM C518 (C 177)	R-value/inch @75°F RSI value/25.4 mm @25°C	4.2 hf. ft². F/BTU 0.74 m²K/W
-------------------------------------	---	----------------------------------

ROXUL SAFE™ 55 ASTM C518 (C 177)	R-value/inch @75°F RSI value/25.4 mm @25°C	4.3 hf. ft². F/BTU 0.76 m²K/W
-------------------------------------	---	----------------------------------

Corrosive Resistance

ASTM C665	Corrosiveness to Steel	Pass
-----------	------------------------	------

ASTM C795	Stainless Steel Stress Corrosion Specification as per Test Methods C871 and C692: U.S. Nuclear Regulatory Commission, Reg. Guide #1.36: U.S. Military Specifications – 24244 (all versions including B and C)	Conforms
-----------	---	----------

Dimensions

24" W x 48" L (610 mm x 1219 mm) 31.5" W x 48" L (800 mm x 1219 mm) 32" W x 48" L (813 mm x 1219 mm)		
--	--	--

Thickness

ROXUL SAFE™ 65	3" (76 mm) Thickness	
ROXUL SAFE™ 55	4" (102 mm) Thickness	

ROCKWOOL PLUS™ MB Technical Data

Compliance and Performance

ASTM C553	Standard Specification for Mineral Fiber Blanket Thermal Insulation for Commercial and Industrial Applications	Type I, II, III
-----------	--	-----------------

Fire Performance

CAN/ULC S102	Surface Burning Characteristics	Flame Spread = 0 Smoke Developed = 0
--------------	---------------------------------	---

ASTM E84 (UL 723)	Surface Burning Characteristics	Flame Spread = 0 Smoke Developed = 0
-------------------	---------------------------------	---

CAN4-S114	Determination of Non-Combustibility	Non-Combustible
-----------	-------------------------------------	-----------------

Maximum Service Temperature

ASTM C411	Maximum Recommended Use Temperature	450°F (232°C)
-----------	-------------------------------------	---------------

Dimensional Stability

ASTM C356	Linear Shrinkage	0.74 % @ 450°F (232°C)
-----------	------------------	------------------------

Moisture Resistance

ASTM C1104	Water Vapor Sorption	0.028%
------------	----------------------	--------

Thermal Resistance

ASTM C518 (C177)	R-value/inch @ 75°F RSI value/25.4 mm @ 24°C	4.0 hf. ft². F/BTU 0.71 m²K/W
------------------	---	----------------------------------

Corrosive Resistance

ASTM C665	Corrosiveness to Steel	Pass
-----------	------------------------	------

ASTM C795	Stainless Steel Stress Corrosion Specification as per Test Methods C871 and C692: U.S. Nuclear Regulatory Commission, Reg. Guide #1.36: U.S. Military Specifications MIL-I-24244 (all versions including B and C)	Conforms
-----------	---	----------

Dimensions

24" W x 48" L (610 mm W x 1219 mm L)	Product thickness available in 2" through 4" in ½" increments as well as 5" and 6" offerings.	
---	---	--

Density

ASTM C612-00	2.0 lbs/sq.ft.3 32 kg/m3	
--------------	-----------------------------	--



At the ROCKWOOL Group, we are committed to enriching the lives of everyone who comes into contact with our solutions. Our expertise is perfectly suited to tackle many of today's biggest sustainability and development challenges, from energy consumption and noise pollution to fire resilience, water scarcity and flooding. Our range of products reflects the diversity of the world's needs, while supporting our stakeholders in reducing their own carbon footprint.

Stone wool is a versatile material and forms the basis of all our businesses. With more than 11,000 employees in 39 countries, we are the world leader in stone wool solutions, from building insulation to acoustic ceilings, external cladding systems to horticultural solutions, engineered fibres for industrial use to insulation for the process industry and marine and offshore.

AFB®, CAVITYROCK®, COMFORTBATT®, CONROCK®, CURTAINROCK®, ROCKBOARD®, TOPROCK®, MONOBOARD®, ROXUL® are registered trademarks of the ROCKWOOL Group in USA and ROXUL Inc. in Canada.

ROCKWOOL™, COMFORTBOARD™, FABROCK™, ROXUL SAFE™, ROCKWOOL PLUS™, and AFB evo™ are trademarks of the ROCKWOOL Group in USA and ROXUL Inc. in Canada.

SAFE'n'SOUND® is a registered trademark used under license by Masonite Inc.

Publication date - edition: 01/2018




ROCKWOOL
8024 Esquesing Line
Milton, ON L9T 6W3
Tel: 1 800 265 6878
rockwool.com

Return to Commercial Applications



ROXUL SAFE™ 55

Metal Building Insulation

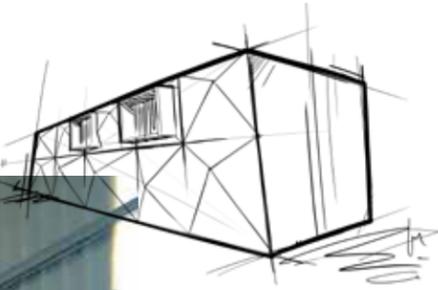

ROXUL SAFE™ 55

Metal Building Insulation

Technical Data Sheet
 Board Insulation 05080* • Board Insulation 07 21 13**
 Metal Wall Panels 07 42 13**

ROCKWOOL ROXUL SAFE™ 55 is a mineral wool insulation board approved for use in metal building assemblies where a 2-hour fire resistance rating is required from one side or both sides of the wall.

	Performance	Test Standard
Compliance	Mineral Fiber Block and Board Thermal Insulation - Type IVB Compliant	ASTM C612
Reaction to Fire	Flame spread index = 0; Smoke developed index = 0 Flame spread index = 0; Smoke developed index = 0 Determination of Non Combustibility of Building Materials - Non Combustible Test for Non-Combustibility - Non Combustible ULC 2 hr rated from interior side - W606 ULC 2 hr rated from both sides - W611 UL 2 hr rated from interior side - U655 UL 2 hr rated from both sides - U659 Consult UL and ULC Directories for fire rated designs	ASTM E84 (UL 723) CAN/ULC S102 CAN/ULC S114 ASTM E136
Density	Nominal Density, Minimum - 4.5 lbs/ft ³ (72 kg/m ³)	ASTM C303
Thermal Resistance	R-Value / inch @ 75°F 4.2 hr.ft ² .F/Btu RSI value / 25.4 mm @ 24°C 0.74 m ² /K/W	ASTM C518 (C177)
Dimensional Stability	Linear Shrinkage - <1% @ 1200°F	ASTM C356
Corrosion Resistance	Stress Corrosion Cracking Tendency of Austenitic Stainless Steel - Passed Corrosion of Steel - Passed	ASTM C795 ASTM C665
Reaction to Moisture	Moisture Sorption by weight - 0.04% Determination of Fungi Resistance - Passed	ASTM C1104 ASTM C1338
Thickness Dimensions	Product is available in 4" thickness (101.6 mm) 24" x 48" (610 mm x 1219 mm), 31.5" x 48" (800 mm x 1219 mm), 32" x 48" (813 mm x 1219 mm)	

Fire-resistant Material

A 2-hour fire resistance rating from the interior side allows builders to reduce the required separation between buildings.



ROCKWOOL ROXUL SAFE™ 55 is a medium-density stone wool insulation for exterior and interior non-load-bearing, steel-faced firewall applications where a fire resistance rating is required. It is approved for use in a 2-hour fire rated system.

Designed to meet building codes in high-density areas, ROXUL SAFE™ 55 is non-combustible, withstanding temperatures up to 2150°F (1177°C), and will not produce toxic smoke or promote flame spread. As a result, it provides high-temperature fire protection, enhancing occupant safety, particularly when a fire separation wall is required.

It is also UL/ULC tested and approved for fire-rated assemblies.

ROCKWOOL offers single- or double-sided fire-rated assemblies. ROXUL SAFE™ 55 is ideally suited for zero lot line applications where buildings are in close proximity and fire safety is essential.

Learn more at rockwool.com



Issued 01-01-18
 Supersedes 08-23-17

NOTE: *Master Format 1995 Edition **Master Format 2004 Edition. As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warranty the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.




8024 Esquesing Line, Milton, ON L9T 6W3
 Tel: 800-265-6878 • Fax: 800-991-0110
rockwool.com

Return to Commercial Applications



ROXUL SAFE™ 65

Metal Building Insulation

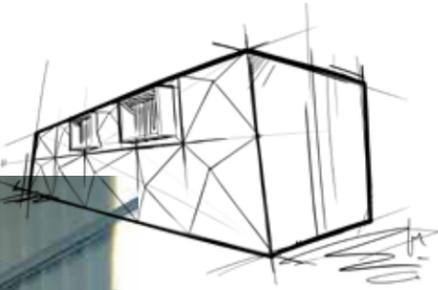

ROXUL SAFE™ 65

Metal Building Insulation

Technical Data Sheet
 Board Insulation 15080* • Board Insulation 07 21 013**
 Metal Wall Panels 07 42 13**

ROCKWOOL ROXUL SAFE™ 65 is a mineral wool insulation board approved for use in metal building assemblies where a 1-hour fire resistance rating is required from one side or both sides of the wall.

	Performance	Test Standard
Compliance	Mineral Fiber Block and Board Thermal Insulation - Type IVB Compliant	ASTM C612
Reaction to Fire	Flame spread index = 0; Smoke developed index = 0 Flame spread index = 0; Smoke developed index = 0 Determination of Non Combustibility of Building Materials - Non Combustible Test for Non-Combustibility - Non Combustible ULC 1 hr rated from interior side - W605 ULC 1 hr rated from both sides - W610 UL 1 hr rated from interior side - U654 UL 1 hr rated from both sides - U658 Consult UL and ULC Directories for fire rated designs	ASTM E84 (UL 723) CAN/ULC S102 CAN/ULC S114 ASTM E136
Density	Nominal Density, Minimum - 6.0 lbs/ft ³ (96 kg/m ³)	ASTM C303
Thermal Resistance	R-Value / inch @ 75°F 4.2 hr.ft ² .F/Btu RSI value / 25.4 mm @ 24°C 0.74 m ² K/W	ASTM C518 (C177)
Dimensional Stability	Linear Shrinkage - <1% @ 1200°F	ASTM C356
Corrosion Resistance	Stress Corrosion Cracking Tendency of Austenitic Stainless Steel - Passed Corrosion of Steel - Passed	ASTM C795 ASTM C665
Reaction to Moisture	Moisture Sorption by weight - 0.04% Determination of Fungi Resistance - Passed	ASTM C1104 ASTM C1338
Thickness Dimensions	Product is available in 3" thickness (76.2mm) 24" x 48" (610 mm x 1219 mm), 31.5" x 48" (800 mm x 1219 mm), 32" x 48" (813 mm x 1219 mm)	

Fire-resistant Material

A 1-hour fire resistance rating from the interior side allows builders to reduce the required separation between buildings.



ROCKWOOL ROXUL SAFE™ 65 is a medium-density stone wool insulation for exterior and interior non-load-bearing, steel-faced firewall applications where a fire resistance rating is required. It is approved for use in a 1-hour fire-rated system.

Designed to meet building codes in high-density areas, ROXUL SAFE™ 65 is non-combustible, withstanding temperatures up to 2150°F (1177°C), and will not produce toxic smoke or promote flame spread. As a result, it provides high-temperature fire protection, enhancing occupant safety, particularly when a fire separation wall is required.

It is also UL/ULC tested and approved for fire-rated assemblies.

ROCKWOOL offers single- or double-sided fire-rated assemblies. ROXUL SAFE™ 65 is ideally suited for zero lot line applications where buildings are in close proximity and fire safety is essential.

Learn more at rockwool.com



Issued 01-01-18
 Supersedes 08-23-17

NOTE: *Master Format 1995 Edition **Master Format 2004 Edition. As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warranty the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.




8024 Esquesing Line, Milton, ON L9T 6W3
 Tel: 800-265-6878 • Fax: 800-991-0110
rockwool.com

Return to Commercial Applications



ROCKWOOL PLUS™ MB

Pre-engineered Metal Building Insulation

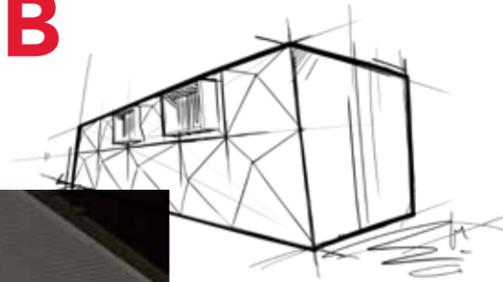

ROCKWOOL PLUS™ MB

Pre-engineered Metal Building Insulation

Technical Data Sheet
 Batt Insulation 07810 • Blanket Insulation 07 21 16**
 Metal Wall Panels 07 42 13**

ROCKWOOL PLUS™ MB is a mineral wool insulation batt designed for use in pre-engineered metal building constructions.

	Performance	Test Standard																																				
Compliance	Mineral Fiber Blanket Thermal Insulation, Type I, II and III	ASTM C553																																				
Reaction to Fire	Flame spread index = 0; Smoke developed index = 0 Flame spread index = 0; Smoke developed index = 0 Determination of Non Combustibility of Building Materials - Non Combustible Behaviour of materials at 750°C - Non Combustible	ASTM E84 (UL 723) CAN/ULC S102 CAN/ULC S114 ASTM E136																																				
Density	Actual Density - 2 lbs/ft ³ (32 kgs/m ³)	ASTM C303																																				
Thermal Resistance	R-Value / inch @ 75°F 4.0 hr.ft ² .F/Btu RSI value / 25.4 mm @ 24°C 0.70 m ² K/W	ASTM C518 (C177)																																				
Corrosion Resistance	Stress Corrosion Cracking Tendency of Austenitic Stainless Steel - Passed Corrosion of Steel - Passed	ASTM C795 ASTM C665																																				
Reaction to Moisture	Moisture Sorption - 0.03% Determination of Fungi Resistance - Passed	ASTM C1104 ASTM C1338																																				
Thickness Dimensions	2" through 4" (50.8 mm - 101.6 mm) in 1/2" increments as well as 5" (127 mm) and 6" (152.4 mm) 24" x 48" (610 mm x 1219 mm)																																					
Acoustical Performance	<table border="1"> <thead> <tr> <th>Thickness</th> <th>125 Hz</th> <th>250 Hz</th> <th>500 Hz</th> <th>1000 Hz</th> <th>2000Hz</th> <th>4000 Hz</th> <th>NRC</th> <th>ASTM C423</th> </tr> </thead> <tbody> <tr> <td>2.5"</td> <td>0.34</td> <td>0.76</td> <td>1.12</td> <td>1.05</td> <td>1.04</td> <td>1.04</td> <td>1</td> <td></td> </tr> <tr> <td>3.5"</td> <td>0.56</td> <td>0.99</td> <td>1.17</td> <td>1.04</td> <td>1.05</td> <td>1.05</td> <td>1.05</td> <td></td> </tr> <tr> <td>6"</td> <td>1.17</td> <td>1.2</td> <td>1.16</td> <td>1.08</td> <td>1.08</td> <td>1.07</td> <td>1.15</td> <td></td> </tr> </tbody> </table>	Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000Hz	4000 Hz	NRC	ASTM C423	2.5"	0.34	0.76	1.12	1.05	1.04	1.04	1		3.5"	0.56	0.99	1.17	1.04	1.05	1.05	1.05		6"	1.17	1.2	1.16	1.08	1.08	1.07	1.15		
Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000Hz	4000 Hz	NRC	ASTM C423																														
2.5"	0.34	0.76	1.12	1.05	1.04	1.04	1																															
3.5"	0.56	0.99	1.17	1.04	1.05	1.05	1.05																															
6"	1.17	1.2	1.16	1.08	1.08	1.07	1.15																															

Issued 01-01-18
 Supersedes 08-23-17

NOTE: *Master Format 1995 Edition **Master Format 2004 Edition. As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warranty the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.

Energy-saving Thermal Performance

Maintaining an R-value of R4, ROCKWOOL PLUS™ MB delivers consistent thermal performance, contributing to energy-efficient for pre-engineered metal building.



ROCKWOOL PLUS™ MB is a lightweight, semi-rigid mineral wool batt insulation designed for pre-engineered metal building construction where an hourly fire rating is not required.

It is non-combustible and fire resistant, and will not produce toxic smoke or promote flame spread. As a result, it provides high-temperature fire protection, particularly when a fire separation wall is required.

ROCKWOOL PLUS™ MB also helps to increase energy efficiency and improve thermal stability. Strong and durable onsite, it is easy to cut and install, and can contribute to earning LEED® points.

This product is recommended for installation on the interior side of a watertight metal cladding. It is not recommended for use in a rainscreen or cavity wall application where it may be exposed to the elements during construction or in situ.

Learn more at rockwool.com





Residential Applications

COMFORTBATT®

Thermal Batt Insulation Brochure

COMFORTBATT®

Technical Data Sheet

SAFE'n'SOUND®

Fire and Sound proofing Brochure

SAFE'n'SOUND®

Technical Data Sheet

ROXUL SAFE™ 45

Residential Party Wall
Technical Data Sheet

COMFORTBOARD™ 80

Technical Data Sheet Continuous Insulation



Click on any of the above brochures or data sheets to be directed to that specific document.

Visit www.rockwool.com for our full Product Documentation Library.



COMFORTBATT®

Thermal Batt Insulation for
Residential & Commercial Construction.



Superior building envelope performance by ROCKWOOL Insulation.



ROCKWOOL COMFORTBATT® is a semi-rigid batt insulation designed specifically for exterior wood and steel stud applications in residential and commercial construction. Made from natural stone and recycled slag, ROCKWOOL stone wool is a high-density insulation that will fit snugly into wall cavities and will not slump over time. It also adds superior acoustical performance to wall assemblies and floors and can be used in acoustic applications required by building code.



Fire-safe insulation for wall assemblies – won't burn or develop smoke

ROCKWOOL COMFORTBATT® stone wool insulation is non-combustible as determined by fire tests ASTM E 136 and CAN4-S114. It will not develop smoke or promote flame spread, even when directly exposed to fire, as most other insulation materials will.

- Extremely high melting point of 1177°C (2150°F)
- Does not produce smoke or toxic gases in the event of a fire
- Excellent barrier against the spread of flames to help protect occupants and reduce property damage
- Eliminates the risk of insulation accidentally catching fire during installation
- Excellent Passive Fire Protection – COMFORTBATT® can add up to an additional 15 minutes of fire protection to wall assemblies

Fire test performance		
CAN/ULC-S702-09	Mineral Wool Thermal Insulation for Buildings	Type 1, Complies
CAN4-S114	Determination of Non-Combustibility	Non-Combustible
ASTM E 136	Determination of Non-Combustibility	Non-Combustible
CAN/ULC S102	Surface Burning Characteristics	Flame Spread = 0 Smoke Developed = 0
ASTM E 84	Surface Burning Characteristics	Flame Spread = 0 Smoke Developed = 0
NBC 2010, Article 9.25.2.2	Insulation Materials	Conforms
CCMC Evaluation Listing	Master Format 07212: Mineral Wool Batt Insulation	12018-L



The Insurance Bureau of Canada (IBC) reference to NFPA 285: Standard Fire Test Method for Evaluation of Fire Propagation Characteristics of Exterior Non-Load-Bearing Wall Assemblies Containing Combustible Components has led to several rainscreen wall system manufacturers to test with ROCKWOOL cavity wall insulation. The use of Spray Polyurethane Foam insulation does not allow rainscreen manufacturers to meet this requirement.

Performance Matters.

Managing moisture in wall assemblies

Depending on your building codes and geographic location, a vapor barrier may be required when insulating exterior wall cavities. The use of a vapor retarder will limit the amount of water vapor that will move to the outside wall – reducing condensation in the wall assembly. ROCKWOOL COMFORTBATT® will not absorb or retain water in the event that moisture does get into the wall assembly.

When insulation material such as fiberglass gets wet, it can absorb moisture, reducing R-value, and will slump or sag within the wall cavity. This can also create the risk of mold growth in the insulation. COMFORTBATT® is made from inorganic stone and does not support mold or fungus growth, even when exposed to moisture. COMFORTBATT® is also vapor permeable, meaning that it will not absorb water but if it does get wet, it will dry out and maintain its R-value.

Better fit equals better wall performance

To ensure the labeled R-value is achieved, batt insulation in wood and steel stud wall cavities must be gap free and void free. Gaps and voids are most prevalent around electrical boxes, wires and pipes.

ROCKWOOL COMFORTBATT® is produced at a slight over-thickness to ensure a friction fit within the wall cavity. The batts will stay in place and perform equally well in horizontal, sloped, dormer, vertical and overhead applications.

ROCKWOOL COMFORTBATT®'s unique flexible edge ensures the semi-rigid batts compress and expand between studs and joists to eliminate slumping or sagging and conform to off-standard wood studs.

Higher-density batts reduce airflow within the wall cavity, reducing convective losses. This translates into a better-performing and more comfortable thermal wall.

Compliance & Specification · 2 lb/ft³ 32 kg/m³		
R14/15	89 mm	2.8 kg/m²
R22/23	150 mm	4.8 kg/m²
R28/30	184 mm	5.9 kg/m²
R32	203 mm	6.5 kg/m²
Density	ASTM C 612-00 – 32 kg/m³ (2 lb/ft³)	
Fire	CAN/ULC S102 Surface Burning Characteristics Flame Spread = 0 Smoke Developed = 0	
Moisture Resistance	ASTM C 1104 Moisture Sorption 0.03%	




Studies have proven that wall assemblies with gaps and voids can result in 35% loss of the stated R-value. ROCKWOOL COMFORTBATT®'s higher-density batts make it simple for precise cutting to ensure a fit without gaps and voids.

ROCKWOOL cuts quickly and accurately with a serrated knife, such as a bread knife, so you can easily achieve optimal fit around pipes, electrical boxes, wiring, ductwork and between studs and joists that are less than a standard width.



Determining your climate zone and building code requirements.

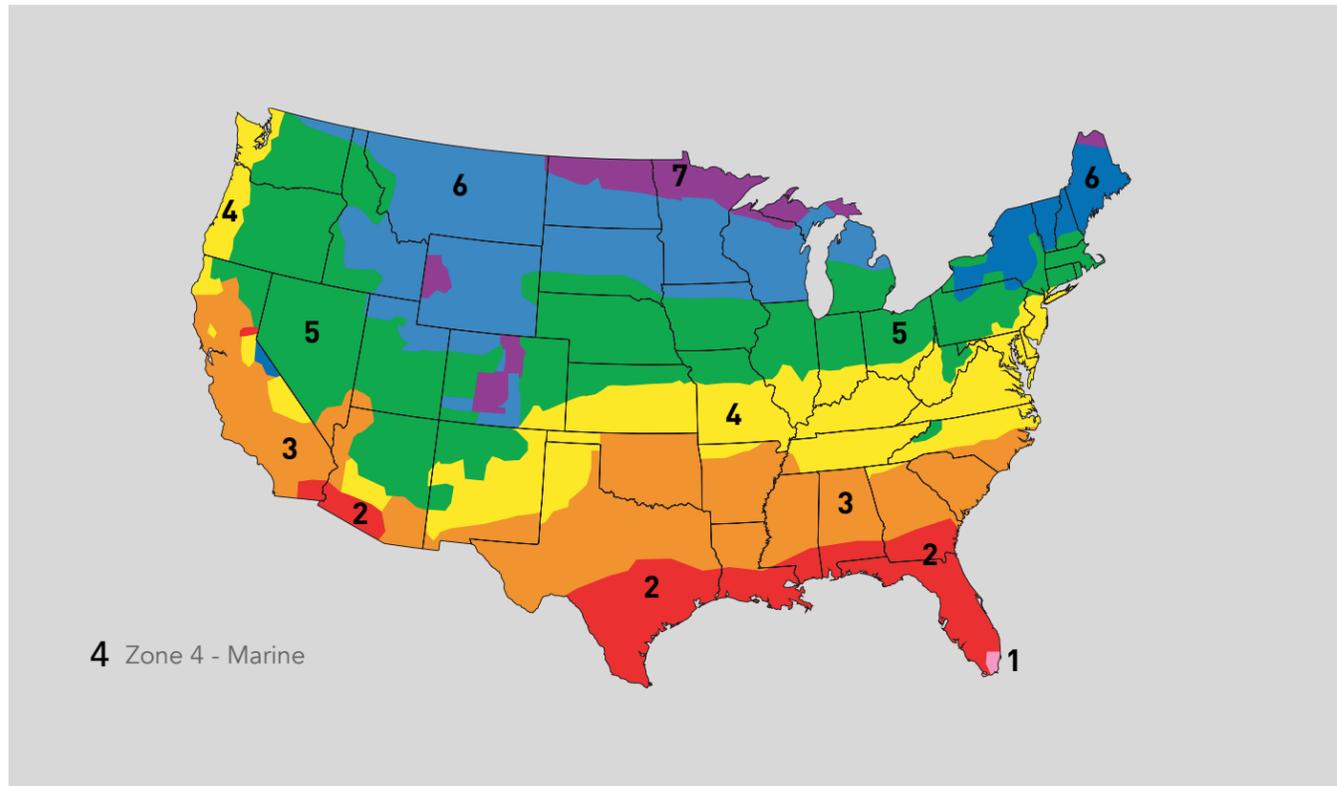

In the northern states and Canada, chances are that building code mandates a vapor control layer be installed on the warm side of the insulation. A vapor control layer in northern climates helps to reduce the moisture diffusion through the wall assembly and through to the drywall.

Vapor control layers and barriers have different permeance levels measured in perms and depending on your building code you may need to install a vapor control layer with a specific perm rating. In Canada and some northern US states, a 6 mil polyethylene sheet is commonly used, but always check with your local building code for guidance.

ASHRAE – history of R-value requirements

The American Society of Heating, Refrigerating and Air Conditioning Engineers (ASHRAE) is an international society of technical individuals who provide knowledge to the building industry on heating, ventilation, air conditioning, and refrigeration (HVAC&R). The Society developed ASHRAE 90.1, an energy conservation

standard that provides the minimum requirements for energy-efficient buildings.


This standard, or an equivalent, is applied today in many states for commercial, government and high-rise building applications. In Canada, look to the National Building Code and refer to section A-5.3.1.2 for information on condensation and energy conservation standards.

ASHRAE map of climate zones (above)

Every rating agency has its own maps that divide regions into thermal or climate zones to tailor codes and standards to what is appropriate for that particular region.

In Zone 1, Zone 2, Zone 3 and Zone 4 (except Zone 4 Marine), no vapor retarder is required on the interior surface of insulated wall and floor assemblies while in the northern states, some form of vapor retarder is likely code mandatory.

Specifically engineered for use in all residential thermal applications.

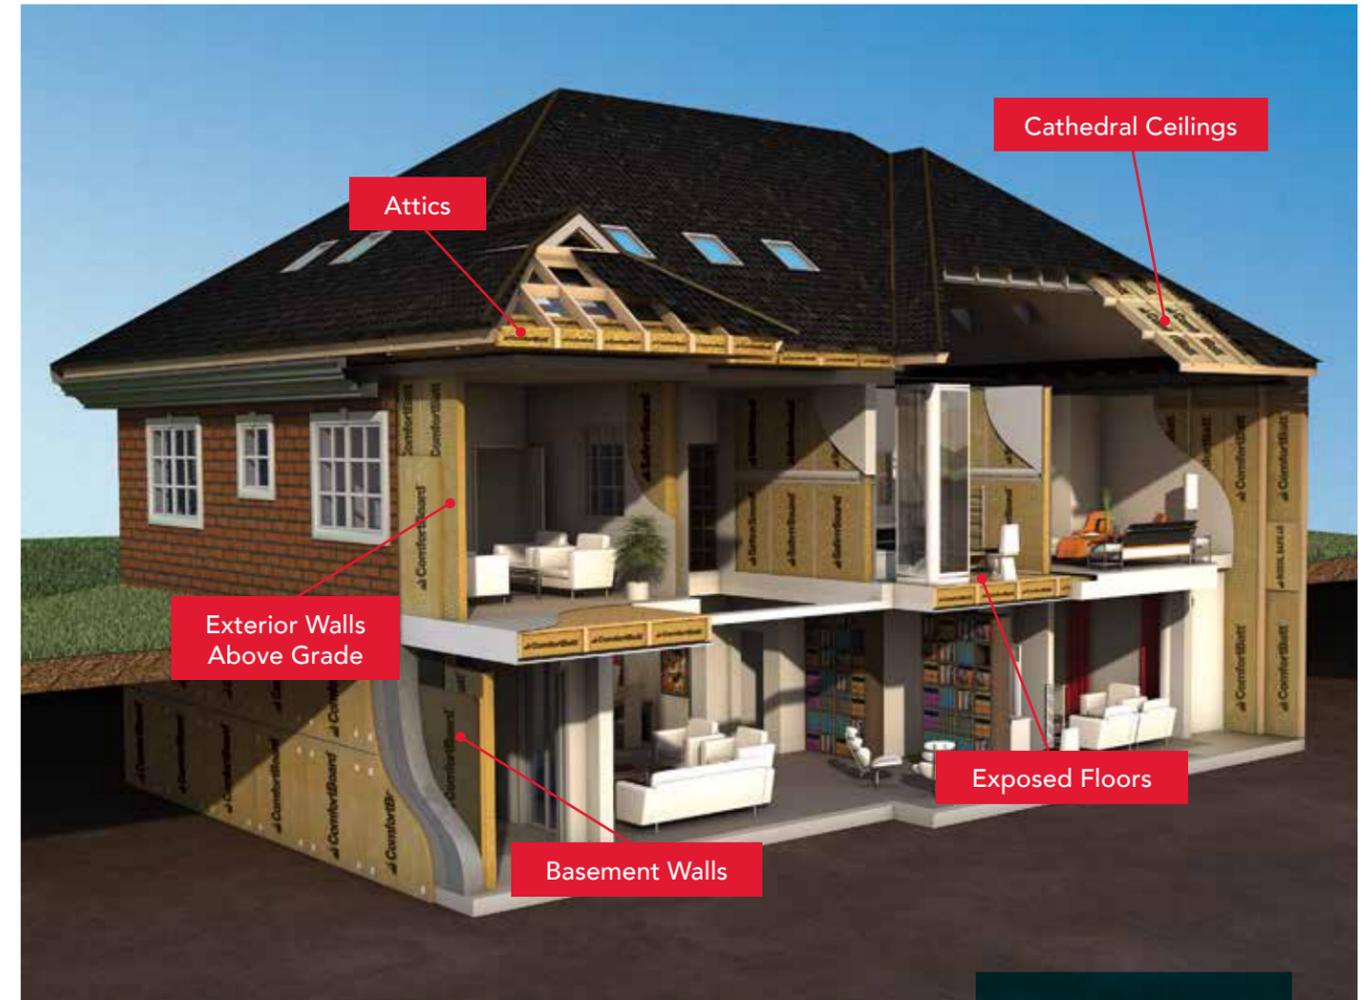

Environmental Benefits That Go Beyond Residential Homes

The GREENGUARD® Environmental Institute (GEI) is a non-profit organization that oversees the GREENGUARD Gold standards. The GEI's mission is to protect human health and quality of life through programs that improve indoor air that people breathe. GREENGUARD Gold Certification (formerly known as GREENGUARD Children & Schools Certification) offers stricter certification criteria, considering safety factors to account for sensitive individuals (such as children and the elderly), and ensures that a product is acceptable for use in environments such as schools and healthcare facilities. ROCKWOOL COMFORTBATT® products are certified to this standard and are recognized by the United States Green Building Council's (USGBC) LEED® program.




Ideal applications for COMFORTBATT® insulation.

The higher density of ROCKWOOL COMFORTBATT® ensures a snug friction fit in the wall cavity. Note: A vapor retarder may be required in the wall assembly, depending on the geographical location of the building.

The COMFORTBATT® Residential Wall Assembly

(shown from outside to inside)

- 1 Cladding
- 2 Air Barrier
- 3 Sheathing
- 4 2" x 6" Wood Studs
- 5 5.5" COMFORTBATT®
- 6 Vapor Retarder*
- 7 Gypsum

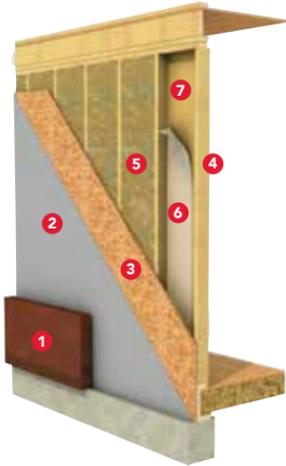


In addition to residential applications, ROCKWOOL COMFORTBATT® is ideal as a component of the BEDR™ cavity wall system.

BEDR Wall Components

(shown from outside to inside)

- 1 Terra Cotta Cladding
- 2 1" Air Space (1/2" minimum)
- 3 1"-2" CAVITYROCK® MD Insulation (R4.2–R8.4) or 2.5"–5" CAVITYROCK® DD (R10.75–R21.5)
- 4 Permeable Air Barrier
- 5 Exterior Gypsum Board
- 6 3.5" or 6" Steel Stud
- 7 3.5" or 6" COMFORTBATT® Insulation
- 8 Vapor Barrier*
- 9 5/8" Gypsum Board

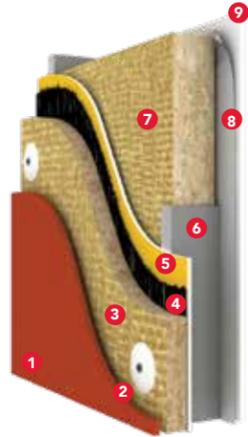


When insulating attics, use two layers of COMFORTBATT® to achieve the required R-value. The bottom layer should run parallel to the joists and the top layer run in the opposite direction. For attics and cathedral ceilings, only a single layer of COMFORTBATT® is required between the roof trusses.

The COMFORTBATT® Roof/Attic Assembly

(shown from outside to inside)

- 1 Shingles
- 2 Tar Paper
- 3 Sheathing
- 4 2" x 10" Roof Trusses
- 5 COMFORTBATT® (R30/R32)
- 6 Ceiling Joists
- 7 COMFORTBATT® (R22/R23 or R28/R30) two layers running perpendicular

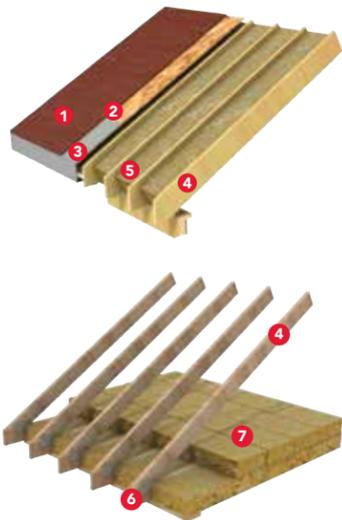

*Check with your local building code for approved vapor barrier/retarder information.

A range of COMFORTBATT® products to suit all your building requirements.

R-Value	Available in Canada	Available in US	RSI Value	Stud/Joist Type	Thickness	Width	Length	Coverage Sq. Ft. (per bag)
Wood Stud								
R14	✓	✗	2.47	Wood	3.5"	15.25"	47"	59.7
R14	✓	✗	2.47	Wood	3.5"	23"	47"	60.1
R15	✗	✓	2.64	Wood	3.5"	15.25"	47"	59.7
R15	✗	✓	2.64	Wood	3.5"	23"	47"	60.1
R22	✓	✗	3.87	Wood	5.5"	15.25"	47"	39.8
R22	✓	✗	3.87	Wood	5.5"	23"	47"	37.5
R23	✗	✓	4.05	Wood	5.5"	15.25"	47"	39.8
R23	✗	✓	4.05	Wood	5.5"	23"	47"	37.5
R24	✓	✗	3.87	Wood	5.5"	15"	47"	29.4
R24	✓	✗	3.87	Wood	5.5"	22.75"	47"	29.7
R28	✓	✗	4.92	Wood	7.25"	15.25"	47"	29.9
R28	✓	✗	4.92	Wood	7.25"	23"	47"	30.7
R30	✗	✓	5.28	Wood	7.25"	15.25"	47"	29.9
R30	✗	✓	5.28	Wood	7.25"	23"	47"	30.7
R32	✓	✗	5.64	Wood	8"	15.25"	47"	29.9
R32	✓	✗	5.64	Wood	8"	23"	47"	30.0
Steel Stud								
R10	✓	✓	1.76	Steel	2.5"	16.25"	48"	86.7
R14	✓	✗	2.47	Steel	3.5"	16.25"	48"	65.0
R14	✓	✗	2.47	Steel	3.5"	24.25"	48"	64.7
R15	✗	✓	2.64	Steel	3.5"	16.25"	48"	65
R15	✗	✓	2.64	Steel	3.5"	24.25"	48"	64.7
R22.5	✓	✓	3.96	Steel	6.0"	16.25"	48"	43.3
R22.5	✓	✓	3.96	Steel	6.0"	24.25"	48"	40.4
R24	✓	✓	4.22	Steel	6.0"	16.25"	48"	43.3
R24	✓	✓	4.22	Steel	6.0"	24.25"	48"	40.4



At the ROCKWOOL Group, we are committed to enriching the lives of everyone who comes into contact with our solutions. Our expertise is perfectly suited to tackle many of today's biggest sustainability and development challenges, from energy consumption and noise pollution to fire resilience, water scarcity and flooding. Our range of products reflects the diversity of the world's needs, while supporting our stakeholders in reducing their own carbon footprint.

Stone wool is a versatile material and forms the basis of all our businesses. With approx. 10,500 passionate colleagues in 38 countries, we are the world leader in stone wool solutions, from building insulation to acoustic ceilings, external cladding systems to horticultural solutions, engineered fibres for industrial use to insulation for the process industry and marine & offshore.

AFB®, CAVITYROCK®, COMFORTBATT®, CONROCK®, CURTAINROCK®, ROCKBOARD®, TOPROCK®, MONOBOARD®, ROXUL® are registered trademarks of the ROCKWOOL Group in USA and ROXUL Inc. in Canada.

ROCKWOOL™, COMFORTBOARD™, FABROCK™, ROXUL SAFE™, ROCKWOOL PLUS™, and AFB evo™ are trademarks of the ROCKWOOL Group in USA and ROXUL Inc. in Canada.

SAFE'n'SOUND® is a registered trademark used under license by Masonite Inc.

Publication date - edition: 12/2017




ROCKWOOL
8024 Esquesing Line
Milton, ON L9T 6W3
Tel: 1 800 265 6878
rockwool.com

Return to Residential Applications




COMFORTBATT®

Thermal Batt Insulation

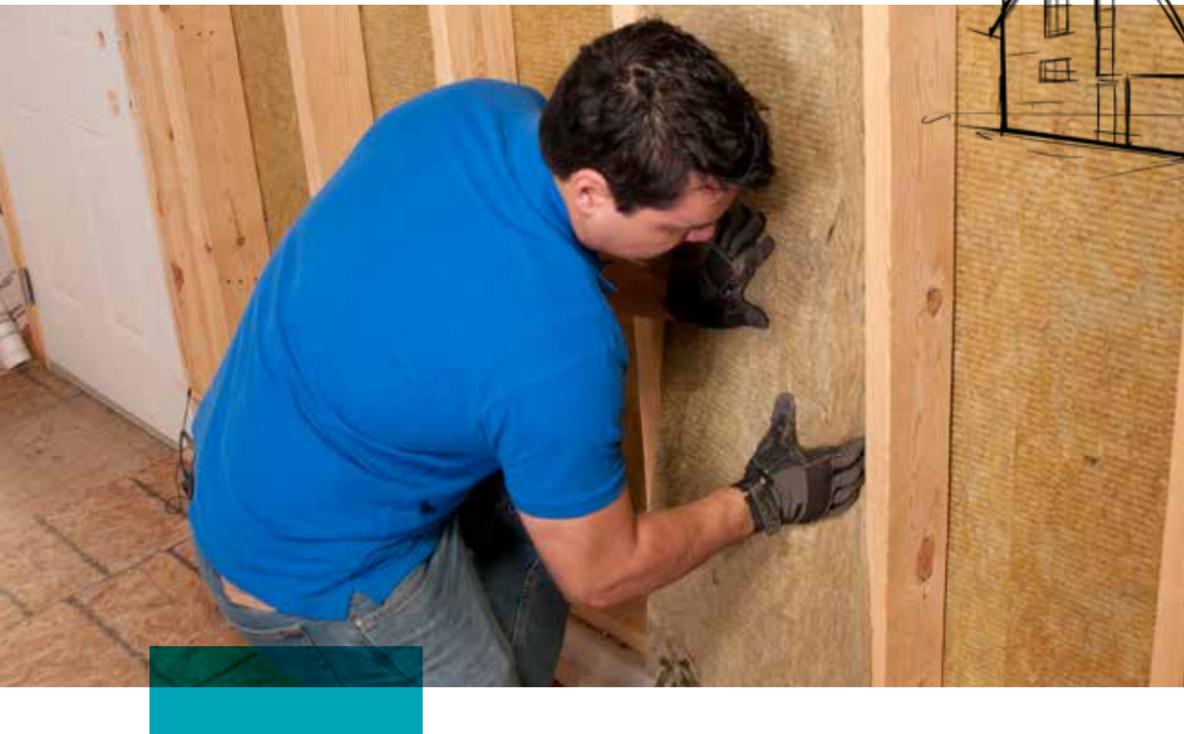

Easy Fit

Easily cut to achieve an optimal fit around pipes, electrical wiring boxes, ductwork and between studs and joists that are less than standard width.

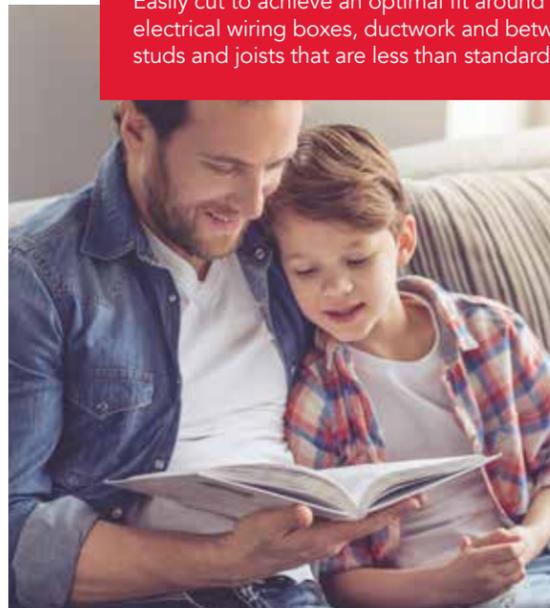

ROCKWOOL COMFORTBATT® is a semi-rigid stone wool batt insulation for exterior wood and steel stud applications in both new construction and renovations.

It features a unique flexible edge designed to compress as the batt is inserted then spring back, expanding the batt against the frame studs to give a complete fill. This flexibility ensures the expected R-value is achieved and maintained.

Non-combustible and fire resistant, COMFORTBATT® will not develop toxic smoke or promote flame spread, even when exposed directly to a fire. It also offers water and moisture resistance and excellent sound absorbency.

COMFORTBATT® is an effective way to improve a home's energy efficiency. It is GREENGUARD Gold Certified and contributes to a healthier indoor environment.

Learn more at rockwool.com

COMFORTBATT®

Thermal Batt Insulation

Technical Data Sheet

Batt Insulation 07210*

Blanket Insulation 07 21 16**

ROCKWOOL COMFORTBATT® is a mineral wool batt insulation designed for thermal resistance in wood and steel framing.

	Performance	Test Standard	
Compliance	Mineral Fibre Thermal Insulation for Buildings, Type 1 Compliant	CAN/ULC S702	
Reaction to Fire	Flame spread index = 0; Smoke developed index = 0 Determination of Non-combustibility of Building Materials - Non-combustible	CAN/ULC S102 CAN/ULC S114	
Density	> 2 lbs/ft³ (>32 kg/m³)	ASTM C167	
Thermal Resistance	Wood Stud	Steel Stud	ASTM C518
	R14 (RSI 2.47) - 3.5" thick (89 mm)	R10 (RSI 1.76) - 2.5" thick (64 mm)	
	R22 (RSI 3.87) - 5.5" thick (140 mm)	R14 (RSI 2.47) - 3.5" thick (89 mm)	
	R24 (RSI 4.23) - 5.5" thick (140 mm)	R22.5 (RSI 3.96) - 6" thick (152 mm)	
	R28 (RSI 4.93) - 7.25" thick (184 mm)	R24 (RSI 4.23) - 6" thick (152 mm)	
	R32 (RSI 5.64) - 8" thick (203 mm)		

Dimensions

Wood Stud 16" (406 mm) on centre: 15.25" x 47" (387 mm x 1194 mm)
 Wood Stud 24" (610 mm) on centre: 23" x 47" (584 mm x 1194 mm)
 Steel Stud 16" (406 mm) on centre: 16.25" x 48" (413 mm x 1219 mm)
 Steel Stud 24" (610 mm) on centre: 24.25" x 48" (616 mm x 1219 mm)



Issued 01-01-18
Supersedes 08-23-17

NOTE: *Master Format 1995 Edition **Master Format 2004 Edition. As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warranty the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.



SAFE'N'SOUND®

Fire and Soundproofing Insulation
for Interior Partition Walls and Floors.





Sound control and fire safety from one batt Insulation.

ROCKWOOL SAFE'n'SOUND® is a batt insulation designed specifically for interior wall and floor/ceiling applications. This stone wool insulation is made from natural stone and recycled content. It's a green product that provides superior sound absorbency and fire protection for overall comfort and safety.

Because SAFE'n'SOUND® is designed for interior applications, it has not been engineered as a thermal insulation but as a fire barrier and for soundproofing. Stone wool in general has excellent fire ratings, does not burn and can add valuable time for evacuation in the event that a fire occurs. Its higher density properties also make it an ideal solution for minimizing sound traveling between rooms.

Water repellent & won't sustain mold

- ROCKWOOL SAFE'n'SOUND® is resistant to water, rot, mold, mildew and bacterial growth
- Contributes to a safer and healthier indoor environment
- GREENGUARD® certified, receiving the highest designation for indoor air quality



Fire resistance enhances home safety

- Combination of natural stone and recycled content makes ROCKWOOL insulation an excellent fire barrier
- Does not develop smoke or promote flame spread, even when directly exposed to fire
- Can withstand temperatures up to 1177°C (2150°F) providing occupants valuable extra time in case of a fire



Higher density means a better fit

- ROCKWOOL SAFE'n'SOUND® Batts are simple to cut with a serrated knife (such as a bread knife)
- Clean, straight cuts provide optimal fit around electrical boxes, wiring, and pipes – minimizing air flow
- Superior friction fit between studs completely fills the wall cavity preventing insulation from sagging – unlike competitors' products



ROCKWOOL SAFE'n'SOUND® is an excellent acoustic barrier that effectively absorbs sound, making it the choice of professional recording studios.



Typical Assemblies for ROCKWOOL SAFE'n'SOUND®.

Top View



Single stud interior wall

(Wood Studs – 16" On Center)

Using ROCKWOOL SAFE'n'SOUND®, 5/8" drywall (type x) and resilient channels at 16" provides:


- Fire Rating: 1 hour
- Sound Transmission Class (STC): 45

SAFE'n'SOUND® Wall Components

(shown from outside to inside)

1. 5/8" Type X Gypsum
2. 3" SAFE'n'SOUND®
3. Resilient Channel
4. 5/8" Type X Gypsum Board

Side View

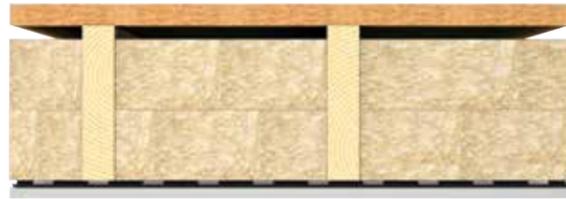

Interior ceiling/floor

(2 x 10 Joists – 16" On Center)

Using ROCKWOOL SAFE'n'SOUND®, 5/8" drywall (type x) and resilient channels at 24" provides:

- Fire Rating: 30 minutes
- Sound Transmission Class (STC): 50

SAFE'n'SOUND® Ceiling/Floor Components

(shown from top to bottom)

1. Plywood Floor
2. Air Space
3. Two layers of SAFE'n'SOUND®
4. Resilient Channel
5. Gypsum Board



Sound control delivers peace and quiet

- Install SAFE'n'SOUND® in interior walls between rooms and in ceilings between floors
- Provides higher sound absorption against low-frequency (bass) ranges, which are most difficult to block
- Higher-density batts more effectively reduce airflow – thereby decreasing sound transmission
- Typical household applications include home theater, basements (ceilings), home office, laundry room, bathroom and furnace room



Because it doesn't burn, SAFE'n'SOUND® can delay the spread of fire for added safety.



The SAFE'n'SOUND® interior partition wall and floor system is ideal for residential renovation activity such as media rooms.



Specify ROCKWOOL SAFE'n'SOUND® for every home.

Home life has changed, and sound dampening is more important than ever

Life is getting louder around the home. Televisions, home theaters, computers and video games blare from almost every room. Family cell phones constantly ring. More people work from home offices and entertainment rooms are the norm.

More and more, sound dampening is a must-have requirement for any modern family home. And, it's an ideal revenue-generating opportunity to offer ROCKWOOL SAFE'n'SOUND® – the premium acoustic insulation for interior walls and for ceilings between floors.

Satisfy your customers by creating a quieter home

Don't wait for your home buyers to ask about ways to make their homes quieter, safer and more comfortable. Make peace and quiet and fire protection available on every new build with ROCKWOOL SAFE'n'SOUND®.

Unlike other insulation, ROCKWOOL SAFE'n'SOUND® provides higher sound absorption against low-frequency (bass) ranges.



ROCKWOOL SAFE'n'SOUND® & GREENGUARD® Gold

The GREENGUARD Environmental Institute (GEI) is a non-profit organization that oversees the GREENGUARD Gold standards. The GEI's mission is to protect human health and quality of life through programs that improve indoor air that people breathe. Greenguard Gold Certification (formerly known as Greenguard Children & Schools Certification) offers stricter certification criteria, considering safety factors to account for sensitive individuals (such as children and the elderly), and ensures that a product is acceptable for use in environments such as schools and healthcare facilities. ROCKWOOL SAFE'n'SOUND® products are certified to this standard and are recognized by the United States Green Building Council's (USGBC) LEED® program.

Compliance and performance

System Description	Sound Transmission Class (STC)	Fire Resistance
5/8" gypsum boards 3 5/8" steel studs spaced 24" centers ROCKWOOL SAFE'n'SOUND®	52	1 Hour

Above results are based upon testing using Type X gypsum board. For additional designs, please contact ROCKWOOL Technical Services.

Acoustical performance

ASTM C423

CO-EFFICIENTS AT FREQUENCIES

System Description	Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
ROCKWOOL SAFE'n'SOUND®	3"	0.52	0.96	1.18	1.07	1.05	1.05	1.05

Compliance and performance

CAN/ULC-S702-09	Mineral Fiber Thermal Insulation for Buildings	Type 1, Complies
ASTM C 665	Mineral Fiber Blanket Thermal Insulation	Type 1, Complies
CAN4-S114	Determination of Non-Combustibility	Non-Combustible
ASTM E 136	Surface Burning Characteristics	Non-Combustible
CAN/ULC S102	Surface Burning Characteristics	Flame Spread = 0 Smoke Developed = 0
ASTM E 84 (UL 723)	Surface Burning Characteristics	Flame Spread = 0 Smoke Developed = 0
CAN/ULC S102	Smolder Resistance	0.09%

Dimensions

Steel Stud	Wood Stud
3" x 16.25" x 48" 76 mm x 413 mm x 1219 mm With flexible edges	3" x 15.25" x 47" 76 mm x 387 mm x 1194 mm With flexible edges
3" x 24.25" x 48" 76 mm x 616 mm x 1219 mm With flexible edges	3" x 23" x 47" 76 mm x 584 mm x 1194 mm With flexible edges

Density

2.5 lbs/ft ³	40 kg/m ³
-------------------------	----------------------

ROCKWOOL leads the way with sustainable, eco-friendly products in the building industry and contains natural, inorganic materials made with recycled content.



At the ROCKWOOL Group, we are committed to enriching the lives of everyone who comes into contact with our solutions. Our expertise is perfectly suited to tackle many of today's biggest sustainability and development challenges, from energy consumption and noise pollution to fire resilience, water scarcity and flooding. Our range of products reflects the diversity of the world's needs, while supporting our stakeholders in reducing their own carbon footprint.

Stone wool is a versatile material and forms the basis of all our businesses. With more than 11,000 employees in 39 countries, we are the world leader in stone wool solutions, from building insulation to acoustic ceilings, external cladding systems to horticultural solutions, engineered fibres for industrial use to insulation for the process industry and marine and offshore.

AFB®, CAVITYROCK®, COMFORTBATT®, CONROCK®, CURTAINROCK®, ROCKBOARD®, TOPROCK®, MONOBOARD®, ROXUL® are registered trademarks of the ROCKWOOL Group in USA and ROXUL Inc. in Canada.

ROCKWOOL™, COMFORTBOARD™, FABROCK™, ROXUL SAFE™, ROCKWOOL PLUS™, and AFB evo™ are trademarks of the ROCKWOOL Group in USA and ROXUL Inc. in Canada.

SAFE'n'SOUND® is a registered trademark used under license by Masonite Inc.

Publication date - edition: 01/2018




ROCKWOOL
8024 Esquesing Line
Milton, ON L9T 6W3
Tel: 1 800 265 6878
rockwool.com

Return to Residential Applications



SAFE'N'SOUND®

Fire and Soundproofing Insulation



A Quiet Space
A high density and unique fiber structure absorbs sound and reduces noise traveling from one room to another, improving occupant comfort.



ROCKWOOL SAFE'N'SOUND® is a stone wool insulation for use in interior partitions of residential wood and steel stud construction where superior fire resistance and acoustical performance are required.

Withstanding temperatures up to 2150°F (1177°C), SAFE'N'SOUND® is non-combustible and will not produce toxic smoke or promote flames spreading, even when directly exposed to fire. This adds valuable extra time for people to reach safety and for fire services personnel to arrive.

SAFE'N'SOUND® has excellent acoustical dampening properties and provides an easy friction fit into walls, ceiling and floor applications. It is GREENGUARD Gold Certified and contributes to a healthier indoor environment.

Learn more at rockwool.com

SAFE'N'SOUND®

Residential Fire and Soundproofing Insulation

Technical Data Sheet

Batt Insulation 07210 & 09820*
Acoustic Blanket Insulation 09 81 16**

ROCKWOOL SAFE'N'SOUND® is a mineral wool batt insulation for interior partitions of wood and steel frame construction where superior fire resistance and acoustical performance is required.

	Performance	Test Standard
Compliance	Mineral Fiber Blanket Thermal Insulation, Type 1 Compliant	ASTM C665
	Mineral Fiber Thermal Insulation for Buildings, Type 1 Compliant	CAN/ULC S702
Reaction to Fire	Flame spread index = 0; Smoke developed index = 0	ASTM E84 (UL 723)
	Flame spread index = 0; Smoke developed index = 0	CAN/ULC S102
	Determination of Non-combustibility of Building Materials - Non-combustible	CAN/ULC S114
	Behavior of materials at 750°C - Non-combustible	ASTM E136
	Smolder Resistance - 0.09%	CAN/ULC S129
Density	Actual Density - 2.5 lb/ft³ (40 kg/m³)	ASTM C167
Thickness	Product is available in 3" thickness (76.2 mm)	
Dimensions	Wood Stud 16" (406 mm) on center: 15.25" x 47" (387 mm x 1194 mm) Wood Stud 24" (610 mm) on center: 23" x 47" (584 mm x 1194 mm) Steel Stud 16" (406 mm) on center: 16.25" x 48" (413 mm x 1219 mm) Steel Stud 24" (610 mm) on center: 24.25" x 48" (616 mm x 1219 mm)	

	System Description	Sound Transmission Class (STC)	Fire Resistance
System Testing	5/8" gypsum boards (type x) 3 5/8" steel studs spaced 24" OC SAFE'N'SOUND® Steel Stud	52	1 hour
	5/8" gypsum boards (type x) 2x4" wood studs spaced 16" OC SAFE'N'SOUND® Wood Stud Resilient Channels spaced 16" OC	45	1 hour (non-loadbearing) 45 min (loadbearing)
	2x10" Wood Joists spaced 16" OC 2 layers SAFE'N'SOUND® Wood Stud Resilient Channels spaced 24" OC 5/8" gypsum boards (type x)	50	30 minutes

Acoustical Performance	Thickness	Frequency (Hz)							NRC	ASTM C423
		125	250	500	1000	2000	4000			
	3"	0.52	0.96	1.18	1.07	1.05	1.05	1.05		



Issued 01-01-18
Supersedes 08-23-17

NOTE: *Master Format 1995 Edition **Master Format 2004 Edition. As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warranty the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.



8024 Esquesing Line, Milton, ON L9T 6W3
Tel: 800-265-6878 • Fax: 800-991-0110
rockwool.com

Return to Residential Applications



ROXUL SAFE™ 45

Residential Party Wall Insulation



ROXUL SAFE™ 45

Residential Party Wall Insulation

Technical Data Sheet
Board Insulation 07210*
Board Insulation 07 21 13**

ROXUL SAFE™ 45 is a semi-rigid, mineral wool insulation board designed for firestopping in concealed spaces of residential units. This product complies with the 2010 National Building Code 9.10.16.3(2).

	Performance	Test Standard	
Compliance	Mineral Fiber Block and Board Thermal Insulation - Type IVA Compliant Mineral Fiber Thermal Insulation for Buildings - Type 1 Compliant	ASTM C612 CAN/ULC S702	
Reaction to Fire	Flame spread index = 0; Smoke developed index = 0 Flame spread index = 0; Smoke developed index = 0 Determination of Non-combustibility of Building Materials - Non-combustible Behavior of materials at 750°C - Non-combustible	ASTM E84 (UL 723) CAN/ULC S102 CAN/ULC S114 ASTM E136	
Density	Actual Density - 4.4 lbs/ft ³ (70 kg/m ³)	ASTM C303	
Dimensional Stability	Linear Shrinkage - <1% @ 1200°F	ASTM C356	
Corrosion Resistance	Stress Corrosion Cracking Tendency of Austenitic Stainless Steel - Passed Corrosion of Steel - Passed	ASTM C795 ASTM C665	
Thermal Resistance	R-Value / inch @ 75°F RSI value / 25.4 mm @ 24°C	4.2 hr.ft ² .F/Btu 0.74 m ² K/W	ASTM C518 (C177)
Reaction to Moisture	Moisture Sorption by weight - 0.03% Determination of Fungi Resistance - Passed	ASTM C1104 ASTM C1338	
Thickness Dimensions	Product is available in 1" thickness (25.4 mm) 16" x 48" (406 mm x 1219 mm), 24" x 48" (610 mm x 1219 mm)		

Issued 01-01-18
Supersedes 08-23-17

NOTE: *Master Format 1995 Edition **Master Format 2004 Edition. As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warranty the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.

ROXUL SAFE™ 45 is a semi-rigid stone wool insulation board from ROCKWOOL that is specifically engineered as a fire-blocking material for concealed spaces of multi-unit residential buildings.

Using ROXUL SAFE™ 45 with our ROCKWOOL batt insulation creates a high-density "party" wall system that improves sound dampening and fire performance. It also reduces the time, labor and material costs usually associated with adding a double layer of gypsum over the wall studs.


With this party wall system in place, required performance specs exceed code while vibration and sound transmission between party walls is reduced.

ROXUL SAFE™ 45 fire separation board complies with the fire-blocking National Building Code, is easy to install, and offers excellent water and moisture resistance.

Learn more at rockwool.com

Party Wall System Advantage

Reduces time, labor and material costs on party wall stud partitions and increases occupant comfort.

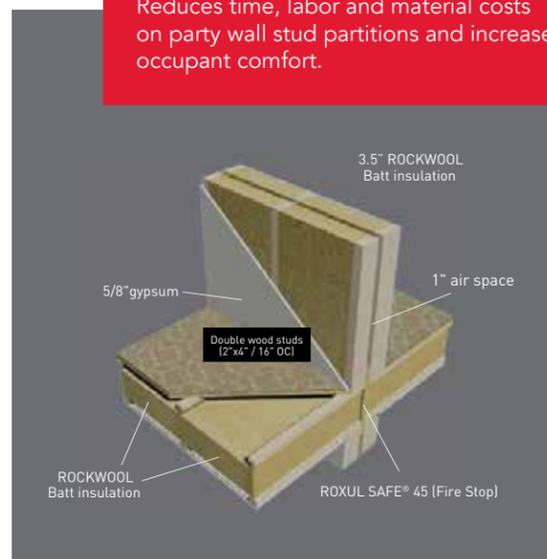

8024 Esquesing Line, Milton, ON L9T 6W3
Tel: 800-265-6878 • Fax: 800-991-0110
rockwool.com

Return to Residential Applications



COMFORTBOARD™ 80

Continuous Insulation



COMFORTBOARD™ 80

Continuous Insulation

Technical Data Sheet

Board Insulation 07210*

Board Insulation 07 21 13**

ROCKWOOL COMFORTBOARD™ 80 is a rigid mineral wool, non-structural insulated sheathing board used as continuous insulation in high-performance wall systems.

	Performance	Test Standard	
Compliance	Mineral Fiber Block and Board Thermal Insulation - Type IVB Compliant Mineral Fiber Thermal Insulation for Buildings - Type 1 Compliant	ASTM C612 CAN/ULC S702	
Reaction to Fire	Flame spread index = 0; Smoke developed index = 0 Flame spread index = 0; Smoke developed index = 0 Determination of Non-combustibility of Building Materials - Non-combustible	ASTM E84 (UL 723) CAN/ULC S102 CAN/ULC S114	
Density	Actual Density - 8 lbs/ft ³ (128 kg/m ³)	ASTM C303	
Corrosion Resistance	Stress Corrosion Cracking Tendency of Austenitic Stainless Steel - Passed Corrosion of Steel - Passed	ASTM C795 ASTM C665	
Thermal Resistance	R-Value / inch @ 75°F RSI value / 25.4 mm @ 24°C	4 hr.ft ² .F/Btu 0.70 m ² K/W	ASTM C518 (C177)
Reaction to Moisture	Moisture Sorption - 0.05% Water Vapor Transmission, Desiccant Method - 1768ng/Pa.s.m ² (31 perm) Determination of Fungi Resistance - Passed	ASTM C1104 ASTM E96 ASTM C1338	
Compressive Strength	439psf (21kPa) @ 10% compression 1065psf (50kPa) @ 25% compression	ASTM C165	
Thickness Dimensions	1.25" (31.8 mm), 1.5" (38.1 mm), 2" (50.8 mm), 2.5" (63.5 mm), 3" (76.2 mm) 24" x 48" (610 x 1219 mm), 36" x 48" (914 x 1219 mm), 48" x 72" (1219 x 1829 mm), 48" x 96" (1219 x 2438 mm)		

Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000Hz	4000 Hz	NRC	ASTM C423
1.5"	0.21	0.64	0.92	1	0.95	1.01	0.9	
2"	0.43	0.78	0.9	0.97	0.97	1	0.9	
3"	0.75	0.82	0.89	0.94	1	1	0.9	

Acoustical Performance



Please contact ROCKWOOL for Declare labels for other ROCKWOOL manufacturing facilities.

Issued 01-01-18
Supersedes 08-23-17

NOTE: *Master Format 1995 Edition **Master Format 2004 Edition. As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warranty the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.

Reduce Thermal Bridging

COMFORTBOARD™ 80 helps reduce thermal bridging through wood framing, leading to a higher-performing building envelope.



ROCKWOOL COMFORTBOARD™ 80 is a rigid stone wool continuous insulation board used as a non-structural sheathing product in residential construction.

It is designed to provide increased thermal performance to the building envelope. Installing COMFORTBOARD™ 80 as continuous insulation with our ROCKWOOL COMFORTBATT® as the wall cavity insulation contributes to a higher effective R-value wall system.

COMFORTBOARD™ 80 is non-combustible, vapor permeable, water repellent and sound absorbent.

It has also received ICC-ES validated product acceptance in accordance to IRC and IBC for the following uses:

- non-structural thermal insulation in non-fire-resistive rated dwellings
- exterior perimeter insulation around foundation
- under flat concrete slab
- a component of residential wood-framed cathedral ceilings
- and in areas where probability of termite infestation is 'very heavy.'

Learn more at rockwool.com



8024 Esquesing Line, Milton, ON L9T 6W3
Tel: 800-265-6878 • Fax: 800-991-0110
rockwool.com

Return to Residential Applications





Roofing Applications

**Low Slope
Roofing Brochure**

TOPROCK® DD
Flat Roof Technical Data Sheet

TOPROCK® DD PLUS
Bitumen-coated Flat Roof Technical Data Sheet

MULTIFIX™
Flat Roof Technical Data Sheet




Click on any of the above brochures or data sheets to be directed to that specific document.

Visit www.rockwool.com for our full Product Documentation Library.

Low Slope Roofing


Improving Value with Stone Wool Roof Systems

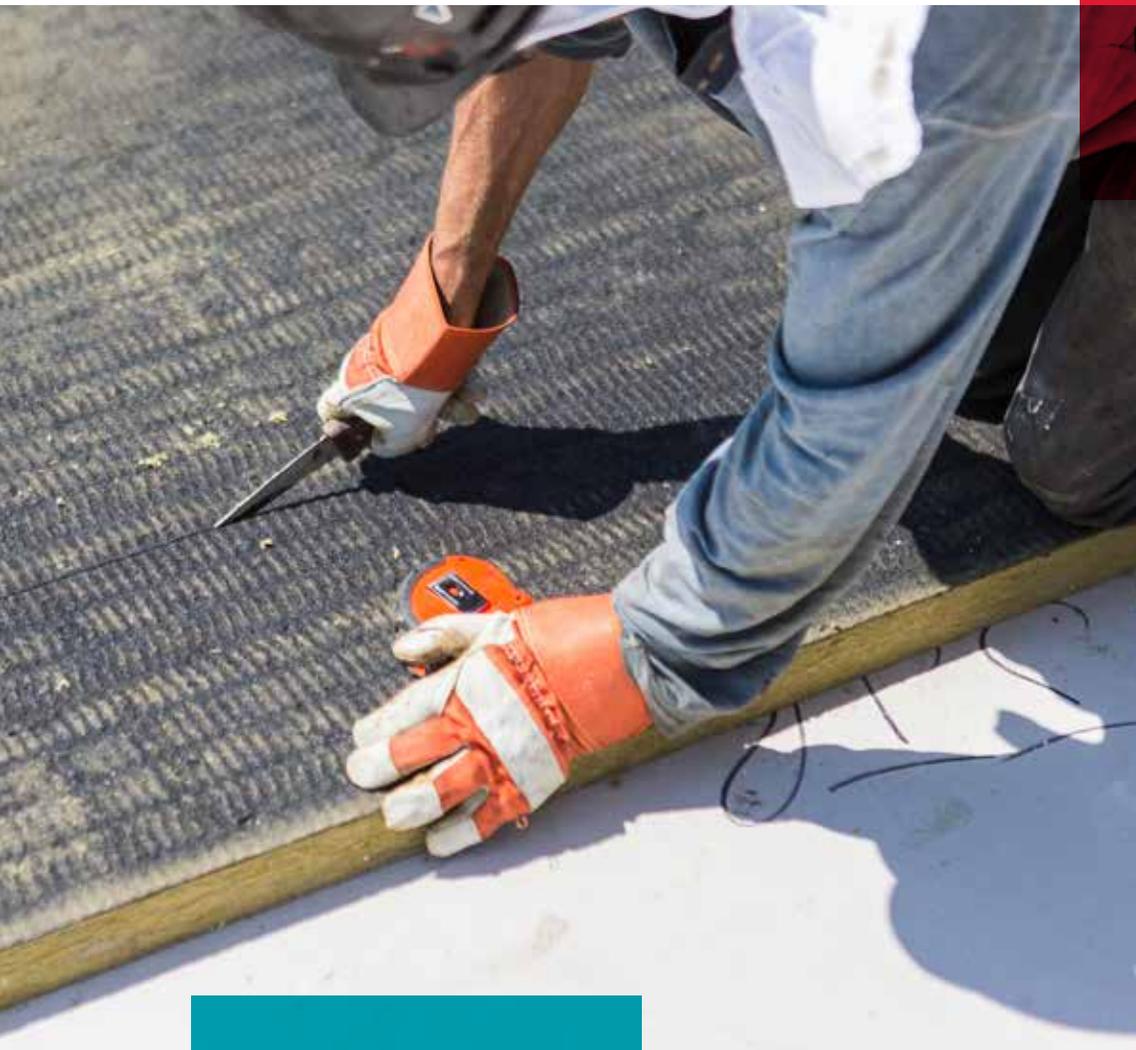

The Value in Stone Wool Roofing Insulation

Our stone wool roof boards provide increased value to low-slope roofing projects due to the inherent benefits offered by stone wool insulation. By utilizing a layer of stone wool above the rest of the thermal insulation in a hybrid system, the stone wool provides added resilience and energy efficiency to improve the overall system. The positive effects of the hybrid solution can begin with as little as 2" of stone wool insulation added and based on energy modeling can be incremental up to 50% of the required R-value before showing decreasing effects in performance benefits.

This layer acts as a thermal buffer between the extreme temperature of the exterior and the thermal insulation, as well as providing added mass for acoustics, increased dimensional stability, fire resistance and impact resistance that can lengthen the life of the roof assembly.

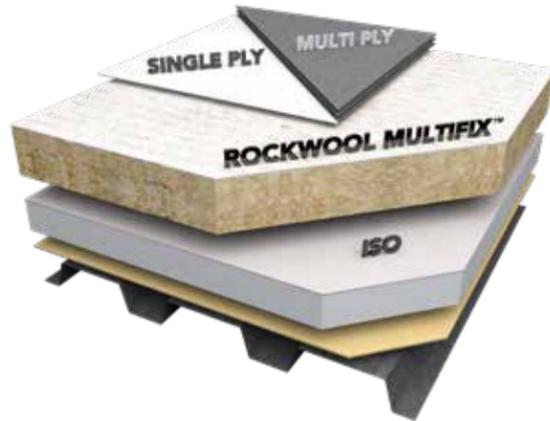

Thermal resistance of stone wool increases at colder temperatures and does not decrease over time, allowing for more predictable, longer-lasting energy performance that provides increased ROI. [Read more pg. 7](#)

Why it matters:

More predictable energy performance allows for properly designed mechanical equipment and longer-lasting performance means saving money.

TOPROCK® DD has a high-density upper layer and a lower-density bottom layer. The high-density upper layer allows for increased compressive strength while the lower-density bottom layer allows for loads to be shared across the entire board. [Read more pg. 10](#)

Why it matters:

Point load resistance is key on flat roofs during construction and maintenance work where occasional foot traffic impacts the boards. The TOPROCK® DD boards also return to their original state once the load is removed.

Made from basalt rock and steel slag, stone wool products are naturally fire resistant, meet the FM 4470 NCC rating requirements and have 0/0 flame and smoke spread ratings. [Read more pg. 10](#)

Why it matters:

Increased fire resistance reduces the risk of a fire event causing damages, loss of business or increased insurance costs. Toxic smoke can cause additional environmental and health concerns.

Non-directional fiber structure and increased mass lead to improved acoustic performance over traditional foam plastic insulations. [Read more pg. 9](#)

Why it matters:

When used in combination with other mass layers, such as gypsum, high sound reduction can be achieved, critical for areas subject to increased noise pollution.

Lower co-efficient of expansion means increased dimensional stability over temperature changes and less gapping between boards. [Read more pg. 8](#)

Why it matters:

Over time, gaps between other insulation products become large and decrease effective thermal resistance.


ROCKWOOL MULTIFIX™

ROCKWOOL MULTIFIX™ is a dual-density, rigid roofing insulation faced with a high-performance mineral coated glass fiber layer.

ROCKWOOL MULTIFIX™ has all the product qualities of our TOPROCK® DD product:

- Insulation and coverboard in one
- Suitable for new building, re-roofing and re-covering applications
- Fire, impact and hail resistant

The glass fiber coating allows the product to be used with a number of different bonding methods for conventional roofing systems.

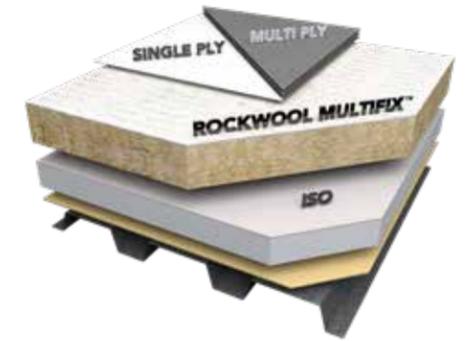

Bonding Method	TOPROCK® DD	TOPROCK® DD Plus	ROCKWOOL MULTIFIX™
Mechanically Fastened	•		•
Torch Applied Membranes		•	•
Hot Mopped Membranes		•	•
Cold Applied Membranes		Some applications, consult ROCKWOOL	•
Self-Adhered/Peel and Stick Membranes			•

Better Adhesion, Better Performance

ROCKWOOL MULTIFIX™ has been tested for compliance with a number of membrane systems in order to prove the performance of this mineral-coated product.

ROCKWOOL MULTIFIX™ has received approval from a number of membrane manufacturers for use in their systems. Better adhesion between the insulation or coverboard and membrane can improve performance in high-wind areas and reduce potential for leaks and moisture in a system.



Roofing Products

TOPROCK® DD

Thermal Roofing Insulation and Coverboard

TOPROCK® DD is a dual-density rigid stone wool roof board available unfaced or with facing for improved adhesion. TOPROCK® DD Plus has a bitumen coating for hot adhered systems. ROCKWOOL MULTIFIX™ has a mineral coated fiber glass facer that is approved for use with hot and cold adhered systems.

- Insulation and coverboard in one
- Suitable for new building, re-roofing and re-covering applications
- Also used in tapered systems for positive drainage
- Standard thicknesses: 2 – 6", .5" increments
- R-value of 3.8 per inch as tested at 75°F per ASTM C518 standard



TOPROCK® DD products are available with two different facing options: bitumen or mineralcoated fiberglass. The bitumen-coated TOPROCK® DD Plus products are used in hot adhered applications such as torch or hot-mopped asphalt. The mineral-coated fiberglass facing used on ROCKWOOL MULTIFIX™ can be used with both hot and cold adhesives.

Building Better With Building Science

Building science research is continuously being conducted to improve the performance of the buildings in order to achieve more effective performance in the building enclosure. The performance of the roof enclosure can have a significant effect on the overall building, especially on large one-story buildings.

Building science research allows for increased building modeling to better reflect the performance of the building once it is in use. For walls, research has shown that the nominal R-value of the insulation is not what you should expect due to the effects of thermal drift, thermal bridging and other factors, and exterior walls have begun to move to an "effective R-value" for the wall rather than nominal. For low-slope roofs, energy codes still rely on nominal R-values; however, better performance can be achieved by looking at the effective performance of the roof system.

More than Just R-value

Modeling the system components together allows additional factors to be considered in the performance of the roof system such as temperature changes, thermal drift, thermal bridging and gaps occurring.

While it never guarantees results, it can allow the owner to better understand the expected performance of their building and not experience sticker shock once the energy bills start to add up.

ROCKWOOL BUILDING SCIENCE (RBS)

We offer building science resources for architects, designers, specifiers, consultants and owners who are looking for information on how to efficiently design or improve their building enclosure systems, including their low-slope roof systems. These knowledgeable building science specialists can review building assemblies and provide quantitative feedback and recommendations that can be implemented into your project.

RBS Team work is completed on an individual project basis and will include good, better and best recommendations that can provide assistance to make informed, educated decisions to increase the overall performance of the building.



Building Science



R-Value Calculations



Thermal Bridging Modeling



Hygrothermal Modeling




Full Building Modeling

Our Solutions

Hybrid Insulation System

A hybrid insulation system utilizes the benefits of two different insulating materials to achieve increased performance. Polyisocyanurate insulation is the most widely used insulation in the low-slope roofing industry due to its high published R-value per inch and its lightweight boards. Using a layer of stone wool insulation as a coverboard on top of the polyiso allows the roof system performance to improve. The stone wool layer moderates the temperature the polyiso is subject to and provides increased dimensional stability for the membrane.

The hybrid system also reduces the need for hard-to use coverboard materials and the number of fasteners or amount of adhesive required in certain systems in order to reduce the installed cost. When exposed to colder temperatures, such as during the winter in northern climates or during the night, the stone wool layer moderates the temperature, keeping it nears its optimum temperature range.

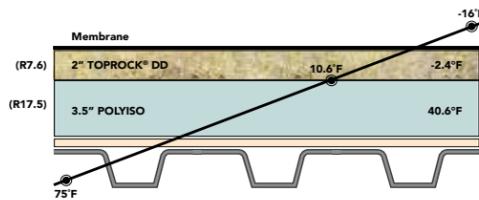

Polyisocyanurate provides an increased R-value per inch, allowing for decreased thickness of the roof system, which can affect the total cost and effective performance of the system.

In the system shown before, the polyiso is subjected to a 40°F temperature average and a 10°F temperature at the top of the layer. Increasing the thickness of the stone wool increases both the average temperature and the temperature at the face of the polyiso layer.

Stone Wool System

Utilizing a full height stone wool system can increase the overall thickness of the roof system, due to the lower R-value per inch, but it can also provide additional benefits over a hybrid system. By utilizing non-combustible materials in the roof system, the risk of a fire event is reduced and insurance premiums may be decreased.

In addition, the stone wool roof system has increased acoustic properties due to the fibers and mass of the stone wool roof boards. Finally, a smart membrane layer on the bottom of the roof system can be used to allow vapor to diffuse through the roof system, allowing the roof to dry any trapped moisture in the roof enclosure.



Stone wool roof boards provide added fire resistance and dimensional stability to the roof system for added resiliency and longevity. The mass of the boards also moderate the temperature of the roof and do not decrease in thermal resistance over time.




Thermal Insulation That Won't Degrade

Thermal Resistance Across Temperatures

The ASTM C518 (C177) standard is conducted at mean temperatures of 25°F (-4°C), 40°F (4°C), 75°F (24°C) and 110°F (43°C), but most R-values are published based on 75°F (24°C). Our roof boards provide increased performance at cold temperatures and drop slightly at warmer temperatures.

The graph below shows the values of an average polyisocyanurate board from testing conducted by the National Roofing Contractors Association (NRCA) and TOPROCK® DD from a third party test.


At colder temperatures, the polyisocyanurate boards perform worse, reducing the overall effectiveness of their thermal resistance. This is most prevalent in cold climates, but can also be seen at night in all climates as the temperature drops. The NRCA has recommended that a design R-value of R5.0/in be used for polyiso in all climates based on their testing published in early 2016.

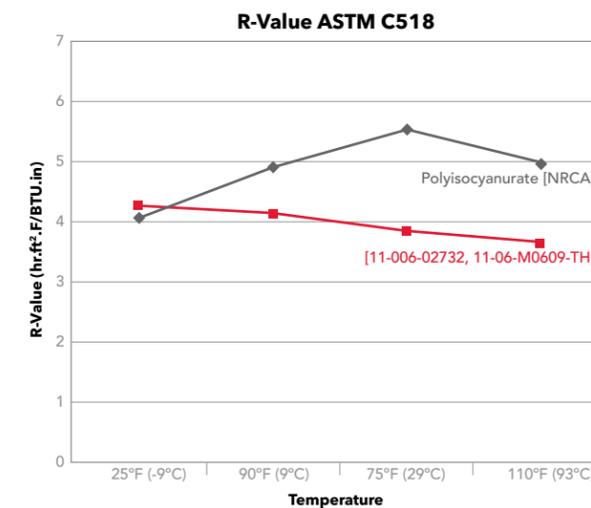

Effects of Aging

In a third party in-situ test conducted by RDH Building Science, polyisocyanurate lost 10% of its nominal R-value at mean 75°F and showed decreases of up to 20% after being aged in the field for three years. The stone wool system showed no decrease in overall thermal performance over the three-year period in the RDH study. As the product is exposed to air, the blowing agents are replaced with the higher conductive air, reducing overall thermal performance of the boards. The rate of expansion depends on many factors of the roof board but has shown to happen rapidly in the first five years of use of the board before finding an equilibrium level. Polyiso products typically report their R-value as an LTTR value, which is a timeweighted average meant to emulate the 180-day R-value of other foam plastic products. However, this means that they will be deficient after that point and they will continue to drop until they reach an equilibrium point.

Our stone wool and other inorganic products do not use blowing agents, so there is no change in the composition of the product over time due to offgassing and stone wool shows no drop in R-value performance. We even provide a Limited 100% Thermal Warranty on our products, guaranteeing that they will not drop in thermal resistance over time.

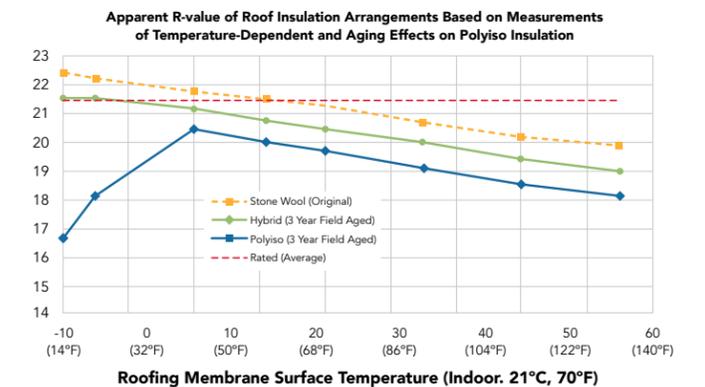



Dimensionally Stable Year after Year

Our stone wool is inherently dimensionally stable, as its co-efficient of linear expansion is small compared to other materials like foam plastics. The larger the co-efficient the more products will expand and contract.


Over time and temperature cycling, some insulating materials never return to their original size, causing gaps to form between the boards. These gaps can significantly affect the thermal performance of roof systems. Oakridge National Laboratory found that 1" gaps between boards (1/2" gaps from each board) caused a 10-15% drop in thermal performance even when two layers of insulation were used.¹

This drop in thermal performance is in addition to the drop expected from the temperature and the effects of aging of the roof boards, therefore the effective performance differs from expected performance based on the design R-value.

Dimensional Stability and Membranes

As the roof boards expand and contract, membranes that are secured directly to those boards move along with them, putting additional stresses on the membrane. Climates that experience great variance in temperatures seen throughout the day and night, as well as seasonally, are at greater risk of seeing membranes fail prematurely due to unnecessary stress caused by the roof boards.

Stone wool roof boards not only have superior dimensional stability to foam plastic insulations, they also increase the thermal capacity of the roof system. This reduces the peaks and valleys that the second thermal insulation layer is exposed to. It also moderates the temperature of the membrane layer, helping to provide additional relief to the stresses membranes are exposed to.

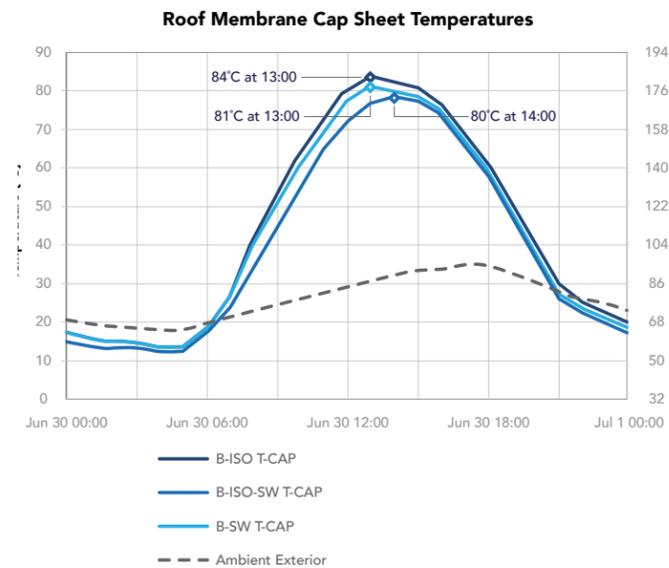

In a third-party study by RDH Building Science, three systems were tested in-situ in Chilliwack, BC to monitor their performance over time. This graph, taken in the first year of the study, highlights the thermal capacity of the stone wool and hybrid systems. In the hybrid system, the peak temperature of the membrane cap sheet is reduced by 3°C and in the stone wool system, the peak is reduced by 4°C and pushed an hour later. This snapshot taken of one day is representative of the moderating effects stone wool can have over time to improve the performance of the roof membrane and help extend the service life of the roof.

For more information on this study, visit rockwool.com or rdh.com

¹Reference: Oakridge National Laboratory. "Effects of Mechanical Fasteners and Gaps between Insulation Boards on Thermal Performance of Low-Slope Roofs"



Sound Absorbent to Improve Comfort


Sound Absorbency Reduces Distractions and Can Improve Health

TOPROCK® DD roof boards are able to provide sound attenuation benefits to low-slope roof systems. TOPROCK® DD roof boards are dual-density, providing increased mass, and their non-directional fibers allow for improved sound-absorbent properties.

Sound absorbency is a key attribute for a number of low-slope roof assemblies. Certain buildings, such as hospitals or schools, request additional sound absorption in order to protect the health of the occupants. Others, such as offices or buildings near airports or other noise polluters, desire additional sound properties in order to limit distractions or interruptions during the course of the day.

TOPROCK® DD products can provide additional sound reduction in combination with the other components of the roof system and work well to provide additional benefits for STC, OITC and other sound reduction ratings for low-slope roofing applications.

TOPROCK® DD products also work well in metal roofing systems where rain driven and impact noise are a large concern.

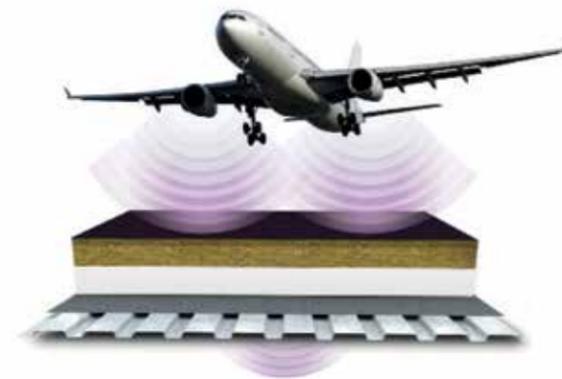

High-performance Roof Enclosures

To meet performance requirements of clients and owners, high-performance roof enclosures require additional layers and resilience. Utilizing alternating layers of gypsum and stone wool creates additional benefits in the roof enclosures. The gypsum coverboards provide reflectance of sound while the fibrous nature of the stone wool provides sound absorbency, allowing for high STC or OITC requirements to be met.

In addition, these systems provide added resiliency by creating redundancy in the roof system to limit damage in the case of roof leaks, a fire event or hail storms. Resilient designs seek to provide more than the minimum to help owners feel comfortable that their roof enclosure will withstand external forces out of their control.

We have tested acoustic assemblies to meet a variety of performance criteria. For information on acoustic designs, contact your local ROCKWOOL roofing or specifications representative or contact our Technical Innovations team via phone at 1-877-823-9790 or by email at contactus@rockwool.com





Fire Resistant Insulation

Our stone wool insulation has a melting point that exceeds the temperatures of most commercial fires, stone wool roofing insulation is non-combustible and will not develop toxic smoke or promote flame spread, even when directly exposed to fire. It meets the requirements for FM 4470 NCC (Non-Combustible Core) rating. Therefore it will not add fuel to an existing fire, making it ideal for high occupancy buildings or those with particular fire concerns. Manufacturing facilities and critical facilities that cannot be disrupted may also desire added fire protection.

Stone wool provides passive fire protection – a strong complement to active systems such as sprinklers. This is important while a building is operational and just as important in the construction and maintenance stages.

Learn More:


Search “Comparative Roof Insulation Fire Test with Tony Crimi” online or go to rockwool.com to see a comparison of common flat roof insulation types with the ASTM E119 fire test.



Impact and Hail Resistant

TOPROCK® DD roof boards have two different densities built into the product. This allows the product to withstand both loads asserted onto the product as well as impact loads (such as hail or foot traffic).

The upper layer of the TOPROCK® DD products is a higher-density, allowing it to deal with heavy loads, and the lower-density layer allows the loads to be spread out across the rest of the board with foot traffic. In addition, the lower-density layer allows the board to return to its original form over time after a load is removed for temporary loading such as construction materials or foot traffic. For areas of heavy traffic or constant loading such as paving stones, an additional coverboard layer is recommended based on good roofing practice.

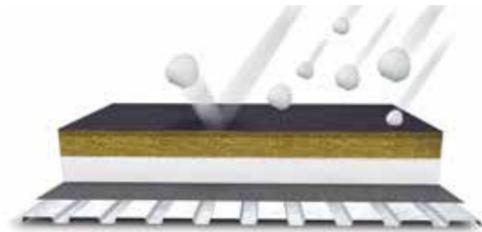

For more information on the impact resistance of our TOPROCK® products, search for our technical bulletin on the subject or contact our Technical Innovations:

Phone: 1-877-823-9790
Email: contactus@rockwool.com

Roofing Projects


Wayne State University – Detroit, MI

In order to meet the energy demands of a growing campus, Wayne State University wanted to reduce the energy usage of their existing buildings by improving their roof systems. They utilized TOPROCK® DD Plus on top of the existing systems or in combination with other insulations to meet their energy requirements.



Flynn Canada Office Building – Toronto, ON

This office building was located near Toronto Pearson International Airport in Toronto, ON. To improve the comfort of their office staff, Flynn Canada decided to improve their roof enclosure with TOPROCK® DD. The new roof system reduced the sound transfer between the nearby air traffic and the interior space, allowing for improved occupant comfort.

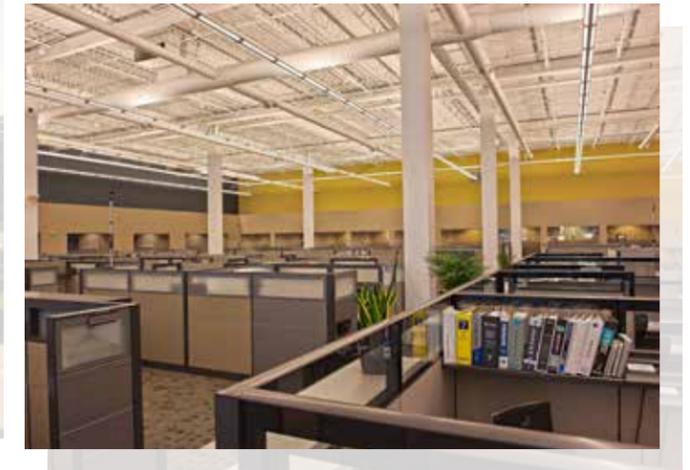

Distribution Warehouse – Quebec City, QC

This warehouse chose to perform a re-cover of their existing roof in order to improve the overall energy efficiency of their building. In order to do so they added 2” of ROCKWOOL MULTIFIX™ to the existing roof system and installed a new membrane over top. This re-cover of their existing roof allows them to increase performance and extend the life of the roof system without tearing off the existing roof or disturbing the use of the building.



GW Williams Secondary School – Aurora, ON

This high school in Aurora, ON was part of a school board initiative to reduce the energy usage of their buildings. In order to do so, they chose to use TOPROCK® DD Plus as part of a hybrid roof system in combination with polyisocyanurate. The polyiso has a high initial R-value that decreases over time which is offset by TOPROCK® DD Plus, providing added dimensional stability and increased thermal capacity.



At the ROCKWOOL Group, we are committed to enriching the lives of everyone who comes into contact with our solutions. Our expertise is perfectly suited to tackle many of today's biggest sustainability and development challenges, from energy consumption and noise pollution to fire resilience, water scarcity and flooding. Our range of products reflects the diversity of the world's needs, while supporting our stakeholders in reducing their own carbon footprint.

Stone wool is a versatile material and forms the basis of all our businesses. With more than 11,000 employees in 39 countries, we are the world leader in stone wool solutions, from building insulation to acoustic ceilings, external cladding systems to horticultural solutions, engineered fibres for industrial use to insulation for the process industry and marine and offshore.

AFB®, CAVITYROCK®, COMFORTBATT®, CONROCK®, CURTAINROCK®, ROCKBOARD®, TOPROCK®, MONOBOARD®, ROXUL® are registered trademarks of the ROCKWOOL Group in USA and ROXUL Inc. in Canada.

ROCKWOOL™, COMFORTBOARD™, FABROCK™, ROXUL SAFE™, ROCKWOOL PLUS™, and AFB evo™ are trademarks of the ROCKWOOL Group in USA and ROXUL Inc. in Canada.

SAFE'n'SOUND® is a registered trademark used under license by Masonite Inc.

Publication date - edition: 01/2018



TOPROCK® DD

Flat Roof Insulation



TOPROCK® DD

Flat Roof Insulation


Technical Data Sheet

Roof Insulation 07220* • Roof Insulation 07 22 00**
Mineral Wool Board Insulation 07 21 13**

ROCKWOOL TOPROCK® DD is a dual-density, mineral wool insulation board for flat roofing applications.

	Performance	Test Standard																
Compliance	Standard Specification for Mineral Fiber Roof Insulation Boards Approval Standard for Single Ply, Polymer Modified Bitumen Sheet, Built-Up Roof and Liquid Applied Roof Assemblies for use in Class 1 and Noncombustible Roof Deck Construction NCC (Non Combustible Core) Rated Roof Insulation	ASTM C726 FM 4470 FM 4470																
Reaction to Fire	Flame spread index = 0; Smoke developed index = 0 Flame spread index = 0; Smoke developed index = 0 Determination of Non Combustibility of Building Materials - Non Combustible Standard Method of Fire Tests for Determining Heat Release Rate of Roofing Assemblies with Combustible Above Deck Roofing Components - Class 1 Fire Tests of Roof Coverings - Class A Fire Spread under Roof Deck Assemblies - See ULC Directory Standard Test Methods for Fire Tests of Roof Coverings - Class A Fire Tests of Building Construction and Materials - See UL Directory	ASTM E84 (UL 723) CAN/ULC S102 CAN/ULC S114 NFPA 276 CAN/ULC S107-03 CAN/ULC S126-06 UL 790 (ASTM E108) UL 263 (ASTM E119)																
Density	Top Layer - 13.75 lb/ft ³ (220 kg/m ³) Bottom Layer - 10 lb/ft ³ (160 kg/m ³) - for 2" (50.8 mm) and 2.5" (63.5 mm) thickness Bottom Layer - 9.36 lb/ft ³ (150 kg/m ³) - for >2.5" (63.5 mm) thicknesses	ASTM C303 ASTM C303 ASTM C303																
Dimensional Stability	Linear Shrinkage - 0.71% @ 1200°F (650°C) Linear Change 7 days @ -40°F (-40°C), ambient RH - 0.1% Linear Change 7 days @ 200°F (93°C), ambient RH - 0.1% Linear Change 7 days @ 158°F (70°C), 97% RH - 0.0%	ASTM C356 ASTM D2126																
Hail Performance	Test Standard for Susceptibility to Hail Damage - Class 1 - SH (Severe Hail) Impact Resistance by Impacting with Freezer Ice Balls - Class 4 Impact Resistance of Prepared Roof Covering Materials - Class 4	FM 4470 FM 4473 UL 2218																
Thermal Resistance	<table border="1"> <tr> <td>Mean Temperature</td> <td>R-Value</td> <td>RSI Value</td> </tr> <tr> <td>75°F (24°C)</td> <td>3.8 hr.ft².F/Btu</td> <td>0.68 m²/K/W</td> </tr> <tr> <td>25°F (-4°C)</td> <td>4.3 hr.ft².F/Btu</td> <td>0.74 m²/K/W</td> </tr> <tr> <td>40°F (4°C)</td> <td>4.2 hr.ft².F/Btu</td> <td>0.72 m²/K/W</td> </tr> <tr> <td>110°F (43°C)</td> <td>3.6 hr.ft².F/Btu</td> <td>0.64 m²/K/W</td> </tr> </table>	Mean Temperature	R-Value	RSI Value	75°F (24°C)	3.8 hr.ft ² .F/Btu	0.68 m ² /K/W	25°F (-4°C)	4.3 hr.ft ² .F/Btu	0.74 m ² /K/W	40°F (4°C)	4.2 hr.ft ² .F/Btu	0.72 m ² /K/W	110°F (43°C)	3.6 hr.ft ² .F/Btu	0.64 m ² /K/W	ASTM C518 (C177)	
Mean Temperature	R-Value	RSI Value																
75°F (24°C)	3.8 hr.ft ² .F/Btu	0.68 m ² /K/W																
25°F (-4°C)	4.3 hr.ft ² .F/Btu	0.74 m ² /K/W																
40°F (4°C)	4.2 hr.ft ² .F/Btu	0.72 m ² /K/W																
110°F (43°C)	3.6 hr.ft ² .F/Btu	0.64 m ² /K/W																
Reaction to Moisture	Moisture Sorption - 0.15% Water Absorption - <1.0% Water Vapor Transmission, Desiccant Method - 2330 ng/Pa.s.m ² (41 perm)	ASTM C1104 ASTM C209 ASTM E96																
Compressive Strength	Top Layer - 20psi (140kPa) @ 10%, 37psi (250kPa) @ 25% Entire Board - 11psi (75kPa) @ 10%, 15psi (105kPa) @ 25% Point Load @ 5 mm Compression - 30psi (205 kPa)	ASTM C165 EN 12430																
Corrosion Resistance	Stress Corrosion Cracking Tendency of Austenitic Stainless Steel - Passed Corrosion of Steel - Passed	ASTM C795 ASTM C665																
Thickness Dimensions	Product available in 2" - 6" (50.8 mm - 152.4 mm) in 1/2" (12.7 mm) increments 48" x 48" (1219 mm x 1219 mm)																	
Acoustical Performance	<table border="1"> <tr> <td>Thickness</td> <td>125 Hz</td> <td>250 Hz</td> <td>500 Hz</td> <td>1000 Hz</td> <td>2000Hz</td> <td>4000 Hz</td> <td>NRC</td> </tr> <tr> <td>2'</td> <td>0.5</td> <td>0.71</td> <td>0.85</td> <td>0.9</td> <td>0.96</td> <td>1.01</td> <td>0.85</td> </tr> </table> <p>Contact ROCKWOOL for STC rated assemblies</p>	Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000Hz	4000 Hz	NRC	2'	0.5	0.71	0.85	0.9	0.96	1.01	0.85	ASTM C423 ASTM E90
Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000Hz	4000 Hz	NRC											
2'	0.5	0.71	0.85	0.9	0.96	1.01	0.85											

Dimensionally Stable
Low co-efficient of linear expansion means less movement during temperature changes and no shrinking over time causing energy loss.

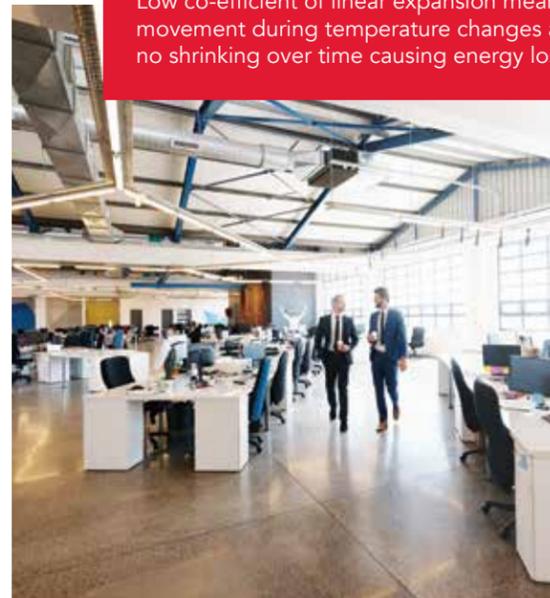

ROCKWOOL TOPROCK® DD is a high-density, uncoated stone wool insulation board for low-slope roof applications. TOPROCK® DD is a suitable substrate board for all low-slope roof decks and is compatible as the substrate for mechanically attached membrane systems.

TOPROCK® DD is non-combustible and will not develop toxic smoke or promote flame spread, even when directly exposed to fire. It can be used either as a base layer of thermal insulation in an assembly with TOPROCK® DD Plus or as the top layer of a hybrid roof assembly with polyisocyanurate or other roof insulations.

TOPROCK® DD has exclusive stone wool dual-density properties that feature a higher-density top layer, providing strong point load resistance and effective load distribution to minimize puncture damage to the membrane – particularly during installation.

Learn more at rockwool.com



Issued 01-01-18
Supersedes 08-23-17

NOTE: *Master Format 1995 Edition **Master Format 2004 Edition. As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warranty the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.



8024 Esquesing Line, Milton, ON L9T 6W3
Tel: 800-265-6878 • Fax: 800-991-0110
rockwool.com

Return to Roofing Applications



TOPROCK® DD PLUS

Bitumen-coated Flat Roof Insulation



TOPROCK® DD PLUS

Bitumen-coated Flat Roof Insulation

Technical Data Sheet
 Roof Insulation 07220* • Roof Insulation 07 22 00**
 Mineral Wool Board Insulation 07 21 13**

ROCKWOOL TOPROCK® DD PLUS is a dual-density, bitumen-coated, mineral wool insulation board for flat roofing applications.

	Performance	Test Standard															
Compliance	Standard Specification for Mineral Fiber Roof Insulation Boards Approval Standard for Single Ply, Polymer Modified Bitumen Sheet, Built-Up Roof and Liquid Applied Roof Assemblies for use in Class 1 and Noncombustible Roof Deck Construction NCC (Non Combustible Core) Rated Roof Insulation	ASTM C726*** FM 4470 FM 4470															
Reaction to Fire	Flame spread index = 0; Smoke developed index = 0 Flame spread index = 0; Smoke developed index = 0 Determination of Non Combustibility of Building Materials - Non Combustible Standard Method of Fire Tests for Determining Heat Release Rate of Roofing Assemblies with Combustible Above Deck Roofing Components - Class 1 Fire Tests of Roof Coverings - Class A Fire Spread under Roof Deck Assemblies - See ULC Directory Standard Test Methods for Fire Tests of Roof Coverings - Class A Fire Tests of Building Construction and Materials - See UL Directory	ASTM E84 (UL 723)*** CAN/ULC S102*** CAN/ULC S114 NFPA 276 CAN/ULC S107-03 CAN/ULC S126-06 UL 790 (ASTM E108) UL 263 (ASTM E119)															
Density	Top Layer - 13.75 lb/ft ³ (220 kg/m ³) Bottom Layer - 10 lb/ft ³ (160 kg/m ³) - for 2" (50.8mm) and 2.5" (63.5mm) thickness Bottom Layer - 9.36 lb/ft ³ (150 kg/m ³) - for >2.5" (63.5mm) thicknesses	ASTM C303 ASTM C303 ASTM C303															
Dimensional Stability	Linear Shrinkage - 0.71% @ 1200°F (650°C) Linear Change 7 days @ -40°F (-40°C), ambient RH - 0.1% Linear Change 7 days @ 200°F (93°C), ambient RH - 0.1% Linear Change 7 days @ 158°F (70°C), 97% RH - 0.0%	ASTM C356 ASTM D2126															
Hail Performance	Test Standard for Susceptibility to Hail Damage - Class 1 - SH (Severe Hail) Impact Resistance by Impacting with Freezer Ice Balls - Class 4 Impact Resistance of Prepared Roof Covering Materials - Class 4	FM 4470 FM 4473 UL 2218															
Thermal Resistance	<table border="1"> <thead> <tr> <th>Mean Temperature</th> <th>R-Value</th> <th>RSI Value</th> </tr> </thead> <tbody> <tr> <td>75°F (24°C)</td> <td>3.8 hr.ft².F/Btu</td> <td>0.68 m²K/W</td> </tr> <tr> <td>25°F (-4°C)</td> <td>4.3 hr.ft².F/Btu</td> <td>0.74 m²K/W</td> </tr> <tr> <td>40°F (4°C)</td> <td>4.2 hr.ft².F/Btu</td> <td>0.72 m²K/W</td> </tr> <tr> <td>110°F (43°C)</td> <td>3.6 hr.ft².F/Btu</td> <td>0.64 m²K/W</td> </tr> </tbody> </table>	Mean Temperature	R-Value	RSI Value	75°F (24°C)	3.8 hr.ft ² .F/Btu	0.68 m ² K/W	25°F (-4°C)	4.3 hr.ft ² .F/Btu	0.74 m ² K/W	40°F (4°C)	4.2 hr.ft ² .F/Btu	0.72 m ² K/W	110°F (43°C)	3.6 hr.ft ² .F/Btu	0.64 m ² K/W	ASTM C518 (C177)
Mean Temperature	R-Value	RSI Value															
75°F (24°C)	3.8 hr.ft ² .F/Btu	0.68 m ² K/W															
25°F (-4°C)	4.3 hr.ft ² .F/Btu	0.74 m ² K/W															
40°F (4°C)	4.2 hr.ft ² .F/Btu	0.72 m ² K/W															
110°F (43°C)	3.6 hr.ft ² .F/Btu	0.64 m ² K/W															
Reaction to Moisture	Moisture Sorption - 0.15% Water Absorption - <1.0% Water Vapor Transmission, Desiccant Method - 2330 ng/Pa.s.m ² (41 perm)	ASTM C1104 ASTM C209 ASTM E96															
Compressive Strength	Top Layer - 20psi (140kPa) @ 10%, 37psi (250kPa) @ 25% Entire Board - 11psi (75kPa) @ 10%, 15psi (105kPa) @ 25% Point Load @ 5 mm Compression - 30psi (205 kPa)	ASTM C165 EN 12430															
Corrosion Resistance	Stress Corrosion Cracking Tendency of Austenitic Stainless Steel - Passed Corrosion of Steel - Passed	ASTM C795 ASTM C665															
Thickness Dimensions	Product available in 2" - 4" (50.8 mm - 101.6 mm) in 1/2" (12.7 mm) increments 48" x 48" (1219 mm x 1219 mm)																

Acoustical Performance	Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000Hz	4000 Hz	NRC	ASTM C423
	2'	0.5	0.71	0.85	0.9	0.96	1.01	0.85	

Contact ROCKWOOL for STC rated assemblies




Issued 01-01-18
 Supersedes 08-23-17

NOTE: *Master Format 1995 Edition **Master Format 2004 Edition***. As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warranty the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.

Simplified Application

A pre-applied coating makes it compatible with both torch and mop applied membranes and simplifies the application process – saving time and costs.

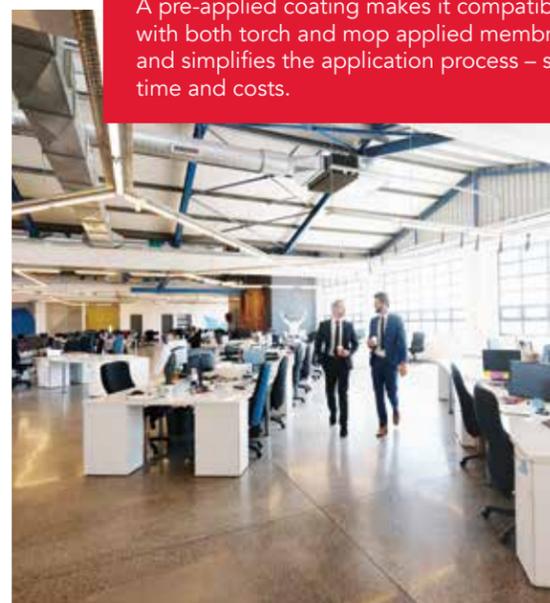

ROCKWOOL TOPROCK® DD Plus is a high-density, bitumen-coated stone wool insulation board for low-slope roof applications. It is compatible as the substrate for the following membrane attachment types: torched, hot mopped and self-adhered.

It has excellent acoustic properties and can be used either as a top layer of thermal insulation in an assembly with TOPROCK® DD or as the top layer of a hybrid roof assembly with polyisocyanurate or other roof insulations.

TOPROCK® DD Plus has exclusive stone wool dual-density properties that feature a higher-density top layer, providing strong point load resistance and effective load distribution to minimize puncture damage to the membrane – particularly during installation.

Learn more at rockwool.com




8024 Esquesing Line, Milton, ON L9T 6W3
 Tel: 800-265-6878 • Fax: 800-991-0110
rockwool.com

Return to Roofing Applications




MULTIFIX

Flat Roof Insulation

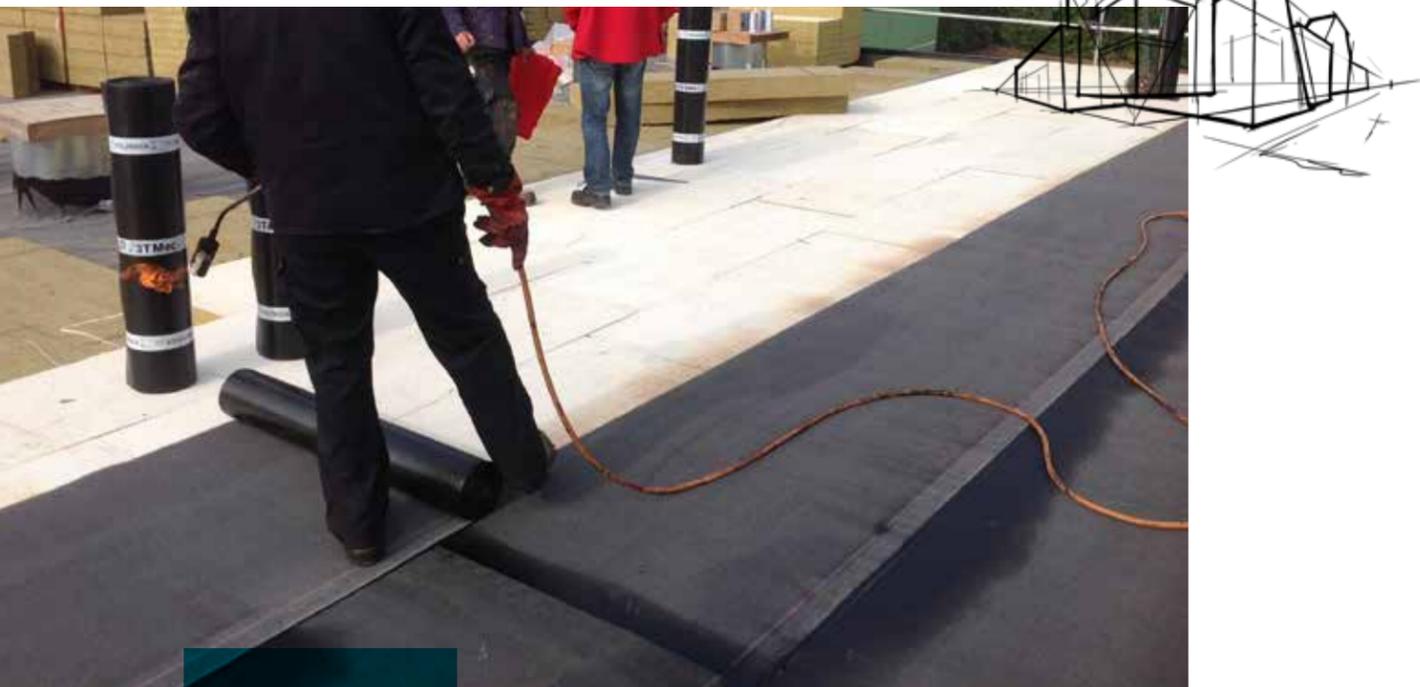

Energy-saving Performance
 Low co-efficient of thermal expansion provides for overall dimensional stability, resulting in optimal thermal performance.

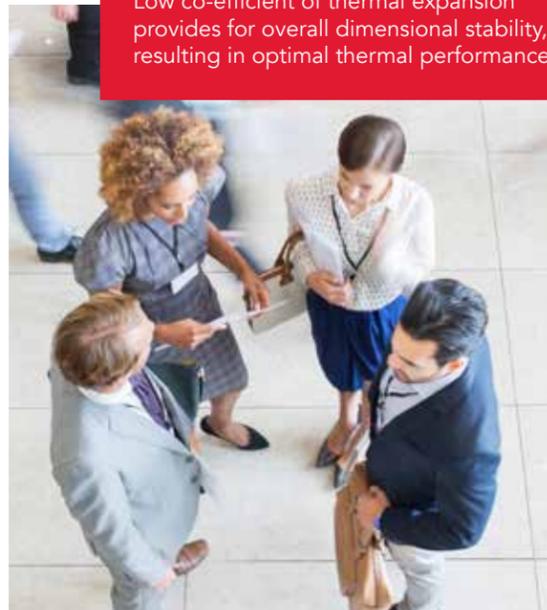

ROCKWOOL TOPROCK® DD MULTIFIX™ is the first stone wool insulation product with a mineral-coated fiberglass facer that is compatible with multiple attachment methods including torched, hot-mopped, self-adhered, cold-adhered and liquid systems.

It can be used as an insulating coverboard over other insulations. In these cases, it improves performance by regulating the temperature of the thermal insulation. In fact, just one layer improves the performance of the entire assembly.

TOPROCK® DD MULTIFIX™ has exclusive stone wool dual-density properties that feature a higher-density top layer, providing strong point load resistance and effective load distribution to minimize puncture damage to the membrane – particularly during installation.

Learn more at rockwool.com



MULTIFIX

Flat Roof Insulating Coverboard

Technical Data Sheet

Roof Insulation 07220* • Roof Insulation 07 22 00**
 Mineral Wool Board Insulation 07 21 13**

ROCKWOOL TOPROCK® DD MULTIFIX is a dual-density, mineral wool insulation board with a glass fiber coating for flat roofing applications.

	Performance	Test Standard															
Compliance	Standard Specification for Mineral Fiber Roof Insulation Boards Approval Standard for Single Ply, Polymer Modified Bitumen Sheet, Built-Up Roof and Liquid Applied Roof Assemblies for use in Class 1 and Noncombustible Roof Deck Construction NCC (Non Combustible Core) Rated Roof Insulation	ASTM C726 FM 4470 FM 4470															
Reaction to Fire	Flame spread index = 0; Smoke developed index = 0 Flame spread index = 0; Smoke developed index = 0 Determination of Non Combustibility of Building Materials - Non Combustible Standard Method of Fire Tests for Determining Heat Release Rate of Roofing Assemblies with Combustible Above Deck Roofing Components - Class 1 Fire Tests of Roof Coverings - Class A Fire Spread under Roof Deck Assemblies - See ULC Directory Standard Test Methods for Fire Tests of Roof Coverings - Class A Fire Tests of Building Construction and Materials - See UL Directory	ASTM E84 (UL 723) CAN/ULC S102 CAN/ULC S114 NFPA 276 CAN/ULC S107-03 CAN/ULC S126-06 UL 790 (ASTM E108) UL 263 (ASTM E119)															
Density	Top Layer - 13.75 lb/ft ³ (220 kg/m ³) Bottom Layer - 10 lb/ft ³ (160 kg/m ³) - for 2" (50.8mm) and 2.5" (63.5mm) thickness Bottom Layer - 9.36 lb/ft ³ (150 kg/m ³) - for >2.5" (63.5mm) thicknesses	ASTM C303 ASTM C303 ASTM C303															
Dimensional Stability	Linear Shrinkage - 0.71% @ 1200°F (650°C) Linear Change 7 days @ -40°F (-40°C), ambient RH - 0.1% Linear Change 7 days @ 200°F (93°C), ambient RH - 0.1% Linear Change 7 days @ 158°F (70°C), 97% RH - 0.0%	ASTM C356 ASTM D2126															
Hail Performance	Test Standard for Susceptibility to Hail Damage - Class 1 - SH (Severe Hail) Impact Resistance by Impacting with Freezer Ice Balls - Class 4 Impact Resistance of Prepared Roof Covering Materials - Class 4	FM 4470 FM 4473 UL 2218															
Thermal Resistance	<table border="1"> <tr> <td>Mean Temperature</td> <td>R-Value</td> <td>RSI Value</td> </tr> <tr> <td>75°F (24°C)</td> <td>3.8 hr.ft².F/Btu</td> <td>0.68 m²/K/W</td> </tr> <tr> <td>25°F (-4°C)</td> <td>4.3 hr.ft².F/Btu</td> <td>0.74 m²/K/W</td> </tr> <tr> <td>40°F (4°C)</td> <td>4.2 hr.ft².F/Btu</td> <td>0.72 m²/K/W</td> </tr> <tr> <td>110°F (43°C)</td> <td>3.6 hr.ft².F/Btu</td> <td>0.64 m²/K/W</td> </tr> </table>	Mean Temperature	R-Value	RSI Value	75°F (24°C)	3.8 hr.ft ² .F/Btu	0.68 m ² /K/W	25°F (-4°C)	4.3 hr.ft ² .F/Btu	0.74 m ² /K/W	40°F (4°C)	4.2 hr.ft ² .F/Btu	0.72 m ² /K/W	110°F (43°C)	3.6 hr.ft ² .F/Btu	0.64 m ² /K/W	ASTM C518 (C177)
Mean Temperature	R-Value	RSI Value															
75°F (24°C)	3.8 hr.ft ² .F/Btu	0.68 m ² /K/W															
25°F (-4°C)	4.3 hr.ft ² .F/Btu	0.74 m ² /K/W															
40°F (4°C)	4.2 hr.ft ² .F/Btu	0.72 m ² /K/W															
110°F (43°C)	3.6 hr.ft ² .F/Btu	0.64 m ² /K/W															
Reaction to Moisture	Moisture Sorption - 0.15% Water Absorption - <1.0% Water Vapor Transmission, Desiccant Method - 2330 ng/Pa.s.m ² (41 perm)	ASTM C1104 ASTM C209 ASTM E96															
Compressive Strength	Top Layer - 20psi (140kPa) @ 10%, 37psi (250kPa) @ 25% Entire Board - 11psi (75kPa) @ 10%, 15psi (105kPa) @ 25% Point Load @ 5 mm Compression - 30psi (205 kPa)	ASTM C165 EN 12430															
Corrosion Resistance	Stress Corrosion Cracking Tendency of Austenitic Stainless Steel - Passed Corrosion of Steel - Passed	ASTM C795 ASTM C665															
Thickness Dimensions	Product available in 2" - 4" (50.8 mm - 101.6 mm) in 1/2" (12.7 mm) increments 48" x 48" (1219 mm x 1219 mm)																

Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000Hz	4000 Hz	NRC	ASTM C423
2'	0.5	0.71	0.85	0.9	0.96	1.01	0.85	

Contact ROCKWOOL for STC rated assemblies

ASTM E90



Issued 01-01-18
 Supersedes 08-23-17

NOTE: *Master Format 1995 Edition **Master Format 2004 Edition. As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warranty the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.



8024 Esquesing Line, Milton, ON L9T 6W3
 Tel: 800-265-6878 • Fax: 800-991-0110
rockwool.com

Return to Roofing Applications



Master Guide Specs


07 21 13 – Board Insulation

07 21 16 – Blanket Insulations

07 22 00 – Roof and Deck Insulation

23 07 16 – Equipment Insulation

23 07 19 – Piping Insulation

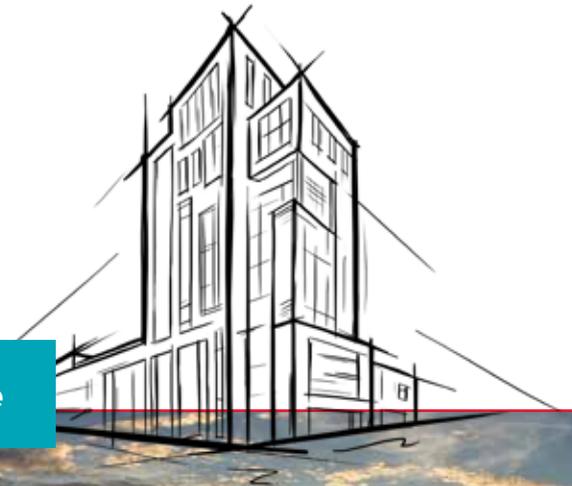

Stone wool insulation • Isolant en laine de roche



Fire Resistant
Résistant au feu



Sound Absorbent
Absorption sonore



Saves Energy
Écoénergétique



Water Repellent
Résistant à l'eau



Made From Stone
Fabriqué à partir de roche



[Return to Cover](#)

